INFRASTRUCTURE OF SERBIAN RAILWAYS JSC

NETWORK STATEMENT 2025

Adopted by the Shareholders' Meeting of "Infrastructure of Serbian Railways" JSC

No: 5/2023-525-204 dated December 12th, 2023

Effective as of December 15th, 2024

Applicable to 2024/2025 Timetable

На основу члана 20. став 6. Закона о железници ("Службени гласник РС", бр. 41/18 и 62/23) и члана 17. став 1. и члана 43. став 2. Закона о Влади ("Службени гласник РС", бр. 55/05, 71/05 - исправка, 101/07, 65/08, 16/11, 68/12 - УС, 72/12, 7/14 - УС, 44/14 и 30/18 - др. закон),

Влада доноси

РЕШЕЊЕ О ДАВАЊУ САГЛАСНОСТИ НА ОДЛУКУ О ВИСИНИ ЦЕНА ПРИСТУПА И ЦЕНА ПРИСТУПА ДЕЛУ ЈАВНЕ ЖЕЛЕЗНИЧКЕ ИНФРАСТРУКТУРЕ КОЈИ ПОВЕЗУЈЕ СА УСЛУЖНИМ ОБЈЕКТИМА ЗА РЕД ВОЖЊЕ 2024/2025

I

Даје се сагласност на Одлуку о висини цена приступа и цена приступа делу јавне железничке инфраструктуре који повезује са услужним објектима за Ред вожње 2024/2025, коју је донела Скупштина Акционарског друштва за управљање јавном железничком инфраструктуром "Инфраструктура железнице Србије", Београд, на седници од 21. септембра 2023. године.

II

Ово решење објавити у "Службеном гласнику Републике Србије".

05 Број: 338-11265/2023

У Београду, 20. новембра 2023. године

ВЛАДА

Тачност преписа оверава

ГЕНЕРАЛНИ СЕКРЕТАР

ПРЕДСЕДНИК

Ана Брнабић, с.р.



Amendments, corrections, and interpretations

No	Subject	Determined by the Decision No.	Valid as of
1.	7.3.5, Appendices 3.11 and 6	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision 5/2024-535- 212 dated Aprl 2 nd 2024	April 2 nd , 2024
2.	1.1; 4.2; Appendices 1, 3.10 and 4.1.b	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision 5/2024-542- 215 dated May 29th 2024	May 29 th , 2024
3.	1.1; 2.2; 2.3.1; 2.3.13; 7.3.3; Appendices 1, 3.6a and 3.10	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2024- 554-221 dated September 26 th 2024	September 26 th , 2024
4.	2.3.10; 2.3.11; 2.3.12; 2.3.13; 2.4.7; 2.4.8; Appendices 3.5, 3.11, 4.2, 6, 8 and 10	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2024- 557-222 dated October 23 th , 2024	October 23 th , 2024
5.	5.9	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2024- 579-224 dated November 14 th , 2024	November 14 th , 2024
6.	1.1; 2.2.2; 2.4.7; 5.4; Appendices 3.4, 3.11 and 6	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2024 - 583-227 dated December 12 th , 2024	December 12 th , 2024
7.	1.1; 2.4.8; 4.6;7.3.4; Appendices 1, 3.11 and 6	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2025- 591-233 dated March 17 th , 2025	March 17 th , 2025
8.	1.1; 2.3.1 Appendices 3.11 and 6	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2025- 601-237 dated June 6 th , 2025	June 6 th , 2025
9.	1.1; 7.3.4 Appendices 1 and 3.11	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision No 5/2025- 610-241 dated August 28 th , 2025	August 28th, 2025



TABLE OF CONTENTS

TERMS AND ABBREVIATIONS	
1. GENERAL INFORMATION	
•	
1.3.1 Legal Framework	
1.3.2 Legal Status and Liability	
1.3.3 Appeals Procedure	
	16
	16
1.5.1 Validity Period of the Network Statement	
1.5.2 Updating Process	
1.5.3 Publishing, Distribution and Availability of the	
	17
•	17
1.7.1 Rail Freight Corridors	
1.7.2 RailNetEurope	
2. INFRASTRUCTURE	
2.2.1 Limits	
2.2.2 Connecting Railway Networks	
2.3.1 Geographic data and types of railway lines	
2.3.2 Track Gauges	
2.3.3 Stations and Nodes	
2.3.4 Loading Gauge	
2.3.5 Weight Limits	
2.3.6 Line Gradients	
2.3.7 Maximum Line Speeds	
2.3.8 Maximum Train Lengths	
2.3.9 Power Supply	
2.3.10 Signalling Systems	
2.3.11 Traffic Control Systems	
2.3.12 Communication Systems	
2.3.13 Train Control Systems	
2.4 Traffic Restrictions	31
2.4.1 Specialised Infrastructure	31
2.4.2 Environmental Restrictions	31
2.4.3 Dangerous Goods	31
2.4.4 Tunnel Restrictions	
2.4.5 Bridge Restrictions	
2.5 Availability of the Infrastructure	
2.6 Infrastructure Development	
3. ACCESS CONDITIONS	
3.1 Introduction	
3.2 General Access Requirements	
3.2.1 Conditions for Applying for Capacity	
3.2.2 Conditions for Access to the Railway Infrastruc	
3.2.3 Licenses	
3.2.4 Safety Certificate	
3.2.5 Coverage for Civil Liability (Insurance)	
	37
3.3.1 Framework Agreement	



	3.2 Contracts with RUs	
3.4 S	pecific Access Requirements	38
3.4	Rolling Stock Acceptance	38
3.4	4.2 Staff Acceptance	38
3.4	4.3 Exceptional Transport	38
3.4	1.4 Transport of Dangerous Goods	39
4. CAP	ACITY ALLOCATION	
4.1	Introduction	40
4.2.	Description of infrastructure capacity allocation procedure	
4.3	Allocation of capacity for maintenance, including the allocation process	
4.4.	Impact of Framework Agreements	
4.5	Schedule for Path Requests and Allocation Process	
	5.1 Schedule of requests submission for new annual timetabling process	
	5.2 Schedule of requests submission for train path allocation during annual Timetable valid	
	ough regular and special amendments of and supplements to the Timetable	
	5.3 Allocation of capacities during annual Timetable validity period on ad hoc request	
	5.4 Path Allocation and Coordination Process	
	5.5 Dispute Resolution Process	
4.6	Congested Infrastructure	
4.7.	Exceptional Transports and Dangerous Goods	
4.7.	Rules After Path Allocation	43 17
	Rules After Paul Affocation	
	3.2. Rules of Cancellation	
4.9.	International Timetabling Process Redesign (TTR)	
	9.1. Objectives of TTR	
	RVICES AND CHARGES	
5.1	Introduction	
5.2	Charging Principles	
5.3	Minimum Access Package and Charges	
5.4	Additional Services and Charges	
5.5	Ancillary Services and Charges	
5.6	Discounts	
5.7	Performance Scheme	
5.8	Changes to Charges	
5.9	Billing Arrangements	
5.10	Tariff system	
6. OPE	RATIONS	63
6.1	Introduction	63
6.2	Operational Rules	63
6.3	Operational Measures	63
6.3	3.1. Principles	63
6.3	3.2. Operation regulation	63
6.3	3.3. Foreseen and Unforeseen problems	64
7. SER	VICE FACILITIES	65
7.1.	Introduction	65
7.2.	Service Facility Overview	65
7.3.	Service Facilities Managed by IŽS	65
7.3	3.1. Common Provisions	65
	3.2 Use of station buildings in the function of passenger traffic	
	3.3 Freight Terminals	
	3.4 Marshalling Yards and Train Formation Facilities, including Shunting Facilities	
	3.5 Storage Sidings	
	3.6 Maintenance facilities	
	3.7 Other Technical Facilities, including Cleaning and Washing Facilities	
	3.8 Maritime and Inland Port Facilities	
	3.9 Relief Facilities	
	3.10 Refuelling Facilities	
,	2.20 2.20.20.20 7 memore 2.20.20.20.20.20.20.20.20.20.20.20.20.20	70



APPENDICES	80
Appendix 1: Organizational chart of "Infrastructure of Serbian Railways" JSC	81
Appendix 2: Internal regulations (documents) and technological procedures	82
Appendix 3.1. Loading Gauge ŽS I	83
Appendix 3.2. Loading Gauge UIC-GA	84
Appendix 3.3. Loading Gauge UIC-GB	85
Appendix 3.3a Loading Gauge UIC-GC	86
Appendix 3.4. Electrified lines	87
Appendix 3.5 Power supply facilities	88
Appendix 3.6 Overview of signaling & safety devices equipping level	91
Appendix 3.6a Request for issuance of encryption keys for communication in the ETCS system	
Appendix 3.7 Overview of telecommunication devices equipping level	96
Appendix 3.8. List of service points where it is possible to perform the transshipment of dangerous go	ods 103
Appendix 3.9. Alternative transport routes	107
Appendix 3.10. Facilities for rolling stock maintenance	
Appendix 3.10a. Information on the service facility managed by Nelt Co	
Appendix 3.11. Railway infrastructure development projects	
Appendix 4.1. Request for train path allocation (form)	
Appendix 4.1a. Request for train path allocation (e-papir)	
Appendix 4.1b Template for submission of traction vehicle technical data	128
Appendix 4.2. Instruction for completion of the Request for train path allocation	
Appendix 4.3. Deadlines for annual 2024/2025 timetable preparation	
Appendix 4.4. Deadlines for amendments to annual 2024/2025 Timetable	
Appendix 5.1. Overview of railway lines on which train running is possible when they are manned on	
engine driver	
Appendix 5.2. Overview of the lines that do not meet the conditions for train running with an engine	e driver
only	
Appendix 5.3. Geometry of pantograph (current collector) TIP POS - 254/III used on IŽS network	
Appendix 6. Register of infrastructure data	
Appendix 7. Overview of primary train delay causes	
Appendix 8. Overview of platforms and arranged surfaces in service points	
Appendix 9. Method for calculation of electricity consumption for train traction	
Appendix 10. Railway node boundaries	177



TERMS AND ABBREVIATIONS

Terms:

Public railway infrastructure

Infrastructure Manager

Railway Undertaking

Freight Terminal

Transport License

Applicant

Ad hoc request

Network

Path

Timetable

Infrastructure capacity
Congested

means the entire railway infrastructure constituting a network operated by the infrastructure manager, but not including the railway lines and secondary tracks (industrial railway lines and industrial tracks) connected to the network; is a public enterprise or a company responsible for construction, exploitation, maintenance, and rehabilitation of railway infrastructure on the network, as well as for participation in its development within the general policy of infrastructure development and financing;

is a company or other legal entity, registered for the prevailing activity of provision of freight and/or passenger railway transport services, to whom the license was issued, with an obligation to provide train traction or that provides train traction only. In terms of access to railway infrastructure, service facilities and services in connection to performing of railway transport, a railway undertaking is also a company or other legal entity that performs railway transport for its own purposes and to whom the license for transport for its own purposes was issued;

is a facility along the railway lines with freight transport, specifically arranged in order to enable loading of goods onto the freight trains and/or unloading of goods from such trains, as well as integration of services of railway freight transport with the services of road, maritime, inland waterway and air transport, i.e. forming or changing the composition of freight trains, and, if necessary, it is used to implement the border procedures at the borders with other countries;

is a document by which a relevant licensing authority confirms the capacity of a company or other legal entity, registered for provision of the activity of public transport of goods and/or passengers, to provide railway transport services as a railway undertaking, which can be limited to the provision of certain types of services or the provision of railway transport for own purposes;

means a railway undertaking or an international grouping of railway undertakings, or other persons or legal entities, such as competent authorities, consignors, forwarding agents or combined transport operators, having the commercial interest for provision of public service or commercial interest for allocation of railway infrastructure capacity;

is a request for individual train paths submitted during the validity of the established timetable;

is a network of railway lines, including the connecting lines and secondary tracks, with elements of railway infrastructure, operated by the Infrastructure Manager; intended for railway transport of goods and/or passengers, as well as for transport for own purposes, which can be performed by railway undertakings according to the principle of transparent and non-discriminatory access to the network:

is the capacity of railway infrastructure necessary for train movement between two service points, within the envisaged period of time and under the precisely determined technical and technological conditions on the public railway infrastructure;

is a formal document of the public railway infrastructure manager setting out the schedule of operation for passenger and freight trains as well as for trains operated for own purposes on the public railway infrastructure of the infrastructure manager;

is a possible number of train paths for timetabling on the particular part of public railway infrastructure over a given period of time;

is a section of railway infrastructure for which infrastructure capacity demand



infrastructure

cannot be completely satisfied during certain time periods, even after different

infrastructure capacity requests have been coordinated;

Path allocation

is the allocation of public railway infrastructure capacities by the infrastructure

manager;

Access right

is the right of a railway undertaking to use the railway infrastructure;

Coordination

is a process whereby the infrastructure manager and applicants make an

adjustment of individual requests for path allocation;

Safety Certificate

means evidence that a railway undertaking has established the safety management system and that it meets the requirements set out in the technical specifications of interoperability, national safety regulations and other relevant regulations in order to control the risks and perform safe railway traffic

operations on the network;

Competent institution, Relevant authority (body)

is an authority entitled to adopt various decisions relating to particular fields;

Relevant Railway Authority is an authority entitled to adopt various decisions relating to particular fields,

Service Facility
Operator

is an authority authorised to act regarding the administrative issues in the railway sector of the Republic of Serbia (Directorate for Railways or the Ministry of Construction, Transport and Infrastructure, as the case may be). is an entity responsible for operating one or more service facilities or for providing one or more services to railway undertakings (basic, additional and/or accompanying), including operating of railway infrastructure which forms a part of a service facility.

Information about service facility

is a document containing detailed information necessary for access to a service facility and services (basic, additional and accompanying) with reference to performing of railway transport provided by the operator in that service facility.



The abbreviations used in the Network Statement have the following meanings:

ATC Automatic Train Control

AGC European Agreement on Main International Railway Lines

AGTC European Agreement on Important International Combined Transport Lines and Related

Installations

EU European Union FTE Forum Train Europe IM Infrastructure Manager

MCTI Ministry of Construction, Transport and Infrastructure of the Republic of Serbia

MF Ministry of Finance of the Republic of Serbia

NS Network Statement
DG Dangerous goods
OSS One-Stop-Shop

RID (2017) Regulations concerning the international carriage of dangerous goods by rail

RNE RailNetEurope (European Infrastructure Managers Association)

UIC International Union of Railways

DR Directorate for Railways – Regulatory Body in the Republic of Serbia

IŽS "Infrastructure of Serbian Railways" JSC

EMU Electric multiple-unit set DMU Diesel multiple-unit set

TOR Top of rail

RS Republic of Serbia

LTDG Law on Transport of Dangerous Goods ("Official Gazette of the RS" no. 106/2016,

9

83/2018, 95/2018 (other law), 10/2019 (other law))

GSM-R Global System for Mobile Communications – Railway

ERTMS European Rail Traffic Management System

ETCS European Train Control System



1. GENERAL INFORMATION

1.1 Introduction

"Infrastructure of Serbian Railways" JSC (hereinafter IŽS) is a joint stock company for the management of public railway infrastructure (hereinafter: railway infrastructure), founded by the Republic of Serbia.

Railway infrastructure represents goods in general use, owned by the Republic of Serbia, that can be used by railway undertakings, on equal terms, in accordance with the Law on Railways.

Management of railway infrastructure is an activity of general interest.

Railway infrastructure includes permanent way and substructure, tunnels, bridges and other track structures, station tracks, level crossings including devices for securing of level crossings; safety, signaling and telecommunication installations on open lines, in stations and marshalling yards, including the plants for generating, transforming and distribution of electric energy for signaling and telecommunications; buildings for such installations or plants; track brakes; plants for transformation and transmission of electric energy for train traction: 110 kV two-phase transmission lines, sub-stations except for 110 kV distribution switchgear in such substation, supply cables between substations and contact wire, catenary and girders, third rail with beams, lighting installation for traffic and safety needs, service points' buildings and other facilities on trackside land used for regulation of railway traffic including the part of the equipment for calculation and charging of transport charges and buildings for railway infrastructure maintenance, accesses for passengers and goods, including road access and access to passengers for arrival and departure of pedestrians, track-side land and the airspace above the track, 12 m high, i.e. 14m high at over 220kV overhead power lines, measured from the top of rail.

The Network Statement is a document that contains all the information in accordance with the Law on Railways of the Republic of Serbia ("Official Gazette of the RS" No. 41/18 and 62/23).

The document is compliant to all the norms set forth under the guidelines provided by the association RailNetEurope (hereinafter RNE) and shall be used as informative material for the interested railway undertakings. Moreover, the Network Statement has been harmonized with relevant EU Directives.

Network Statement provides general information on railway network, terms and conditions for access to railway infrastructure, principles and criteria for allocation of capacities, principles for charge calculation and their amounts, procedures for dispute resolution and other important details for usage of services provided to railway undertakings.

Infrastructure Manager Basic Information

Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade (hereinafter: Company) was founded with the Decision on founding of Joint Stock Company for Public Railway Infrastructure Management ("Official Gazette of the RS", no.60/15 and 73/15) and registered in the registry of Serbian Business Registers Agency, under the number BD 69692/2015 from August 10, 2015.

The founder of the Company is the Republic of Serbia, as the sole stakeholder of the Company, of behalf of which the founder's right is enforced by the Government of the Republic of Serbia, Belgrade, Nemanjina 11, company number 07020171. The Company is under the jurisdiction of the Ministry of Construction, Transport and Infrastructure.

Business company name: Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade

Abbreviated Company Name: "Infrastructure of Serbian Railways" JSC



Company Headquarters is in Belgrade, and the address of company's headquarters is 6 Nemanjina, Belgrade.

The main activity of company is "Service activities in land transport", activity code is 5221.

Company Reg. No is 21127094, TIN 109108420.

Company Business Accounts are 205-222959-26 and 160-438771-53.

The main activity of the Company includes: Service activities in land transport. The activity includes the management of public railway infrastructure in the segment of maintenance of public railway infrastructure, organization and control of railway traffic, provision of access and use of public railway infrastructure to all interested railway undertakings and protection of public railway infrastructure. The company performs the activity of general interest in accordance with the law. The company may also perform other activities in accordance with the law. The company performs the activities and services in domestic and international trade in accordance with the law.

Responsible persons: Acting General Manager Zoran Jevtić Tel.: +381 11 3618 330 kabinet.infrastruktura@srbrail.rs

Infrastructure Manager Organisational Chart

The organizational structure of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade is based on the Rulebook on organization and systematization of operations of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade.

Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade, (hereinafter: the Company), in order to perform the activities of management of public railway infrastructure, is organized according to the groups of operations, as follows:

- operations that are organizationally related to the General Manager,
- operations that are organizationally related to the General Manager's Office,
- organization and control of railway traffic,
- maintenance of railway infrastructure,
- economic operations,
- development, investments and modernization of railway infrastructure,
- human resources management and common affairs, and
- procurement, warehousing operations and real estate."

The Company operations are performed within its departments, divisions, sections, units, technical-technological divisions, stations and operational sections and other lower organizational forms.

The management of public railway infrastructure includes the maintenance of public railway infrastructure, the organization and control of railway traffic, the provision of access and use of public railway infrastructure to all interested railway undertakings, the protection of public railway infrastructure, as well as the performing of investor function in construction and reconstruction of public railway infrastructure.

The operations performed within the Company are traffic engineering, relief train, civil engineering and electrical engineering operations, development, investment, project management operations, as well as common affairs: financial, planning and analysis, restructuring and cooperation with international financial institutions, accounting, public procurement and warehousing operations, human resources management, occupational health and safety, operations related to property and inventory-taking, information technologies implementation and development operations, internal security, international affairs and ethic's office operations. Furthermore, the operations that are related to the General Manager and the operations that are organizationally related to the General Manager's Office are also performed within the Company in order to



implement the operative, professional and administrative functions, as well as corporate affairs regarding the monitoring of compliance of Company's operations with the internal and external requirements: policies, plans, procedures, laws, regulations and agreements.

The operations referred to in the previous paragraph are performed within:

- 1. Traffic Department,
- 2. Railway Infrastructure Access Department,
- 3. Department for Maintenance of Railway Station Buildings and Other Service Facilities,
- 4. Centre for Infrastructure Technical Monitoring,
- 5. Civil Engineering Department,
- 6. Electrical Engineering Department,
- 7. Centre for Railway Infrastructure Testing and Diagnostics,
- 8. Centre for Infrastructure Rail Vehicles Maintenance System Management,
- 9. Centre for Relief Train Operations,
- 10. Finance Department,
- 11. Centre for Planning, Analysis and Restructuring,
- 12. Accounting Department,
- 13. Inventory Department,
- 14. Investment Department,
- 15. Department for EU-Funded Projects Management (PIU),
- 16. Development Department,
- 17. Department for Technical Preparation,
- 18. Human Resources and General Affairs Department,
- 19. IT Department,
- 20. Centre for Security,
- 21. Centre for International Affairs,
- 22. Ethic's Office,
- 23. Procurement Department,
- 24. Warehousing Department,
- 25. Real Estate Department,
- 26. Centre for Internal Audit,
- 27. Centre for Internal Control,
- 28. Company's Management Secretariat,
- 29. Legal Department,
- 30. Centre for Safety Management System,
- 31. Media Centre.

The Organizational Chart of "Infrastructure of Serbian Railways" JSC is provided in Appendix 1.

Contact details

"Infrastructure of Serbian Railways" JSC contact details are the following:

Acting General Manager

Zoran Jevtić

Tel.: +381 11 3618 330

kabinet.infrastruktura@srbrail.rs

Traffic Department Nemanjina 6

11000 Belgrade, Serbia

Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.sp@srbrail.rs



Railway Infrastructure Access Department Nemanjina 6 11000 Belgrade, Serbia Serbia Tel.: +381 11 3618 214/ Fax: +381 11 3616 814 sektor.pzi@srbrail.rs

Civil Engineering Department Nemanjina 6 11000 Belgrade, Serbia

Tel: +381 11 3618 248 Fax: +381 11 3616 874 infr.sektorzagp@srbrail.rs

Electrical Engineering Department Nemanjina 6 11000 Belgrade, Serbia Tel: +381 11 3618 241 Fax: +381 11 3618 130 etp@infrazs.rs

Centre for Relief Train Operations Nemanjina 6 11000 Belgrade, Serbia Tel.: +381 11 3620 899 Fax: +381 11 3620 899 radomir.brkic@infrazs.rs

Warehousing Department Nemanjina 6 11 000 Belgrade, Serbia stovarista.infra@srbrail.rs

Finance Department Nemanjina 6 11 000 Belgrade, Serbia Tel.: +381 11 3618 465 Fax: +381 11 3618 465 finansijeizs@srbrail.rs

1.2 Purpose of the Network Statement

The purpose of this Network Statement is provision of single source basic information to the users of services provided to railway undertakings on the railway infrastructure operated by IŽS.

The Network Statement is a document which sets out the detailed general rules, deadlines, procedures and criteria related to the manner of calculation of charges and allocation of infrastructure capacities, including other relevant information necessary for submitting the request for infrastructure capacity allocation.

The Network Statement will be published on the web site of "Infrastructure of Serbian Railways" JSC, www.infrazs.rs, and the decision on its adoption will be published in the "Official Gazette of ŽS".

1.3 Legal Aspects

The functioning of infrastructure and traffic on the network operated by "Infrastructure of Serbian Railways" JSC is regulated by:



- legislation of the Republic of Serbia,
- formal documents of the Infrastructure Manager "Infrastructure of Serbian Railways" JSC,
- formal documents and technological procedures of the railway undertakings falling within the scope indicated in the above legislation.

1.3.1 Legal Framework

Regulations of the Republic of Serbia

Regulations of the Republic of Serbia of particular importance to this Network Statement include the following documents:

- Law on Railways ("Official Gazette of the RS", No. 41/18 and 62/23);
- Law on Interoperability of Railway System ("Official Gazette of the RS", No. 62/23);
- Law on Safety in Railway Traffic ("Official Gazette of the RS", No. 41/18")
- Regulation on Categorization of Railway Lines that belong to Public Railway Infrastructure ("Official Gazette of the RS", No. 92/20, 6/21, 33/22 and 63/23);
- Rules on Railway Infrastructure Elements ("Official Gazette of the RS", No.30/19);
- Rules on the Timetable ("Official Gazette of the RS", No. 58/19 and 1/2020);
- Regulation on Methodology for Valuation of the Elements for Determining the Level of Charge for the Use of Railway Infrastructure ("Official Gazette of the RS", No. 122/14);
- Rules on the Manner of Transport and Mandatory Operational Monitoring of Dangerous Goods Carried by Rail, as well as on the Obligations of the Participants in the Transport of Dangerous Goods by Rail and Emergencies ("Official Gazette of the RS", No. 81/15);
- Rules on training programme and method of knowledge checking of employees and of participants of dangerous goods transport in the railway transport, as well the manner in which the documentation is processed and their training ("Official Gazette of the RS", No. 81/15);
- Law on Transport of Dangerous Goods, passed by the National Assembly of the Republic of Serbia ("Official Gazette of the RS", No. 104/2016-34, 83/2018-57, 95/2018-389 (other law), 10/2019-13 (other law));
- Rules on Mandatory Elements of the Contract on the Use of Railway Infrastructure ("Official Gazette of the RS", No. 8/2019);
- Rules on Special Loads Transport ("Official Gazette of the RS", No. 74/19);
- Regulation on the Manner of Conclusion and Content of Framework Agreements for Allocation of Railway Infrastructure Capacity ("Official Gazette of the RS" No. 74/19);
- Regulation on Particularities of Procedures and Criteria Applicable to Access to the Services Provided in Service Facilities ("Official Gazette of the RS" No. 57/19 and 13/20);
- Rules on the Elements of Service Facility Information ("Official Gazette of the RS" No. 66/19).

International Regulations

When using the allocated train path, the railway undertaking must abide by all legal norms contained in the sources of international law (Convention concerning International Carriage by Rail (COTIF), its annexes, agreements and protocols governing the cross-border railway traffic and border control, UIC standards and any other relevant international regulations) as well as in the national laws and bylaws.



Formal documents of the Infrastructure Manager

Internal regulations (formal documents) and technological procedures of the Infrastructure Manager are listed in Appendix 2.

1.3.2 Legal Status and Liability

The Network Statement is based on the legal framework defined in section 1.3.1. In case of any ambiguities or legal proceedings, the relevant provisions of the legislation of the Republic of Serbia will apply.

The present Network Statement has been developed on the basis of the information available at the moment of drafting thereof. IŽS is liable for accuracy of the information given in the present Network Statement. All regulations and technical documentation which become effective upon publishing of this Network Statement shall apply and shall be taken into consideration on the occasion of construing this Network Statement.

IŽS is not liable for the accuracy of data published herein, which are submitted by the service facility operators.

1.3.3 Appeals Procedure

Appeals procedure in respect of the Network Statement, and in respect of other formal documents of the Infrastructure Manager relating to the path allocation procedure and use of railway infrastructure, is governed by the Law on Railways.

The function of the regulatory body for the railway sector is performed by the Directorate for Railways (hereinafter: the Directorate), as a separate organization which runs the railway-specific state administration affairs as set forth in the Law on Railways.

The scope of the Directorate for Railways has been set out in Articles 118-129 of the Law on Railways ("Official Gazette of the RS" No. 41/2018 and 62/23) and by the provisions of the Law on Safety of Railway Transport ("Official Gazette of the RS" No.41/2018).

Article 120 of the Law on Railways provides that the Directorate is in charge of the following:

- regulation of railway services market;
- licensing of railway undertakings;
- passenger rights;
- safety in railway traffic and interoperability of railway system;
- cableway;
- realization of international cooperation within its scope of competence;
- other tasks in accordance with this law and other laws governing the area of safety in railway transport, interoperability of railway system and cableways for transport.

The applicant for train path allocation may lodge a complaint with the Directorate for Railways against the decision made by the Infrastructure Manager to reject its application for path allocation or against the established conditions for supply of infrastructure capacity, and also when it is not satisfied with the train path allocation procedure and its outcome, subject to payment of a fee in the amount of administrative fee charged for the appeals to the authority.

As a regulatory body, the Directorate deliberates, in the segment of regulation of railway services market, on the complaints lodged by applicants for train path allocation, especially taking into account any potential unfair treatment or discrimination by the Infrastructure Manager or railway undertakings, in connection with:

- (1) the Network Statement,
- (2) the criteria set out in the Network Statement,
- (3) the train path allocation procedure and its outcome,



- (4) the method for determining the charge for the use of train path;
- (5) the level or structure of charges for the use of train path which it is or may be obliged to pay,
- (6) information about service facilities;
- (7) the application of provisions of article 13 of the Law on Railways and particularly of access and charges.

The decision of the Directorate is final. The appeal against it may be lodged with the Administrative Court within 30 days of its receipt.

1.4 Structure of the Network Statement

The structure of 2025 Network Statement is in accordance with the general structure for network statements of the European Railway Association (RailNetEurope association) which is applied by most infrastructure managers in Europe in the process of network statement preparation.

The general structure of Network Statement is reviewed as necessary and the latest version is available on the RNE's web-site. The objective of general structure is that all applicants and interested parties may find the same information at the same place in the Network Statement.

The Network Statement consists of 7 chapters that make up the basic document and a series of attachments that contain additional information.

Table No 1. Network Statement Structure

No	Chapter	Description
1.	General information	Contains the general information about Network Statement and contacts
2.	Infrastructure	Contains the description of the network operated by JSC "Infrastructure of Serbian Railways" (IŽS)
3.	Access conditions	Provides a specification of conditions, which will be met by the railway undertaking, prior to gaining the track access
4.	Capacity allocation	Provides the principles and criteria for infrastructure capacities allocation
5.	Services and charges	Provides an overview of services provided by "Infrastructure of Serbian Railways" JSC and charges
6.	Operations	Contains operational rules
7.	Service facilities	Provides an overview of service facilities connected to rail network operated by IŽS

1.5 Validity Period, Updating and Publishing

1.5.1 Validity Period of the Network Statement

This Network Statement shall be valid during the timetable validity period, from December 15th, 2024 to December 13th, 2025.

The Network Statement shall be published not later than two months prior to the commencement of the final deadline for submission of applications for path allocation and shall remain valid during the entire timetable validity period.



1.5.2 Updating Process

The Network Statement will be updated in case of change of important pieces of information published in the Network Statement. Any amendment to the Network Statement will be published separately in the "Official Gazette of Serbian Railways", whereas the updated (amended) Network Statement will be published on the "Infrastructure of Serbian Railways" JSC website.

1.5.3 Publishing, Distribution and Availability of the Network Statement

The Network Statement will be published on the "Infrastructure of Serbian Railways" JSC website (www.infrazs.rs), both in Serbian and English languages.

If so requested by a railway undertaking, "Infrastructure of Serbian Railways" JSC may provide the Network Statement or a part of it, free of charge, in electronic format.

1.6 Contacts

Contacts relevant for information contained in the Network Statement:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6, Nemanjina St. 11000 Belgrade Serbia Tel.: +381 11 3618 214

Fax: +381 11 3616 814 sektor.pzi@srbrail.rs

1.7 Cooperation Between European IMs/ABs

1.7.1 Rail Freight Corridors

The Pan-European Corridor X from Salzburg in Austria to Thessaloniki in Greece stretches via the infrastructure network of "Infrastructure of Serbian Railways" JSC. On the territory of the Republic of Serbia, on the network of "Infrastructure of Serbian Railways" JSC, Corridor X includes the following railway lines from Šid to Preševo:

- Belgrade Šid State border,
- Belgrade Mladenovac Niš,
- (Belgrade) Rakovica Jajinci Mala Krsna Velika Plana,
- Niš Preševo State border.

The following branches connect to the primary route of the Corridor:

- Xb, (Budapest) Novi Sad Belgrade (railway line (Belgrade) Stara Pazova Subotica), and
- Xc, Niš Dimitrovgrad (Sofia Istanbul) (railway line Niš Dimitrovgrad State border).

Infrastructure of Serbian Railways is a member of Railway Freight Corridor Alpine-Western Balkans (RFC 10). The corridor connects five countries: Austria, Slovenia, Croatia, Serbia and Bulgaria. The corridor route goes from Svilengrad in Bulgaria, via Sofia, Belgrade, Zagreb to Zidani Most in Slovenia, where the route branches off to two routes via Maribor, Gratz to Wels and via Ljubljana, Villach to Salzburg. The corridor covers 2,114 km of main lines and 31 km of connecting lines. There are 21 intermodal terminals and 12 marshalling yards on the corridor.

More details on the corridor are available on its website https://www.rfc-awb.eu/.



1.7.2 RailNetEurope

RailNetEurope association (hereinafter RNE) was established in January 2004 by virtue of an agreement between 12 Infrastructure Managers from the entire Europe, and their number is constantly rising.

Through its members, RNE operates over 230,000 km long railway lines, including the important ferry lines, and cooperates with more than 120 railway undertakings in international traffic and with more than 300 railway undertakings that, for the time being, operate only in the domestic traffic of the members.

The main efforts are put towards enhancing the access conditions and performance of international railway transport, particularly with respect to operability. To achieve this, RNE is focused on the overall process of international transport operations. It starts with harmonization of mid-term and long-term planning of particular members, joint marketing and sales approach, appropriate planning and operation, and ends with provision of services after transport has been performed, such as monitoring, control and assessment of performed transport.

One of the first steps towards progressive harmonization was creation of a structure model for the preparation of Network Statement, applied by all RNE members.

One of the most important RNE steps was creation of an international network of One Stop Shop offices.

The list of all RNE members and further information on this association may be found at www.railneteurope.com.

"Infrastructure of Serbian Railways" JSC is a full member of the association from April 21, 2016.

One Stop Shop - OSS

Infrastructure Managers have opened national One Stop Shop (OSS) offices that jointly make up a network of contact points for the users within the RNE. As regards the international path allocation applications, the users only need to contact one of these OSSs that will initiate the entire process of international path allocation.

In close cooperation with other IMs, the contacted OSS will:

- offer support and information to undertakings on the entire range of Infrastructure Managers' products and services along the whole route;
- provide all information on the conditions for access to the infrastructure of any Infrastructure Manager within the RNE;
- process the applications for international path allocation within the RNE;
- make sure that all the applications for the next year's Timetable are timely taken into account during preparation of the annual Timetable;
- provide offers for railway paths on the entire route in international traffic.

In accordance with its motto "one face to the customer", the OSS provides professional and efficient assistance via all border crossings, underpinned by transparent procedures based on trust and non-discrimination. The list of contacts by member countries is available at www.railneteurope.com.

"Infrastructure of Serbian Railways" JSC, as a RNE member, conducts intensive activities on defining the procedures so as to implement the OSS in the near future in the railway sector of the Republic of Serbia.

RNE tools

Since 2005, the RNE has taken over the full responsibility for preparation of the international timetable and the support to its activities; it operates the following information systems: for path coordination - PCS (Path



Coordination System), for charging - CIS (Charging Information System) and for train information - TIS (Train Information System).

PCS

PCS (Path Coordination System) – is an international path request coordination system for path applicants i.e. railway undertakings, infrastructure managers and allocation bodies. This web-based application optimises international path coordination by ensuring that path requests and offers are harmonised by all involved parties. The input for international path requests needs to be entered only once into the system – either via the domestic application or directly into the PCS. More information is available on: http://pcs.RNE.eu/.

CIS

CIS (Charging Information System) — is an infrastructure charging information system for railway undertakings, infrastructure managers and allocation bodies. This web-based application provides fast information on charges related to the use of the European rail infrastructure and estimates the charge for the use of international train paths within minutes. This is an umbrella application for various national rail infrastructure charging systems. More information is available on: http://cis.RNE.eu/.

TIS

TIS (Train Information System) – is a web-based application which manages the operation of international trains by delivering information on movements of international passenger and freight trains in real time. These data are obtained directly from the system. More information is available on: http://tis.RNE.eu/.



2. INFRASTRUCTURE

2.1 Introduction

The purpose of this section is to provide the information on the railway infrastructure owned by the Republic of Serbia and managed by IŽS, to provide the description and overview of the characteristics of the railway lines and appertaining facilities and equipment that can be used by all those to whom the access to and use of infrastructure have been granted in accordance with the provisions of the Law on Railways. Other information on the IŽS network can be found on the website www.infrazs.rs.

Information on the railway infrastructure published in this document is based on the facts that were familiar at the time of its preparation. All changes occurring after publishing of this document will be updated on the website www.infrazs.rs.

2.2 Extent of Network

The total structural length of standard-gauge lines on the territory of "Infrastructure of Serbian Railways" JSC network amounts to 3 357.341 km, out of which 3 012.201 km of single-track and 345.140 km of double-track lines. The above-mentioned line length includes 1 758.971 km of main lines and 1 598.37 km of other lines. The total of 1 313.257 km of open tracks have been electrified, together with main running tracks (968.117 km of single-track and 345.140 km of double-track lines).

The total length of electrified lines - open tracks and main running tracks is 1 659.525 km. All the above data relate to standard-gauge 1435 mm tracks. More detailed information is available in Appendix 6.

In addition, "Infrastructure of Serbian Railways" JSC also operates the museum-tourist railway line - "Shargan Eight" - which is 22.471 km long and whereof track gauge is 760 mm.

2.2.1 Limits

In terms of ownership and management of public railway infrastructure, there is only one railway network in the Republic of Serbia and this is a state-owned network, managed by IŽS. Therefore, the term "limit" also means state borders which at the same time represent borders with the neighbouring railway networks.

The IŽS railway network borders with the neighbouring railway networks are the following border stations: Subotica, Horgoš, Kikinda, Vršac, Bogojevo, Šid, Brasina, Preševo, Đeneral Janković, Vrbnica and Dimitrovgrad.

Upon crossing of state borders, the track gauge remains unchanged.

The type of traction is changed only at the border crossing with the Republic of Bulgaria, at Dimitrovgrad station on the railway line Niš-Dimitrovgrad-State Border.

2.2.2 Connecting Railway Networks

The railway network of the Republic of Serbia is connected with the railway networks of the following seven countries: Croatia, Hungary, Romania, Bulgaria, North Macedonia, Montenegro and Bosnia and Herzegovina. Traffic can be organized via ten border crossings, while one border-crossing is under the control of UNMIK.

For more detailed information please refer to Table No 2. The names of neighbouring countries' stations in the table are given in authentic form, as registered in the official timetables.

The term joint border station means a border station in which border control is jointly performed by the competent state authorities, as well as traffic handover between the railway undertakings. Joint border stations are governed by bilateral state agreements. Performing of traffic handover in other border stations is within decision—making domain and agreement between the railway undertakings.



Table No 2. Border crossings, border railway lines and border stations

abi	e No 2. Border crossi	ngs, border railway lines and b	order stations	ı	
	Neighbouring country	Border railway lines	Border stations	Neighbouring infrastructure manager	Note
1	Croatia	Šid-State Border -Tovarnik	Šid Tovarnik	HŽI	
1	Croatia	Bogojevo-State Border- Erdut	Bogojevo Erdut	HŽI	
		Subotica-State Border- Kelebia	Subotica Kelebia	MAV Zrt	
2	Hungary	Horgoš-State Border- Roszke	Subotica Roszke	MAV Zrt	In case of freight trains, each country conducts the border police and customs' inspections on its own territory, wheras for passenger trains, joint border control is performed in Roszke station.
3	Romania	Vršac- State Border - Stamora Moravita	Vršac Stamora Moravita	CFR SA	
		Kikinda-State Border- Jimbolia	Kikinda Jimbolia	CFR SA	
4	Bulgaria	Dimitrovgrad-State Border Dragoman	Dimitrovgrad Dragoman	NKŽI	
		Preševo- State Border Tabanovci	Preševo/ Ristovac Tabanovci	IŽRSM	Joint border station Tabanovci
5	North Macedonia	Đeneral Janković - State Border -Volkovo	Đeneral Janković	IŽRSM	Temporary under the supervision of UNMIK Railways
6	Montenegro	Vrbnica - State Border – Bijelo Polje	Vrbnica / Bijelo Polje	ŽICG	Joint border station Bijelo Polje
7	Bosnia and Herzegovina	Brasina - State Border — Zvornik Novi	Brasina Zvornik Novi	ŽRS	

Within the national network, the public railway infrastructure operated by IŽS is connected with other railway infrastructures in the Republic of Serbia. The sidings of Elektroprivreda Srbije and HBIS Group Serbia Iron & Steel" d.o.o. are connected to IŽS national railway network.

21



These sidings are used for transport of goods for own needs (industrial railways) and they do not belong to the national railway network.

Railway infrastructure operated by IŽS is also connected with a number of railway industrial sidings owned by the business entities.

For other information on railway infrastructure operated by IŽS, which are not contained and presented herein, please contact IŽS at the following address:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St., 11000 Belgrade, Serbia Phone.: +381 11 3618 214

Phone.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs

2.3 Network Description

2.3.1 Geographic data and types of railway lines

General network information is given in Table No. 3.

Table No 3. Structural length of the lines within the network

Total network length	3 357.341 km
Single-track lines	3 012.201 km
Double track lines	345.140 km
Narrow-gauge lines	22.471 km*
Non-electrified lines	2 044.084 km
Electrified lines	1 313.257 km

^{*} Narrow-gauge line Šargan Vitasi – Mokra Gora – State Border (Višegrad)

Types of railway lines

Pursuant to the Regulation on categorization of railway lines that belong to public railway infrastructure ("Official Gazette of the RS", No. 92/20, 6/21, 33/22 and 63/23) applied by the "Infrastructure of Serbian Railways" JCS, railway lines are classified as main lines, regional lines, local lines, shunting lines and museum-tourist lines.

Pursuant to the law governing the railways, railway lines are classified as follows:

- 1. main lines- of importance to international and domestic service;
- 2. regional lines of importance to regional and local service;
- 3. local lines of importance to local service;
- 4. shunting lines of importance to business entities,
- 5. museum-tourist railway lines.

Main lines with associated line number are:

- 101 Belgrade Centre-S. Pazova-Šid-State border-(Tovarnik);
- 102 Belgrade Centre Junction "G"- Rakovica-Mladenovac-Lapovo-Niš-Preševo-State border-(Tabanovce);
- 103 (Belgrade Centre)- Rakovica-Jajinci-M.Krsna-V.Plana;
- 104 (Jagodina) Ćuprija Junction Ćuprija-Paraćin;
- 105 (Belgrade Centre)-S.Pazova-N.Sad-Subotica-State border-(Kelebia);
- 106 Niš-Dimitrovgrad-State border-(Dragoman);
- 107 Belgrade Centre-Pančevo Main St.-Vršac- State border-(Stamora Moravita);
- 108 (Belgrade Centre)-Resnik-Požega-Vrbnica- State border-(Bijelo Polje);
- 109 Lapovo-Kraljevo-Lešak-Kosovo Polje-Djeneral Janković- State border-(Volkovo);



- 110 Subotica-Bogojevo-State border-(Erdut);
- 111 Belgrade Marshalling Yard "A"-Ostružnica-Batajnica;
- 112 Belgrade Marshalling Yard "B"-Ostružnica;
- 113 Belgrade Marshalling Yard "A"-Junction, "B"- Junction "K/K1"-Resnik;
- 114 Ostružnica-Junction "B"-(Junction "K/K1");
- 115 Belgrade Marshalling Yard "B"-Junction "R"- Junction "A"-(Resnik);
- 116 (Belgrade Marshalling Yard "B")-Junction "R"-Rakovica;
- 117 Belgrade Marshalling Yard "A"-Junction "T"-Rakovica;
- 118 Belgrade Marshalling Yard "B"-Junction "T"-(Rakovica);
- 119 Connecting track in the area of Junction "K/K1": (Junction "B")--Points "K"-Points "K1"-(Jajinci);
- 120 (Junction Pančevo Most)-Junction Karadjordjev park-Junction Dedinje-(Junction "G");
- 121 Indjija-Golubinci;
- 122 Novi Sad-Novi Sad Marshalling Yard-Junction Sajlovo;
- 123 By-pass track at the station Mala Krsna: (Kolari)-Junction points 1-Junction points 28-(Osipaonica);
- 124 Junction Lapovo Varoš-Lapovo Marshalling Yard-Lapovo;
- 125 Trupale-Niš Marshalling Yard-Medjurovo;
- 126 Crveni Krst-Niš Marshalling Yard;
- 127 Niš-Junction Most-(Niš Marshalling Yard);
- 128 Connecting track at the station Niš: (Crveni Krst)-Junction points 3-Junction points 4-(Ćele Kula).

Regional lines with associated line number are:

- 201 Subotica-Horgos-State border-(Roszke);
- 202 Pančevo Main St.-Zrenjanin-Kikinda-State Border-(Jimbolia);
- 203 Belgrade Donji Grad (km 7 + 041) Belgrade Danube Junction Pančevo most¹;
- 204 Topčider Passenger Station (km 4 + 195) Junction "G" (Rakovica)²;
- 205 Banatsko Miloševo-Senta-Subotica;
- 206 Pančevo Varoš-Junction "2a"-(Jabuka);
- 207 Novi Sad-Odžaci-Bogojevo;
- 208 (Novi Sad)-Junction Sajlovo-Rimski Šančevi-Orlovat stop;
- 209 Novi Sad Marshalling Yard Junction points 7-Novi Sad Lokoteretna-Sajlovo Junction;
- 210 Orlovat- Junction "1a"-(Lukićevo);
- 211 Ruma-Šabac-Junction Donja Borina-State border-(Zvornik Novi);
- 212 (Platičevo)-Junction "1"-Junction "3"-(Štitar);
- 213 Stalać-Kraljevo-Požega;
- 214 Connecting track at the station Kraljevo: (Mataruška Banja)-Junction points 72-Junction points 73-(Adrani)
- 215 Connecting track at the station Požega: (Uzići)-Junction points 53-Junction points 54-(Dragačevo);
- 216 Smederevo Junction Jezava Radinac Mala Krsna;
- 217 Junction Jezava Smederevo Port;
- 218 Mala Krsna-Bor-Junction "2"-(Vražogrnac);
- 219 (Nis) Crveni krst-Zaječar-Prahovo Port;
- 220 (Rgotina)-Junction "3"-Junction "1"-(Trnavac);
- 221 (Barlovo)-Junction "1"-Kuršumlija;
- 222 Kuršumlija-Kastrat;
- 223 Doljevac-Kastrat-Merdare Kosovo Polje;
- 224 Kosovo Polje-Metohija-Peć;
- 225 Kosovo Polje Freight St.-Junc. "1"-(Drenica);

² By virtue of the Conclusion adopted by the Government of the Republic of Serbia No 340-2989/2022 dated April 7th, 2022, the Decision of the Shareholders' Meeting of Infrastructure of Serbian Railways JSC on termination of public railway service, dismounting and reconstruction of infrastructure capacities on railway line Topčider Putnička (km 4 + 195 – Junction "G" – (Rakovica) has been approved.



_

¹ By virtue of the Conclusion adopted by the Government of the Republic of Serbia No 340-2986/2022 dated April 7th, 2022, the Decision of the Shareholders' Meeting of Infrastructure of Serbian Railways JSC on termination of railway line Belgrade Donji Grad (km 7+041) – Belgrade Danube – Junction Pančevo Most has been approved.

Local lines with associated line number are:

- 301 Subotica-Subotica Factory;
- 302 Subotica-Subotica Hospital;
- 303 Novi Sad (km 1+042)-Novi Sad Ložionica;
- 304 (Podbara)-Junction "3"-Junction "2"-(Kać);
- 305 (Rimski Šančevi)-Junction "1"-Junction "3"-(Podbara);
- 306 Rimski Šančevi-Žabalj;
- 308 (Brasina)-Junction Donja Borina-Zvornik Grad;
- 309 Pančevo Varoš-Pančevo Vojlovica;
- 310 Connecting track at the station Senta: (Čoka)-Junction points 22-Junction points 23-(Orom);
- 311 Markovac-Svilajnac-Despotovac- (Resavica);
- 312 Metohija-Prizren;
- 313 Vršac Bela Crkva.

Shunting lines with associated line number are:

- 401 Vršac-Vršac Vašarište;
- 402 Kikinda-Metanolsko sirćetni kompleks(km 6+413);
- 403 Bogojevo-Dunavska Obala;
- 404 Paraćin-Stari Popovac;
- 405 Surčin-Jakovo-Bečmen;
- 406 Šid-Sr.Rača Nova-State Border-(Bijeljina);
- 407 Ovča-Padinska Skela;
- 408 Sonta Apatin factory;
- 409 Bačka Palanka Gajdobra

Museum-tourist line with its associated number is:

501 Šargan Vitasi – Mokra Gora – State Border (Višegrad).

Due to the technical condition of particular local and shunting lines, traffic is no longer possible on such lines and is currently completely or partially suspended. More details can be found in Appendix 6.

The following IŽS lines belong to main international railway lines according to AGC (European Agreement on Main International Railway Lines):

<u>Direction North – South</u>

E 771 Subotica-Bogojevo

E 79 Belgrade - Vrbnica

E 85 Subotica-Belgrade-Niš-Preševo

-Kraljevo-Djeneral Janković

<u>Direction West - East</u>

E 66 Belgrade-Vršac

E 70 Šid-Belgrade-Niš-Dimitrovgrad

2.3.2 Track Gauges

Track gauge along the network is 1435 mm, except for the museum-tourist line the "Shargan Eight", whose gauge is 760 mm.

2.3.3 Stations and Nodes

Names, km-points and distances in km between particular service points and railway nodes are given in Appendix 6 and Appendix 10.



2.3.4 Loading Gauge

Loading gauge is a limited space viewed as a cross section vertical to the track axis that may not be exceeded by any part of the rail vehicle, whether loaded or empty. The loading gauge registered for all IŽS lines for international traffic is UIC GB, except for parts of the railway lines Valjevo – Kalenić and Grlica - Djeneral Janković, where the registered loading gauge is UIC GA. These loading gauges are in line with the UIC Leaflet 506.

The loading gauge that applies to domestic traffic on IŽS lines is ŽS I. The ŽS I gauge is slightly larger than the UIC GA loading gauge and slightly smaller than UIC GB. The summary of loading gauges is presented in Appendices 3.1.-3.3.

IŽS lines have not been coded for the combined transport gauges in accordance with UIC Leaflet 596-6. However, the measurements that were performed have shown that movements of wagons carrying combined transport load units - such as high cube containers (HCC), semi-trailers and entire road vehicles - are possible. Movements of such consignments are possible under special safety conditions in the exceptional transport regime.

For further information, please contact IŽS:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina St. 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 E-mail: sp@infrazs.rs

2.3.5 Weight Limits

In accordance with UIC Leaflet 700, depending on track capacity to bear loads by vehicles on the railway network, various weight limits are applicable and expressed in tonnes per axle and tonnes per linear metre.

The load by a railway vehicle per linear metre is the load of an unloaded or loaded railway vehicle divided by the length of the railway vehicle expressed in metres and measured between tops of uncompressed buffers.

Axle load of a railway vehicle is the load of an unloaded or loaded railway vehicle divided by the number of axles of the railway vehicle.

Based on the above-stated, railway lines were classified into categories (Regulations on classification of railway lines No. 325, published in the Official Gazette of the Community of Yugoslav Railways (ZJŽ) Nos. 7/89 and 9/90). The classification of IŽS railway lines is shown in Table No. 4.

Table No 4: Categories of admissible loads on IŽS network

A dua! a a!la1 a	landa .		Admissible loads per axle			
Admissible loads per linear metre		per	A	В	С	D
			16 t	18 t	20 t	22,5 t
1	5.0 t/m		A	B1		
2	6.4 t/m			B2	C2	D2
3	7.2 t/m				C3	D3
4	8.0 t/m					D4



The overview of admissible loads in tonnes per axle and in tonnes per linear metre is presented in Appendix 6

2.3.6 Line Gradients

In order to determine required train braked weight, the ruling gradients for braking must be determined for each line or track section. The ruling line gradient for braking means the value of its longitudinal gradient, on the basis of which braked weight percentages are determined, i.e. the required train braked weight on a certain line or track section. The longest longitudinal gradient (rising or falling) on a specific line (or section), over the length of 1000 metres or more, is considered to be the ruling gradient of that specific line or section. In determining the ruling gradient for braking, the curve and tunnel related resistances are not taken into consideration.

The ruling resistance of a line or one of its sections means the value of its specific resistance due to gradient, curve and tunnel, on the basis of which train weight i.e. locomotive hauled load is determined.

The overview of ruling gradients and ruling resistances of particular lines is presented in Appendix 6.

2.3.7 Maximum Line Speeds

The maximum permissible speed with respect to line capacity is the maximum speed permitted on a line or line section with respect to the railway line superstructure and its structures (carrying capacity of the track, its lining and levelling, curve radius, points design, etc.), fixed electric traction installations and signalling and interlocking devices on the line, and it may not exceed the lowest one of such speeds.

Restricted speeds are permanently prescribed speeds that are lower than the maximum permissible speed on the railway line and that are applied on a certain section of the railway line due to its technical condition or that are applied while running in the points area.

For further information on maximum permissible speeds and restricted speeds with respect to line capacity, please refer to Appendix 6.

2.3.8 Maximum Train Lengths

The length of each train is determined during the capacity allocation procedure and it is expressed in rounded metres. The maximum permissible length of a train operating on a line, for the purposes of its smooth acceptance and forming in railway stations, at passing points and other service points, is determined on the basis of the maximum permissible train length in certain stations, passing points and other service points along the given line and with respect to usable length of main lines.

Maximum permissible length of a train for station tracks is obtained by subtracting the length of 25 m to be taken up by the locomotive and spare 10 m to be taken up by the train, from the usable track length expressed in metres and determined under the Instructions (Instructions on the technical standards and data for the preparation of timetable implementation, "Official Gazette of ZJŽ Nos. 9/89, 6/91, 8-9/91, 4/92, and 9/92).

Actual length of a train is obtained by totalling the lengths over uncompressed buffers of all vehicles included in the train, except for the locomotive hauling the train, whose length has been taken into account during determination of maximum permissible train length at a station. If a train has double heading, banking locomotive or intermediate-haul locomotive, their lengths must be taken into account when determining the train length.

The overview of distances between the service points and maximum permissible train lengths relative to usable track lengths is presented in Appendix 6.

The provisions of paragraph 2 of this article shall also apply to the length of the passenger train. The passenger train may be longer than the length of the platforms and arranged areas in service points, and if the



railway undertaking requires their dwelling in such service points, it must set and ensure the necessary safety measures for passengers in accordance with local and/or other specific circumstances. The overview of platforms and arranged areas in service points is given in Appendix 8 and for further details, please contact IŽS:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St. 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs

2.3.9 Power Supply

IŽS ensures the transmission of required electric energy from the public power supply network of the Republic of Serbia via the fixed electric traction installations (substations) and the catenary for electric train traction. All electrified railway lines have the basic power supply system, which is single-phase AC 25 kV 50 Hz system. The overview of electrified railway lines is presented in Appendix 3.4. The overview of power supply installations is presented in Appendix 3.5.

The power supply system voltage is U=25 kV, and its frequency is f=50Hz. The height of the contact wire are Hkpmin=5000 mm, Hkpnom=5500 mm and Hkpmax=6000 mm. The staggering of the OCL is p=±200 mm along the straight track, and p=300 mm in curves.

In the 25kV, 50 Hz power supply system, the use of pantograph (current collector) for electric motive power is permitted according to the General Contact Line Catalogue (type POS-III/E). The design of pantograph is shown in Figure No 1.

The basic parameters for the asymmetric pantograph used on IŽS network, with double contact strip and pneumatic actuator, are in accordance with the provisions of UIC Leaflet 608 and are shown in Table No 5.

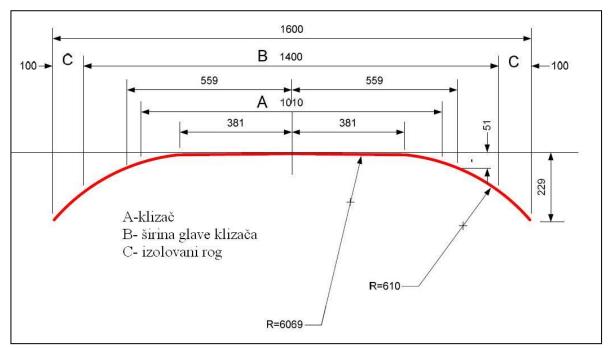


Figure No 1. – Dimensions of pantograph



Table No. 5: Pantograph parameters

Permissible width of horned slipper holder (mm)	Width of metal horns (mm)	Rated current (A)	Height of contact line (mm)	Minimum length of contact strip (mm)	Static force Fa (N	Maximum aerodynamic force Fa (N)	Maximum speed (km/h)	Type of contact strip
1600	1400	400	6200 5500 5000	800	60-90	70	160	graphite

2.3.10 Signalling Systems

Railway signals provide signals by means of which railway staff can mutually communicate in a fast and reliable way about train operation, shunting, permitted and forbidden runnings via a certain location, the track condition, the need for speed restriction, etc. Some signals are used for preserving of personal safety of railway staff and other persons.

Regulations on types of signals, signal markings and track markings ("Official Gazette of the RS" No.50/20) are applicable to the use of signals and signal markings.

There are eleven types of station track interlocking on the network of "Infrastructure of Serbian Railways" JSC, and they are presented in Appendix 6.

On IŽS network, the main arterial routes are equipped with fully centralized electrical relay signalling & interlocking equipment, as follows:

- Belgrade Center-Niš-Preševo: Siemens SpDrS-64/JZ track circuit system,
- (Belgrade Center) Resnik-Vrbnica: Siemens SpDrS-64/JZ axle counter system,
- Stara Pazova Golubinci: Siemens SpDrS-64/JZ track circuit system,
- Golubinci-Ruma: Siemens SpDrS-64/JZ axle counter system,
- Ruma-Šid: Siemens SpDrS-64/JZ track circuit system,

In all stations on Belgrade Center – Stara Pazova – Novi Sad – Subotica line section, new electronic signalling and interlocking devices type "DS6-60" with "MMI" electronic control and monitoring system have been installed. Within the upgrade performed on trackside and station electronic signalling and interlocking devices, all service points on Belgrade Center – Stara Pazova – Novi Sad – Subotica line section have been included in the central traffic control and command system – remote control type "FZt – CTC".

The main arterial routes Šid- Golubinci – (Stara Pazova) – (Belgrade Center)-Niš-Preševo and Belgrade Center- Vrbnica are included in the system of remote traffic control and command – remote control centre (manufactured by Westinghouse). There are three remote control centres - in Belgrade, Požega and Niš. Based on this device, 3 remote control centres were set-up in Belgrade, Niš and Požega with the total of 133 controlled stations.

Dimitrovgrad Station (railway line Niš-Dimitrovgrad-State Border) is equipped with electronic signalling & interlocking device Simis-W with Iltis control & supervision system manufactured by Siemens.

In addition to the above-mentioned, Pančevo Main St. and Čuprija stations are equipped with electronic signalling & interlocking devices.

Other railway lines are equipped with other above stated interlocking types, but there is no continuity as regards to one system of interlocking.

The overview of signalling and interlocking devices is presented in Appendix 3.6.



2.3.11 Traffic Control Systems

The movement of trains running in opposite directions and consecutive train movements are controlled by requesting and giving the permission i.e. announcement of arrival and departure.

Consecutive trains can follow one another only in particular space intervals. For the control of trains following one another in particular space intervals, railway lines can be divided into:

- Block sections between stations when two neighbouring stations control the sequence of trains in the station interspace,
- Train-recording sections when two neighbouring train-recording points or a station and a neighbouring train-recording point control the sequence of trains in announcement intervals,
- Block sections when the traffic of consecutive trains is controlled by automatic positioning of automatic block signals in the position of permitted or forbidden train ride.

In addition to space distance, in case of consecutive trains in train reporting and block intervals, there should be a time interval so as to avoid train stopping before automatic block signals due to different train journey times over block sections (time spacing).

On the railway lines of "Infrastructure of Serbian Railways" JSC there are also interstation interlocking devices (MZ) which regulate train traffic at distances between stations, where an interstation track occupation is reported by means of axle counters.

There can only be one train in one block section on the same track and at the same time.

Train operation is regulated by movements inspectors who uses the station signal boxes and along railway lines through remote control – by the remote control dispatcher from the central signal box, except at the stations that are not included in the remote control system. The traffic of trains running in opposite directions and consecutive trains is regulated by movements inspectors at manned stations and along the railway lines included in the remote control system it is regulated by remote control dispatchers.

"Infrastructure of Serbian Railways" JSC uses "Flexi code 560" remote control system on its territory, manufactured by Westinghouse. It uses semiconductor technology and a code system, and controls instruction completeness at the stages of forwarding and acceptance. It was developed as a standard format and it consists of a remote control centre, which can control 32 stations on one railway line and of one or more lines for data transfer, as well as the remote control equipment at stations (satellites).

Based on this device, 3 remote control centres were constructed in Belgrade, Nis and Pozega, with 140 controlled stations.

On Belgrade Center – Stara Pazova – Novi Sad – Subotica line section, all service points are included in the central traffic control and management system – remote control center type FZt-CTC.

The train control system is governed by the Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22) and Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22).

The train control methodology is presented in Appendix 6.

2.3.12 Communication Systems

In the course of traffic operations, communication is carried out via telecommunication devices – telephone and ground-train radio links. Communication via means that provide reliable and continuous registration of notifications (teleprinter, telephone or radio link with registration devices) is considered to be verifiable communication. The notifications related to the control of train movements (permissions and instructions given to train crew via telephone or ground-train radio links) are furnished exclusively via devices for verifiable communication.



The communication between movements inspectors, remote control centre dispatchers and drivers is carried out in Serbian language.

All notifications are given in the format and manner set forth in the Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22), Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22) and Regulation on records kept by the railway undertaking and the railway infrastructure manager ("Official Gazette of the RS" no.56/19, 154/20 and 159/20).

The overview of telecommunication links and installations is presented in Appendix 3.7.

IŽS network uses analogue ground-train radio system (RDV) for transmission of specially coded voice information in the frequency range of 460 MHz and by using frequencies belonging to quadrifrequency groups according to UIC Leaflet 751-3. The system operates in full duplex (modes A and B), with selective calling option including automatic identification and making special calls (group, intervention).

There is a possibility of integrating into local radio networks (mode C) and automatic telephone exchange. The devices were manufactured by AEG (now EADS telecom) in the '70s and the '90s.

On the lines with a dispatcher control system, the train operating staff is connected with the remote control centre dispatchers via mobile RDV units, which represent mandatory driver's cab equipment.

The GSM-R system enables voice communication and transmission of text messages within the ERTMS, i.e. for ETCS L2 and ETCS L3. The GSM-R system is installed on line section Belgrade Center – Stara Pazova–Novi Sad – Subotica.

2.3.13 Train Control Systems

For the time being, there is no automatic train control system on the railway lines of "Infrastructure of Serbian Railways" JSC.

Intermittent transmission AS device (automatic train control) with resonant frequencies of 1000Hz and 2000Hz, type Indusi (I 60), is used for the control of train movements. It is comprised of:

- track magnet (stationary trackside part of the device)
- transmission system (inductive link between the track magnet and locomotive auto-stop device), and
- locomotive part installed on the traction unit.

Track magnets are installed on the right-hand side of the track, in the direction of train movement.

Functioning and operating of AS devices have been stipulated under the Operator's Manual for inductive I-60 AS devices (Instructions No 425), Instructions for installation, testing and putting into operation and maintenance of the locomotive part of I-60 AS device (Instructions No 426), and Instructions for use, installation, testing and maintenance of trackside AS devices on the lines of Yugoslav Railways (Instructions No 427).

The overview of the lines equipped with AS device is presented in Appendix 3.6.

The ERTMS is the European Rail Traffic Management System. The ETCS is a part of ERTMS. On Belgrade Center – Stara Pazova – Novi Sad – Subotica line section the ETCS L2 is installed.

Functioning of the KMC (Key Management Center) system for the ETCS key management, enabling the railway carriers to use the GSM-R and ETCS, is prescribed in the *Instructions for creating the KMC keys for registering the new devices on the ETCS-2 system*. The instructions, in the format of Infrastructure Manager's act, is provided in Appendix 2.

In accordance with the instructions and aimed at using the GSM-R and ETCS, it is necessary for the railway carrier to submit a Request for issuance of encryption keys for communication in the ETCS system via the



Railway Infrastructure Access Department. The request is submitted in a prescribed format, in line with Appendix 3.6a.

2.4 Traffic Restrictions

2.4.1 Specialised Infrastructure

According to Article 40 of the Law on Railways ("Official Gazette of RS" No 41/18 and 62/23), if there are appropriate alternative routes, the Infrastructure Manager may, upon consulting interested parties, designate the specialised infrastructure for particular types of traffic.

In case that a specialized infrastructure is designated, the Infrastructure Manager may, when allocating the infrastructure capacity, give priority to such type of traffic, however prioritizing may not be in collision with the competition protection rules. Designating of specialized infrastructure will not exclude the use of such infrastructure for other types of traffic when capacities are available.

There is no specialised infrastructure on the network operated by IŽS in the above sense.

2.4.2 Environmental Restrictions

Environmental restrictions, such as noise levels, are not currently applied on the network managed by IŽS.

2.4.3 Dangerous Goods

The transport of dangerous goods on the railway infrastructure operated by IŽS is regulated by international and national regulations in the field of transport of dangerous goods in accordance with 3.4.4 - Dangerous Goods.

On the Niš – Dimitrovgrad – State Border – (Dragoman) railway line, the transport of tank wagons carrying ammonia is prohibited.

Locations for loading, unloading, transshipment of dangerous goods may be performed only in places that meet prescribed requirements. The stations (service points open to the acceptance and forwarding of goods) within the rail infrastructure do not meet this requirement, wherefore handling of dangerous goods in the station areas (service points) is not allowed.

Handling of certain types of dangerous goods () can be performed on special tracks under special conditions, i.e. on particular parts of the tracks in particular stations. The list of service points in which transshipment of dangerous goods can be performed is given in Appendix 3.8.

31

For further details, please contact IŽS:

"Infrastructure of Serbian Railways"
Traffic Department
Central Operational Department
Main Dispatcher for Transport of Dangerous Goods
6 Nemanjina St
11000 Belgrade
Serbia

Tel.: +381 11 3619 288 e-mail: <u>rid1@srbrail.rs</u>.



2.4.4 Tunnel Restrictions

On the railway line Belgrade Centre —Pančevo Main St. - Vršac- State border, through the "Vračar" tunnel i.e. on the section junction Karađorđev park — junction and Pančevo Most stop and through the "connecting" ("vezni") tunnel i.e. on the route Karađorđev park junction - Dedinje junction, the trains with diesel traction vehicles, DMUs, diesel motor track vehicles, as well as vehicles with their own diesel generator set (power supply wagon, reefers with generator set station) cannot be regularly dispatched. Exceptions to this are DMUs series 711 and relief (auxiliary) trains with diesel traction of the infrastructure manager which are urgently dispatched to the accident/incident locations and diesel motor track vehicles used for urgent elimination of obstacles disrupting the traffic, while respecting the limitations that interval of sequence and the time between meeting of any two vehicles with diesel drive cannot be shorter than 30 minutes.

In other cases, the diesel motor vehicles of the infrastructure manager can run on the specified sections when the transport of trains for transport of passengers is not organized in the service point Vukov spomenik.

Along with the obligation to respect the restrictions regarding the vehicle drive, for the transport of freight trains containing wagons with a RID marking (loaded or empty vehicles for transport of dangerous goods), the following conditions apply:

- on the part of railway line Pančevo Most–Rakovica and Pančevo Most Belgrade Centre, trains can operate only in the period when traffic of passenger trains is not organized i.e. when the station is closed for passenger transport,
- on the part of railway line Pančevo Most -Rakovica and Pančevo Most Belgrade Centre, there can be only one train with RID marked wagons i.e. meeting of two freight trains if at least one is composed of RID marked wagons is not permitted;
- during the operation of trains composed of RID marked wagons, an additional technical inspection must be carried out, which includes checking of bearing temperature and enhanced visual control of loads (valve, clamps etc.)for the train which operaters in direction Pančevo Most Rakovica and Pančevo Most Belgrade Centre in Pančevo Main St., and for the trains operating in direction Rakovica –Pančevo Most either in Rakovica station or in Belgrade Marshalling Yard (if it is performed in Belgrade Marshalling Yard, there is no need for the inspection to be performed in Rakovica station);
- obligation of railway undertaking upon performed additional technical inspection of a train in stations Pančevo Main St., Rakovica and Belgrade Marshalling Yard, is to register a clause in the telegraph-telephone log "The additional technical inspection of train No ______ was performed on date ___at___ hours (signature of authorized representative of railway undertaking)", thereby to inform the train dispatcher in a proved way that technical inspection of train was completed before dispatching it on the part of railway line Pančevo Most-Rakovica. In the event that railway undertaking does not have an organized inspection service in stations Pančevo Main St., Rakovica and Belgrade Marshalling Yard, and that technical inspection of trains composed of loaded or empty RID marked wagons has not been performed, such train cannot operate on the part of railway line Pančevo Most -Rakovica.

Freight trains, which have loaded or empty RID marked wagons, must in no case operate in the direction Belgrade Center - Pančevo Most.

2.4.5 Bridge Restrictions

There are no bridge restrictions in terms of specifically defined requirements apart from those arising from the bridge structural parameters. Exceptionally, until the construction of the fifth longitudinal bridge girder into the construction of "Pančevo Most" across Danube river, on the railway line Belgrade Centre – Pančevo Main St. – Vršac – State Border, between location on junction Pančevo Most—Krnjača Most all assemblies of two freight trains are prohibited on "Pančevo Most".

32



2.4.6 Maximum Train Weight Restrictions

The maximum train weight for the trains running on the Niš – Dimitrovgrad – State Border – (Dragoman) is restricted to 1200 tonnes.

2.4.7 Train Traction Restrictions

On the Stara Pazova – Novi Sad – Subotica line section, trains with diesel traction must not be dispatched. The exception from this rule are the trains of railway undertakings performing construction, reconstruction or maintenance of railway infrastructure. In case of trains that, in addition to the train locomotive, also contain the additional work locomotives, i.e. double heading locomotives, such locomotives must run within the train composition along the entire Batajnica – Novi Sad – Subotica line section. Inclusion i.e. removal of the double heading locomotive from the train composition is allowed only in Novi Sad Marshalling Yard, if planned according to the Timetable documents.

2.4.8 Train Speed Restrictions

On the Batajnica – Stara Pazova – Novi Sad – Subotica line section, the speed of freight trains is 90 km/h. The exception from this rule are the trains of railway undertakings performing construction, reconstruction or maintenance of railway infrastructure. Trains operating between Batajnica and Stara Pazova, on the routes to/from Šid, do not have this speed restriction.

2.5 Availability of the Infrastructure

All railway lines operated by IŽS are open to railway traffic from 0.00 h to 24.00, except for the lines on which the traffic due to technical condition is temporary impossible/ or with the Decision of the Government of the Republic of Serbia the consent for the suspension of public transport of passengers and goods on the part on the railway infrastructure was given ("Official Gazette of the RS"no.80/2016), and they are listed in Appendix 6. Service points are open for railway traffic permanently, as some of them may have limited operating hours envisaged for the effective staff of the traffic service, as stated in Appendix 6. Details about mentioned working time are published in the timetable material, and for more datils please contact:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina Street, 11 000 Belgrade, Serbia Tel/Fax: +381 11 3618 214

E mail: sektor.sp@infrazs.

Exceptionally, on the railway lines with limited hours of operation where mentioned staff is working in limited operating hours, train operations can take place outside the mentioned hours when trains have to operate via auxiliary routes due to the occurrence of an accident or incident. Appendix 3.9 contains an overview of auxiliary routes that may be used as alternative to regular ones. Certain lines that may be used as auxiliary routes can be of different class from the line class along the regular routes with respect to permitted loads per axle or m'.

A railway operator may also submit a request for train path allocation outside the operating hours of the line or railway service points, in which case such railway operator has to bear all the costs of entire traffic organization for longer operating hours of the line, i.e. service points.

If several railway operators are using longer operating hours, they will jointly bear the costs.

Infrastructure Manager is responsible for maintenance, overhaul and modernization of the infrastructure in order to provide appropriate service and safe performance of transport operations. In this respect, IŽS plans regular maintenance of the lines that affect the availability of infrastructure, in the sense of closure of specific line sections for a specific time period or introduction of temporary train speed restrictions.



The infrastructure use restrictions required for regular infrastructure maintenance are part of the capacity allocation process and are published within the timetable documents, in the timetable booklets (KRVs).

IŽS will issue for all railway operators a 3-months' prior notice of any planned longer works to be performed on the railway infrastructure and which could affect the transport operations and the timetable due to the speed restrictions, route changes, use of buses instead of trains for the carriage of passengers, etc.

For all freight trains running in the South-North and transit the part of railway infrastructure between station Velika Plana and node Belgrade, regular routing is across the railway line (Belgrade)-Rakovica-Jajinci-M. Krsna-V. Plana and the compiling of paths in done in this way. Exceptionally this rule cannot be applied during the planned works on reconstruction of above-mentioned railway line.

For all freight trains running in the south-north and transit the part of railway infrastructure between node Belgrade and station Velika Plana, regularly routing is across the railway line (Belgrade)-Resnik-Mladenovac-V. Plana and the compiling of paths in done in this way.

The railway lines on the territory of Kosovo and Metohija are under interim supervision of UNMIK, according to the Temporary Agreement between ZTP Beograd and UNMIK Railways of 31/05/2002 (ref. number 300/2002 - 153 of 31/05/2002), wherefore the path allocation requests for this territory will not be taken into consideration.

2.6 Infrastructure Development

Railway infrastructure, which is managed by IŽS, is constantly being renewed and modernized, in order to enable to the users the best possible service quality.

Development projects of the infrastructure are defined within Strategic plan of IŽS (Decision of the Assembly of Joint stock company for public railway infrastructure management "Infrastructure of Serbian Railways" JSC, Belgrade no. 5/2017-116-49 from June 29, 2017)", which is prepared on the base of the National program of the infrastructure ("The Official Gazette of RS", no. 53/17). Development of the railway infrastructure is directed towards the modernization of the lines which are part of the Pan-European corridor.

Possibility of the realization of the planned works depend upon the amount of the financial means, which are provided from the state budget of the Republic of Serbia and from the amount provided from the other sources of financing.

Appendix 3.11. contains a list of development projects.



34

3. ACCESS CONDITIONS

3.1 Introduction

This chapter of the Network Statement describes the conditions associated with access to the railway infrastructure managed by the IŽS. These conditions also apply to the part of freight corridors passing through the railway infrastructure managed by the IŽS.

3.2 General Access Requirements

A railway undertaking can provide transport services on IŽS railway infrastructure based on:

- valid license for carriage in railway transport over the infrastructure, issued by Directorate for Railways (hereinafter: DR),
- valid certificate on safety for carriage in railway transport,
- allocated capacity path and contract on provision of access to and use of public railway infrastructure concluded with the infrastructure manager.

Requirements for the submission of application for license, safety certificate and thereof contents are stipulated in the Law on Railways ("Official Gazette of RS" No 41/18 and 62/23), Law on Safety in Railway Traffic ("Official Gazette of RS" No 41/18), Rules on transport licenses in railway traffic ("Official Gazette of RS" No 53/19), Rules on joint safety methods for evaluation of compliance with the requirements for obtaining of safety certificates and safety management system elements ("Official Gazette of RS" No 32/21) and Rules on transport safety certificate forms ("Official Gazette of RS" No 63/19).

3.2.1 Conditions for Applying for Capacity

Request for train path allocation can be submitted by a railway undertaking or an international group of railway undertakings or other persons or legal entities, such as competent authorities, consignors and forwarding agents and operators in combined transport, having interest in provision of public service or having commercial interest in the allocation of railway infrastructure capacity.

Where a train path is allocated to an applicant other than a railway undertaking, the contract on the use of railway infrastructure shall be concluded between the infrastructure manager and the railway undertaking hired by such applicant.

If a request has been submitted after a specified deadline, train path in accordance with remaining capacities will be offered to the applicant, and if there are no capacity constraints, a new path will be subsequently created.

3.2.2 Conditions for Access to the Railway Infrastructure

Services of carriage in railway transport may be provided by a company, other legal entity or entrepreneur registered for provision of public transport services or transport for own purposes, incorporated in the Republic of Serbia, subject to the submission of evidence of fulfilment of the conditions related to good reputation, financial capability, and competence, and the cover for civil liability.

The license for carriage in railway transport and the certificate on safety is issued by DR or a competent authority of another country, based on reciprocity, with which country Serbia has signed an intergovernmental agreement on mutual recognition of certification.

Transport on railway infrastructure may be performed by railway undertakings meeting the requirements referred to in paragraph 1 hereof, who signed the Contract for use of public railway infrastructure. The Contract for use of public railway infrastructure regulates the mutual rights and obligations between the infrastructure manager and railway undertakings and they are concluded in line with article 19 of the Law on Railways.



3.2.3 Licenses

Directorate for railways issue transport license: for transport of goods/passengers and for transport for own purposes.

Transport License is issued to applicant, company, other legal entity whose main registered activity is for provision of railway transport of good and/or passengers, or to a company or other legal entity who performs or will perform transport for own purposes, incorporated in the Republic of Serbia, subject to the submission of evidence of fulfilment of the conditions related to:

- a) good reputation,
- b) financial capability,
- c) proficiency and
- d) cover for civil liability in line with the Law on Railways.

Details related to licensing of railway undertakings are set from article 81.to article 85. of the Law on Railways.

Contact of competent institution for issuance of license is:

Directorate for Railways 6 Nemanina St., 11000 Belgrade The Republic of Serbia Manager's Office tel. (011) 361 68 66 fax (011) 361 83 46 e-mail: kontakt@raildir.gov.rs

web page: www.raildir.gov.rs

3.2.4 Safety Certificate

The railway undertaking must have safety certificate for transport to be allowed to access infrastructure. The type and scope of operations of railway undertaking related to certificate are specified in the safety certificate.

The safety certificate may include the entire network or certain part thereof.

Safety certificate is consisting of:

- 1) part A confirming the acceptance of railway security management system of railway undertaking;
- 2) part B confirming the acceptance of provisions adopted by railway undertaking in order to meet the specific requirement set for transport safety on appropriate network; these requirement may include the application of technical specification, the national safety regulation and internal regulation of railway undertaking, the acceptance of employee's certificates and permissions for usage of rolling stock used by that railway undertaking.

Directorate for Railways is responsible for issuance of safety certificate for transport in set form and in the form of decision. The decision to issue or to refuse to issue safety certificate for transport is ultimately in the administrative procedure and a dispute can be brought against it at Administrative Court.

The validity period of the safety certificate for transport is five years and can be renewed at the request of the holder.

Directorate for Railways determine in more detail forms of safety certificate for transport, numbering of forms of safety certificate for transport in line with European identification number, the application form for



issuance of safety certificate for transport and instructions for its completion, as well as necessary documentation enclosed with the request for issuance of safety certificate for transport.

Provisions regarding safety certificate for transport are set in Law on Railway Transport Safety.

Contact of competent institution for issuing safety certificate is:

Directorate for Railways 6 Nemanjina St., 11000 Belgrade The Republic of Serbian Manager's Office tel. (011) 361 68 66 fax (011) 361 83 46 e-mail: kontakt@raildir.gov.rs

web page: www.raildir.gov.rs

3.2.5 Coverage for Civil Liability (Insurance)

One of the conditions for issuing a transport license is the fulfillment of the requirements related to civil liability coverage (Insurance).

The requirement relating to civil liability coverage for a company or other legal entity that is registered for the public transport of goods and / or passengers, or performs or will carry out transport for its own purposes, is fulfilled if it is adequately insured or has adequate guarantees under market conditions for coverage, in accordance with legal requirements and confirmed international treaties, for their liability in the event of an accident.

Civil liability coverage may not be required to take effect before the railway undertaking starts operating the service.

3.3 Contractual Arrangements

3.3.1 Framework Agreement

The Infrastructure Manager and an applicant may, by way of exception, draw up a framework agreement on the use of capacity on the relevant railway infrastructure for a period longer than the period of validity of the timetable.

The Framework Agreement between the infrastructure manager and the applicant shall contain the characteristics of the infrastructure capacity for which the applicant applied and which he was offered for a time period exceeding the period of validity of one timetable.

The Regulation on the Manner of Conclusion and Content of Framework Agreements for Allocation of Railway Infrastructure Capacity lays down the procedures, content and criteria relating to the framework agreements for the allocation of railway infrastructure capacity, as well as the obligations of the infrastructure manager regarding information regarding the framework capacity.

At present, the infrastructure manager does not offer the possibility of concluding a framework agreement with the applicant. However, it intensively conducts the activities aimed at defining the procedures so as to have this option open in the near future.

3.3.2 Contracts with RUs

The Law on Railway of the Republic of Serbia stipulates the obligation of concluding a contract on the use of infrastructure that allows railway undertakings to use railway infrastructure. Contracts for use of public



railway infrastructure regulate in more detail the mutual rights and obligations of infrastructure managers and railway undertakings related to guaranteeing the technical and other conditions for safe transport operation, the application of regulations governing the transport of dangerous goods, as well as payment of access charges and charges of services. Contracts for use of public railway infrastructure are concluded under non-discriminatory and transparent conditions.

Contracts on the use of infrastructure are concluded no later than 1 (one) month prior new timetable enter into force or immediately after the allocation of ad hoc train path.

If during the validity period of Contract for use of public railway infrastructure, the railway undertaking through an authorized person submit ad hoc request in approved way for allocation of train path, it is considered that addendum of that contract is concluded at the moment of allocation of requested train path by infrastructure manager.

For other services (basic, additional and accompanying) provided by infrastructure manager special contracts are concluded.

3.4 Specific Access Requirements

3.4.1 Rolling Stock Acceptance

Railway undertaking may use only the rolling stock that complies with the technical regulations and standards. Rolling stock shall, by virtue of their structure and technical condition, ensure safety of transport on the infrastructure, safety of transported persons and goods, safety of staff, and shall meet the health and environment protection requirements.

All requirements relating to rolling stock and thereof use on the railway infrastructure of IŽS are set forth in the Law on Railway Safety and Interoperability ("Official Gazette of the RS", no. 41/18) and Law on Railway Traffic Safety ("Official Gazette of the RS",no.41/18). Railway undertaking shall be responsible for the technical condition, maintenance and operation of the rolling stock.

3.4.2 Staff Acceptance

Railway undertaking shall be responsible for ensuring that his staff meets the requirements stipulated by the Law on Railway Safety ("Official Gazette of the RS", No. 41/8) and applicable by-laws.

The railway undertaking's train manning shall be familiar with the official language in the Republic of Serbia.

Railway undertaking shall be responsible for staff training, validity of periodical knowledge tests, knowledge of track condition and local conditions at stations/stops. Railway undertaking is obliged in that respect to abide by the applicable legislation of the Republic of Serbia.

3.4.3 Exceptional Transport

A load shall be considered special if due to its external dimensions, weight or properties, and with respect to the station installations or wagons in transport by one of the railways participating in transport, it causes particular difficulties, wherefore it is received for transport only under special technical or operating conditions. Carriage of special loads in domestic and international railway transport, as well as the conditions under which such carriage may take place, shall be approved by the Infrastructure Manager whose railway infrastructure will be used for transport. IŽS provides the special loads service (for vehicles or goods) in accordance with the provisions on transport of special loads set forth in the Rules on Transport of Special Loads ("Official Gazette of the RS", no. 6/17).

IŽS shall be responsible for the allocation of capacity and defining the conditions for transport of special loads.



In addition to what was stated above, the railway undertaking in international transport shall comply with the provisions of UIC 502.1 and 502.2, governing the process of approval of requests for transport of special loads. The railway undertaking shall submit a request for transport of loads to the relevant department of IŽS. Special loads will be accepted for transport only if special operating and technical conditions are met. For more details on transport of special loads please refer to Chapters 4 and 5 of this Network Statement.

For more details on transport of special loads please contact:

Infrastructure of Serbian Railways"JSC Traffic Department 6 Nemanjina Street 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 36<u>16 814</u> <u>sektor.sp@</u>srbrail.rs

3.4.4 Transport of Dangerous Goods

Transport of dangerous goods by rail in the Republic of Serbia shall be performed in accordance with: Annex C to Convention concerning international carriage by rail (-COTIF) - Regulations governing the international carriage of dangerous goods by rail (RID); the Law on the Transport of Dangerous Goods; the by-laws based on LTDG and other regulations in the Republic of Serbia.

The Ministry of Construction, Transport and Infrastructure is responsible for performance of administrative, inspection, technical and other expert activities in the field of transport of dangerous goods in the Republic of Serbia(www.utot.gov.rs).



4. CAPACITY ALLOCATION

4.1 Introduction

Pursuant to the Law on Railways and Decision of the Government of the Republic of Serbia on incorporation of Joint Stock Company for Public Railway Infrastructure Management and the Company's Articles of Incorporation, "Infrastructure of Serbian Railways" JSC performs the activities of public railway infrastructure management and is responsible for allocation of infrastructure capacities for the purposes of international and domestic transport in a transparent and non-discriminatory manner, provided that all legal provisions on the conditions for access and use of railway infrastructure set out in Chapter 3 of this Network Statement have been previously fulfilled.

4.2. Description of infrastructure capacity allocation procedure

The Infrastructure Manager normally allocates the train paths once a year, upon reconciling the train path allocation requests in the timetabling process, not exceeding the Timetable validity period.

Allocation of infrastructure capacities in the form of a train path is carried out in accordance with the procedures specified in this document for:

- infrastructure capacities allocation procedure for the new Timetable,
- infrastructure capacities allocation procedure during Timetable validity period (including train path allocation on ad hoc request).

A Railway Undertaking may not assign the allocated train path to another Railway Undertaking. Train path trading is prohibited. Train path user will pay a charge for the use of railway infrastructure and for railway traffic organization and control.

The Government of the Republic of Serbia sets out the Methodology for valuation of elements for determining the charges for the use of railway infrastructure. The Decree on methodology for valuation of elements for determining the charges for the use of railway infrastructure is published in the "Official Gazette" of RS" No 122/14. For additional services, a train path user will pay a charge in accordance with the Infrastructure Manager's formal decision.

How to apply?

Request for infrastructure capacity allocation can be submitted by railway undertakings using the train path request form, which is available in Appendix 4.1, and published on IŽS we<u>bsite: www.infrazs.rs</u>.

When submitting the request, the RU is obliged to submit the following technical data for each traction vehicle series: series, description (axle layout), length (mm), weight (t), maximum speed (Vmax), inertia factor, resistance formula (coefficients a, b and c), traction diagram and braking diagram (tabular and graph presentation), traction type (diesel or electric), as per template provided in Appendix 4.1.b. The requested data are input data for capacity allocation, i.e. for software based timetabling. The data are submitted once for each traction vehicle as well as in case of change of data. If within the same series there are traction vehicles with different technical properties ("subseries") the data need to be provided for each "subseries".

Requests are submitted according to procedures defined under section 4.5.

The request should contain the following data:

- Full registered name of the Railway Undertaking (TIN, company identification number),
- Train type (for passenger transport, freight, empty, locomotive, and similar),
- The desired time of train departure from the departure station and the time of train arrival to the terminal station,
- Traffic route and transport route,



- Necessary stops with minimum lengths of delays,
- Traffic period and days (traffic calendar),
- Series and number of wagons/series and number of train units,
- Train length and mass (length in meters, mass in tons),
- Type and serial number of the traction vehicle (traction passport),
- Additional locomotives (type and serial number) and on which section,
- Maximum train speed,
- Braking type,
- Special notes, such as vehicle shunting, change in train composition, implementation of connections, crew change, type of intermodal transport unit, type of dangerous goods (UN number, number for marking of danger or, for Class 1 dangerous goods, the subclass and compatibility group for substances and items, NHM code with minimum 6 digits and the name of dangerous goods based on RID), exceptional consignments, handover procedures on border crossings, technical hold ups (inspection, water supply, removing of waste and similar) and the required time period, the need for additional track capacities (storing, preheating/cooling, train formation and similar), the need for access to other facilities for provision of additional services and similar.

Upon the request of IŽS, a Railway Undertaking will be required to provide all the missing data within five working days, otherwise the request for capacity allocation will not be considered as submitted.

A request for capacity allocation submitted to IŽS on time and containing all the necessary elements makes a basis for timetabling and train path allocation. If a Railway Undertaking changes the request completely or partially after the determined deadlines for request submission it assumes the risk of not having the request granted.

After the annual timetable drafting process has been completed, the remaining available capacities will be allocated according to the deadlines defined in Appendix 4.3 according to the sequence of request submission.

Manner of capacity allocation

IŽS decides on capacity allocation taking into account all legally valid requests and legal provisions in force. In accordance with the Law on Railways, the procedures and deadlines in capacity allocation have been determined under point 4.5 of the present Network Statement.

Defining of procedures and deadlines in capacity allocation is harmonized with Directive 2012/34/EU and its appendices, as well as the RNE recommendations from "Procedures for International Path Requests".

Relevant bodies involved in the capacity allocation process and their responsibility

Bodies participating in capacity allocation process:

- IŽS "Infrastructure of Serbian Railways" JSC as Infrastructure Manager and capacity allocation body
- Railway Undertakings railway undertakings submitting capacity allocation requests
- RNE RailNetEurope body coordinating the allocation of international train paths and determining processes and deadlines for submission of international train path requests
- FTE ForumTrainEurope European organization of railway undertakings representing the European Forum for technical planning of international passenger and freight transport.

IŽS, as Infrastructure Manager and capacity allocation body, is a member of RNE and is actively involved in the activities of FTE.



4.3 Allocation of capacity for maintenance, including the allocation process

Allocation of infrastructure capacities for maintenance, renewal and modernization of railway infrastructure is an integral part of capacity allocation process. Aiming at maintaining a certain level of quality, safety and reliability of railway infrastructure, IŽS — Department for access to railway infrastructure will, during the timetabling process, reserve a part of infrastructure capacities for scheduled railway infrastructure maintenance, for specific time periods and specific line sections.

Periods reserved for scheduled railway infrastructure maintenance are published in the Timetable Booklet.

4.4. Impact of Framework Agreements

"Infrastructure of Serbian Railways" is currently not concluding framework agreements with interested applicants for allocation of infrastructure capacities.

4.5 Schedule for Path Requests and Allocation Process

Each year IŽS prepares a schedule for path request submission and capacity allocation which is applied in the annual timetabling process and in the capacity allocation process outside the annual timetabling process published in the Network Statement.

Railway Undertakings allocation requests for the new Timetable and during Timetable validity period should be submitted in the form defined in Appendix 4.1, to the following address:

By mail, to the following address:
"Infrastructure of Serbian Railways" JSC
Department for access to railway infrastructure
6, Nemanjina St
11000 Belgrade, Serbia
By e-mail: sektor.pzi@srbrail.rs

4.5.1 Schedule of requests submission for new annual timetabling process

The Applicant submits a request for capacity allocation not earlier than 12 months and not later than 10 months before the new Timetable enters into force. Deadlines for requests submission regarding Timetable 2024/2025 which enters into force on December 15th,2024 with validity until December 13th 2025 are presented in Appendix 4.3.

For the needs of Railway Undertakings wishing to use additional capacities or to change parametres of already allocated train paths, the new capacity allocation during Timetable validity period is enabled by:

- Regular amendments of and supplements to the Timetable
- Special amendments of and supplements to the Timetable
- Train path allocation on ad hoc request

In the form defined by Articles 4.5.2 and 4.5.3 in this Network Statement.

4.5.2 Schedule of requests submission for train path allocation during annual Timetable validity period through regular and special amendments of and supplements to the Timetable

During the Timetable validity period, there are regular amendments of and supplements to the Timetable 5 times a year, in accordance with internationally determined terms which are presented in Appendix 4.4. Deadlines for submission of requests for capacity allocation are presented in the column 1, Appendix 4.4.

Requests for regular amendments of and supplements to the Timetable that are submitted after deadlines specified in the column 1, Appendix 4.4, will be considered as special requests and shall be included in



regular amendments of and supplements to only in case of existence of available infrastructure capacities and technical possibilities for their processing.

After the 5th regular amendments of and supplements to the 2024/2025 Timetable enter into force it will be only possible to submit ad hoc requests for capacity allocation.

Besides regular amendments of and supplements to the Timetable in accordance to the terms specified in the column 3, Appendix 4.4, Railway Undertakings may submit special request for infrastructure capacity allocation outside specified terms. If there is possibility for allocation of the requested capacities, consequent changes in the Timetable shall be considered as special amendments of and supplements to the Timetable.

4.5.3 Allocation of capacities during annual Timetable validity period on ad hoc request

Ad hoc requests for infrastructure capacity allocation are requests for allocation of single train path, which are submitted during annual Timetable validity period.

Infrastructure Manager is obliged to respond to ad hoc requests as soon as possible and not later than five working days upon receiving the request.

4.5.4 Path Allocation and Coordination Process

IŽS will allocate the infrastructure capacity if the applicant fulfils the conditions for capacity allocation set out in the Network Statement and if the infrastructure capacity allows such allocation. IŽS will act in such a manner so as not to favour any applicant.

The following criteria will be applied in the path allocation process:

- Volume of service;
- Utilization of railway infrastructure;
- Volume of additional services provided by the IM in connection with the transport provided on the path;
- Business reputation;
- Public service obligation; and
- Quality of performed transport service in the previous period.

After the final deadline for submission of requests for the annual timetabling has expired, IŽS will initiate the capacity allocation process in a transparent and non-discriminatory manner.

Requests for capacity allocation received after the annual timetable drafting cannot affect draft alteration, except with the consent of the Railway Undertaking to whom the capacity has been originally allocated.

Allocated capacity can be used upon conclusion of Access Contract between IŽS and the Railway Undertaking submitting a request for capacity allocation.

Allocated capacity cannot be transferred onto another Railway Undertaking in accordance with the Law on Railways.

Coordination process

Every year at the beginning of the new annual timetabling process, IŽS will conduct consultations with railway undertakings on their plans for the timetable which will come into force in not less than 11 months (x-11). In the course of these consultations, IŽS will inform railway undertakings on major maintenance works, overhaul and modernization of railway infrastructure.

The coordination process is run by IŽS – Department for access to railway infrastructure, which is preparing and publishing the annual Timetable and preparing of all required working materials.



Upon the expiry of the final deadline for submission of requests for capacity allocation for the annual Timetable, IŽS – Department for access to railway infrastructure will start the coordination process, together with railway undertakings for the purposes of solving conflicting requests and their better harmonization, aiming to fulfil the needs of users as much as possible in a non-discriminatory and transparent way.

Timetable planning includes reviewing all received requests, including all restrictions imposed by IŽS and the scheduled infrastructure maintenance plans.

If the number of requests for allocation of the same infrastructure capacity exceeds the permitted capacity of the particular railway line, IŽS apply priority rules from 4.6.

Following the completion of the coordination procedure, IŽS will deliver the draft timetable to railway undertakings. Together with railway undertakings IŽS will perform the final consultations concerning the draft timetable. Railway undertakings must state, in written form, whether they accept, partially or completely, that is, do not accept, the Timetable.

Deadline for making the statement is one month from the day of the draft submission, at the latest.

After the expiry of the deadline for making the statement, IŽS will define the Timetable according to the requests submitted on time and it will be deemed that the train paths have been allocated.

IŽS will subsequently allocate the remaining available capacities according to requests received after the final deadline, in the order of their receipt.

4.5.5 Dispute Resolution Process

IŽS will initiate the dispute resolution process upon delivery of written complaints by railway undertakings, relating to complete or partial acceptance/non-acceptance of the proposed Timetable.

Complaints are to be addressed to IŽS:

By mail, to the following address:
"Infrastructure of Serbian Railways" JSC
Department for access to railway infrastructure
6, Nemanjina St
11000 Belgrade, Serbia
By e-mail: sektor.pzi@srbrail.rs

IŽS will evaluate all complaints and objections and conduct consultations with railway undertakings aiming to fulfil their requests.

If a mutual solution is not found, IŽS will determine the capacity and inform the railway undertakings of this. If after the request coordination it is still not possible to satisfy all the requests for capacity allocation, IŽS will be obliged to announce that the said line section is congested.

Railway undertakings can appeal to the Directorate for Railways with respect to IŽS decision.

A potential appeal of a Railway Undertaking cannot be the reason to delay the process of Timetable adoption and coming into force.

4.6 Congested Infrastructure

If in the coordination process IŽS is unable to adequately satisfy all railway undertaking requests due to capacity limitations, IŽS will declare the requested infrastructure capacity to be "congested".



In cases when IŽS declares infrastructure "congested", it will conduct an analysis of capacities on congested infrastructure and define limitations due to which it was not possible to satisfy capacity allocation requests as well as propose a plan to enhance the particular capacity.

Infrastructure capacity will not be considered congested if the infrastructure capacity cannot be allocated due to the execution of works on the infrastructure maintenance, modernization, construction and reconstruction.

If the number of requests for allocation of the same infrastructure capacity exceeds the permitted capacity of a specific railway line, and if congested infrastructure is declared regarding that line, i.e. the part of that line, IŽS will, in an effort to allocate the train paths, apply priority rules according to the following order:

- 1) passenger trains in international traffic
- 2) passenger trains in domestic traffic
- 3) international freight trains
- 4) other freight trains

Considering the above mentioned priorities, the train path allocation process will be carried out according to the following rules:

- Requests for train paths of regular trains have the priority over the requests for train paths of special trains and trains transporting exceptional consignments;
- Requests for train paths according to framework agreements have the priority over new requests;
- Requests for train paths for a longer time period of service have the priority over requests for train paths for a shorter time period;
- Requests for train paths for a longer route have the priority over train paths for a shorter route.

If a Railway Undertaking considers that its rights were withheld, it can appeal to the Directorate for Railways.

4.7. Exceptional Transports and Dangerous Goods

Exceptional Transports

Transport of exceptional consignments is transport in the course of which there is a deviation from at least one technical standard applied on the given infrastructure, such as for example, axle load, railway vehicle gauge, loading gauge and similar. Taking into account all the elements required for the transport of an exceptional consignment, IŽS will decide whether the requested infrastructure capacity will be allocated and under what conditions.

Deadline for submission of request for transport of exceptional consignments is not later than 20 days in domestic and 30 days in international traffic prior to service provision. Decision on the request for transport of exceptional consignments shall be made as soon as possible and not later than 15 days upon submission of the request.

Detailed information can be obtained at the below address. Deadline for capacity allocation will be as soon as possible. IŽS will decide whether it is possible to accept a certain transport and under which conditions.

Requests are submitted to:

"Infrastructure of Serbian Railways" JSC Traffic Department 6, Nemanjina St 11000 Belgrade, Serbia Tel.: +381 11 3618 214

Fax: +381 11 3616 814 E-mail: sektor.sp@srbrail.rs



In their request for capacity allocation, railway undertakings are required to list all the necessary information on the exceptional consignment which is being transported, regardless of whether it is a capacity allocation process for the annual Timetable or an ad hoc capacity allocation.

Dangerous Goods Transport

Dangerous goods transport on railway infrastructure operated by IŽS is regulated by international and national regulations in the field of dangerous goods transport, in accordance with point 3.4.4 of the Network Statement.

Based on clauses 1.4.2.2.5 and 1.4.3.6 of *RID* and Article 23, para 4, item 2) and Article 29 para 2 of the Law on Transport of Dangerous Goods, a Railway Undertaking is obliged to report every consignment of dangerous goods to railway Infrastructure Manager.

Reporting of dangerous goods transport can be done by phone: +381 11 3618 288 and in writing to the below address. The below address can be also used for more detailed information:

"Infrastructure of Serbian Railways" JSC 6, Nemanjina St, 11000 Belgrade Central Operations Unit Main dispatcher for dangerous goods transport Tel.: +381 11 3618 288

E-mail: rid1@srbrail.rs; glavni.riddisp@srbrail.rs

For the purposes of safe transport of dangerous goods on IŽS network, a Railway Undertaking is obliged to:

- Report each transport of dangerous goods consignment in real time i.e. immediately before the commencement of transport or at acceptance from the successive carrier.
- Report completion of transport of dangerous goods consignment in real time i.e. at the moment of completion of transport after the completed handover of consignment to the consignee at the destination station or upon handover of consignment to successive carrier.

Railway Undertakings are responsible for obtaining appropriate consents regarding the safety of dangerous goods transport.

Pursuant to clauses 1.4.2.3.1 of *RID* and Article 24 para 2 item 1) of the Law on Transport of Dangerous Goods, the consignee of dangerous goods in railway transport is obliged not to postpone the acceptance of dangerous goods consignment which is resulting in the railway undertaking's obligation not to postpone the handover of dangerous goods consignment after having performed the transport service.

Railway Undertaking is obliged to, after having accepted the dangerous goods consignment for transport at the forwarding station, immediately start the process of transporting the said consignment without any additional delays at the station, except for traffic reasons, accident or incident etc. Phased collecting of wagons loaded with dangerous goods (and non-cleaned empty wagons which were previously loaded with dangerous goods) in the forwarding station for the purposes of subsequent dispatching is prohibited due to the safety in transport of dangerous goods. The process of transport of dangerous goods (acceptance of consignment for transport from the consignor, dispatching, transport and handover of consignment to the consignee) must be performed in accordance with the technologically specified time in order to avoid the potential safety risks in transport.

After the customs clearing of consignment, it is exceptionally permitted for the consignment to remain on station sidings but only for a time period which is necessary to organize the dispatching and continuing of planned transport route, or handover to the consignee in accordance with the specified technological process for station operation i.e. Station Regulations, Part II.



Obligation to announce the transport of dangerous goods Class 1 and Class 7

Exceptionally in transport of dangerous goods Class 1 and Class 7, a Railway Undertaking is obliged to submit to the Infrastructure Manager, in writing (Central Operational Unit – Main dispatcher for transport of dangerous goods) an announcement for the said transport in the time period which is not less than 24 hours prior to the moment of acceptance for transport (entry onto IŽS network). Railway Undertaking may send the announcement of transport also in the form of an email with scanned documents to the following address: rid1@srbrail.rs.

The announcement should contain the following data and attachments:

- 1. Consignor
- 2. Forwarding station and country
- 3. Consignee
- 4. Destination station and country
- 5. Entry border station
- 6. Exit border station
- 7. Net quantity of dangerous goods and wagon number in the train loaded with dangerous goods
- 8. Name of goods (official name of the goods)
- 9. UN number, number for marking of danger (all, if there are several)
- 10. Data on persons hired according to the Decision of the Ministry of the Interior of the Republic of Serbia in the capacity of armed company (first and last name, ID document number, etc., from the Decision issued by the Ministry of the Interior of RS)
- 11. Buffer wagon
- 12. Number of the decision on transport and name of issuing state authority.

The announcement should also contain two appendices:

- Photocopy of the Decision on transport issued by a relevant state authority, and
- For Class 1 dangerous goods: Instructions on special safety measures (MSDS lists) from the manufacturer of Class 1 dangerous goods;
- For Class 7: instructions on measures that the Railway Undertaking should take in transport, restrictions and required data on planned transport route as well as measures in case of danger that are adequate in relation to the consignment in accordance with RID 5.4.1.2.5.2.

Permit for transport of Class 1 dangerous goods is issued by the ministry responsible for the interior affairs, and permit for transport of Class 7 dangerous goods is issued by the authority responsible for protection against ionizing radiation and nuclear safety in the Republic of Serbia (Article 7 of the Law on Transport of Dangerous Goods). The announcement of transport should also contain the basic data on the Railway Undertaking and the transport organizer if case of irregularities or emergency events in transport of dangerous goods. In terms of data it is mandatory to specify the first name, last name and mobile phone number of the person (employed with the Railway Undertaking and/or transport organizer) who is always available during the transport.

4.8 Rules After Path Allocation

4.8.1 Non-usage of allocated train path

In cases when a Railway Undertaking is not using the allocated train path envisaged by the Timetable, IŽS will, depending upon the non-usage percentage, charge the reservation of train path, that is, IŽS will cancel the allocated train path.

IŽS is monitoring the realization of allocated train paths, in such a way that IŽS is calculating the train path utilization degree for all the allocated train paths.

The utilization degree is calculated by dividing the realized train path number of one train with the allocated train path number of the same train, and the result is shown in percentages.



The degree of utilization of allocated train paths is calculated monthly, for the calendar month.

IŽS reserves the right to cancel the allocated train path if a train path is utilized less than 25% of the monthly quota, that is, less than 50% of the monthly quota in case of congested infrastructure.

For the allocated train paths where the degree of utilization is less than the borderline degree of utilization, IŽS will charge the non-usage of the capacity.

The borderline degree of utilization, according to the type of the trains, is given in the below table 6.

Table No 6. Borderline degree of utilization

Train type	Borderline degree of utilization [%]	
Passenger trains	80	
Freight trains	40	
Facultative trains	10	

Facultative train is a train which has set timetable but operates with special announcement (if needed).

Requests for train paths for all other trains will have priority over the request for train paths for facultative trains.

Infrastructure Manager will not grant facultative train paths on congested infrastructure.

In cases when the degree of utilization of the train path is below the borderline degree of utilization, the Infrastructure Manger will charge the full price of the train path for the used train paths, and for the non-used train paths, which represent the difference between the borderline degree of utilization and the degree of utilization of one train path, IM will charge for the reservation of the train path.

The charge for the reservation is 20% of the agreed train path price.

If the train path is not used in its entirety, as agreed in contract, the full price of the train path will be charged, according to the required elements.

4.8.2. Rules of Cancellation

A Railway Undertaking may cancel the allocated train path as part of changes and amendments of the Timetable. If a Railway Undertaking cancels the allocated route or requires modifications of parameters for the already allocated train paths outside the deadlines set forth in Appendix 4.4 and if they are such that their implementation will result in freeing of infrastructure capacities, such as:

- Cancellation of a part of already allocated train path i.e. shortening of the train path while all other parameters of the allocated train path remain the same,
- Change in traffic regularity, such that the train is transferred from the regular train status into the facultative train status, or the prescribed number of train operating days is reduced,
- Reduction of train length,

IŽS will not charge the costs prescribed under the tariff system under item 5.10.



Cancellation of allocated train path is done in writing, to the following address:

- By mail:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6, Nemanjina St 11000 Belgrade, Serbia

- By e<u>-mail: sektor.pzi@</u>srbrail.rs

Cancelled train paths can be allocated to other railway undertakings by IŽS.

4.9. International Timetabling Process Redesign (TTR)

4.9.1. Objectives of TTR

RailNetEurope (RNE) and Forum Train Europe (FTE), supported by the European Rail Freight Association (ERFA) are currently working on a Redesign of the International Timetabling Process (TTR). The objective of TTR is to harmonise and improve the European rail timetabling system to significantly increase the competitiveness of railway transports.

TTR consists of different components, including in particular an improved planning of the distribution of infrastructure capacity (including temporary capacity restrictions) and the introduction of new capacity allocation processes.

The purpose is to better serve all market needs and achieve an optimised use of existing infrastructure capacity. In particular for passenger traffic it will mean earlier availability of the final timetable allowing earlier and more reliable ticket purchasing for passengers. For the majority of freight traffic, it will mean more possibilities for short-term path requests and thus more flexibility to better meet customers' needs.

Detailed information can be found on ttr.rne.eu and http://www.forumtraineurope.eu/services/ttr/.

TTR is planned to be fully implemented for the timetable 2025 provided that it is supported by the European and national legal framework.



5. SERVICES AND CHARGES

5.1 Introduction

Serbian legislation defined four types of services which railway undertakings can use with the aim of performing of transport operations on the allocated infrastructure capacity.

Categories of services offered by "Infrastructure of Serbian Railways" JSC to railway undertakings on the network are in line with the provisions of the Law on Railways and defined by the following documents:

- Decision on establishing of Joint Stock Company for Public Railway Infrastructure Management ("Official Gazette of RS" No 60/2015);
- Rulebook on organization and systematization of jobs at Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways";
- Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14).

The services that can be provided to railway undertakings are the following ones:

- 1. Minimum access package of services (hereinafter: the minimum package of services);
- 2. Basic services in services facilities including the access tracks to such facilities;
- 3. Additional services; and
- 4. Ancillary services.

Until the Government determines the Methodology for determining the price for access and the price for services and, based on it, the specific rules for calculation of the price for access and the price for services provided by the Infrastructure Manager, "Infrastructure of Serbian Railways" will apply the valid Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14), and according to this Methodology, where necessary, classification to the following service categories:

- Category I: Minimum package of services;
- Category IIa: Package for track access to service facilities;
- Category IIb: Package for provision of services in service facilities;
- Category III: Package for additional services;
- Category IV: Package for ancillary services.

IM – "Infrastructure of Serbian Railways" JSC will enable all interested railway undertakings to use the minimum access package of services and track access to services facilities, in a non-discriminatory manner, provided that railway undertakings have fulfilled the requirements for rail transport service in accordance with the provisions of the Law on Railways and the signed Contract for the use of railway infrastructure. Railway Undertaking's requests for the use of facilities and services provided in such facilities may be rejected only if there are feasible alternatives enabling the railway undertakings to perform the transport of goods and passengers on the same or alternative transport routes under the economically acceptable conditions. According to the nature of distinction and type of activity, the former notion of service facility can be aligned with the notion of services facility in the entire text, and the notion "level of charge for the use of public railway infrastructure" can be aligned with the notion "level of access charges and charges for access to the part of public railway infrastructure connecting the services facilities".

The use of all services facilities, additional and ancillary services provided by the IM – "Infrastructure of Serbian Railways" JSC - will be enabled to all railway undertakings in a non-discriminatory manner and upon their request, and will be defined in a separate contract.

The use of services facilities not owned by the IM – "Infrastructure of Serbian Railways" JSC, as well as additional and ancillary services not provided by the IM – "Infrastructure of Serbian Railways" JSC, is subject to separate contracts with managers of the said facilities and service providers.



Based on the volume of services provided, as defined in items 5.2 to 5.10, Railway Undertaking pays a charge for access and a charge for the provided service to:

- "Infrastructure of Serbian Railways" JSC based on the Contract for the use of railway infrastructure and separate contracts;
- Other service providers based on separate contracts.

5.2 Charging Principles

The basic principles underpinning the charging regime for the use of infrastructure are set forth in the Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14, dated November 11, 2014). The Methodology is defining, in more detail, valuation of elements for determining the level of charge for minimum package of services and package for track access to service facilities and provision of services in service facilities.

The methodology is based on the principle that railway undertakings should only bear the justified cost of IM operations and the costs arising from the efficient provision of services requested by the users.

This methodology is based on the economic principle of valuation of elements for determining of charge level known as marginal cost plus (MC+). It is a charge setting principle based on marginal costs increased by the mark-up. The selected principle enables covering of justified costs arising in provision of requested services and is favourable for the so called "network systems" (systems that require major capital investments such as telecommunications, energy, natural gas transportation, road transport and other means of transport).

Marginal costs are estimated based on the variable costs which, within the Methodology, include short-term marginal costs: track wearing, train movement control and signalling, consumption of energy sources and overheads.

The charge is set based on the following elements: line category (main, regional or local) used by train, use of railway nodes, train category (passenger or freight) and traction type (electrical or diesel).

The components of the total charge include charge for the minimum package of services (category I), charge for track access to service facilities (category IIa), charge for providing the services in service facilities (category IIb), charge for providing the additional services in service facilities (category III) and charge for providing the ancillary services in service facilities (category IV).

5.3 Minimum Access Package and Charges

Minimum access package

Within the minimum package of services for the use of railway infrastructure, IŽS provides the following services:

- Handling of requests for capacity allocation;
- Right to use the allocated capacity:
- Use of infrastructure on the main running track (turnouts, tracks, railway nodes and lines),
- Train control including signalling, regulation of train movements, acceptance and dispatching of trains and communication regarding the train operations and provision of information on train movements;
- Use of electrical supply equipment, where available;
- Provision of all other information to implement or operate the service for which the capacity has been granted.

The access price includes the minimum access package of services. Railway Undertaking will pay the access charge to "Infrastructure of Serbian Railways" JSC based on the Contract for the use of public railway infrastructure.



- Handling of requests for infrastructure capacity

Handling of requests for infrastructure capacity allocation is a part of the capacity allocation process described in Chapter 4. Principles, priorities and criteria for allocation of infrastructure capacity. Requests for infrastructure capacity allocation which have been submitted by railway undertakings are processed in mutual cooperation with railway undertakings, implementation possibilities are examined, contradictions resolved and the train path offer is prepared, which ultimately results in a Timetable.

- Right to use the allocated capacity

Provided that all necessary prerequisites for the train operation are in line with valid legal provisions on conditions for access to and use of railway infrastructure specified in Chapter 3 of the present Network Statement, the applicable legislation and the signed Contract for the use of railway infrastructure, Railway Undertaking is entitled to use the allocated capacity in the form of a train path.

- Use of infrastructure on main running track (turnouts, tracks, railway nodes and lines)

Use of infrastructure on main running track (turnouts, tracks, railway nodes and lines) on the allocated capacity enables the Railway Undertaking to perform train operations.

- Train control including signalling, regulation of train movements, acceptance and dispatching of trains and communication regarding the train operations and provision of information on train movements

Overall train traffic management, including signalling, train movement regulation, acceptance and dispatching of trains, communication regarding the train operations and provision of information on train movements using the telecommunication devices enables railway undertakings to perform train operations on the allocated train path.

- Use of electrical supply equipment

On its electrified railway lines IŽS enables a Railway Undertaking to use the electrical supply equipment for traction (without electricity).

- All other information to implement or operate the service for which the capacity has been granted

After the Timetable has been adopted and published, railway undertakings will be provided with all additional information required for the train operations within the minimum access package of services.

Charge for the minimum package of services (category I)

Charges for the minimum package of services for infrastructure access are defined based on the costs of railway traffic management and infrastructure capacities maintenance.

The level of unit charges is determined in relation to line category (main, regional, local), train category (passenger trains, freight trains) and traction type (diesel, electrical).

The charging units are:

- 1) Train km;
- 2) Gross tonne km.

Charge for minimum package of services (NKI) is determined according to the following formula:

$$NKI = (\sum VKM_{ijk} \cdot C_{VKM_{ijk}}) + F \cdot (\sum BRTKM_{ij} \cdot C_{BRTKM_{ij}})$$

Kev:

i – Line category (main, regional, local)



j – Train category (passenger trains, freight trains)

k – Traction type (diesel, electrical)

 $(\sum VKM_{ijk} \cdot C_{VKM_{ijk}})$ - charge for the use of infrastructure capacities for the minimum package of services in relation to line category (i), train category (j) and traction type (k)

 VKM_{ijk} - number of train km on the network in relation to line category (i), train category (j) and traction type (k)

 $C_{_{VKM}_{_{JK}}}$ - charge per one train km in relation to line category (i), train category (j) and traction type (k)

F - factor depending on the train category (factor level depends on the train category impact on the level of infrastructure maintenance costs or the applied strategy for development of a particular segment of railway market)

 $(\sum BRTKM_{ij} \cdot C_{BRTKM_{ij}})$ - charge for wearing out of line and tracks during train passing in relation to line category (i) and train category (j)

 ${\it BRTKM}_{ij}$ - number of gross-tonne km on the network in relation to line category (i) and train category (j)

 $C_{BRTKM_{ij}}$ - charge per one gross-tone km in relation to line category (i) and train category (j)

The level of charge for the path of one train depends on the train gross mass. Gross-tonne km, in the sense of the calculation of the level of charge for the path of one train, is defined as a product of train km and train gross mass, which implies the total mass of all active locomotives and the total mass of all hauled stock.

Freight trains with electrical traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tonne km [RSD/GTKM]	
Main line	93,50	0,0858	
Regional line	63,77	0,0781	
Local line	10,53	0,0361	

Freight trains with diesel traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	79,04	0,0858
Regional line	51,24	0,0781
Local line	10,07	0,0361

Passenger trains with electrical traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	62,33	0,0686
Regional line	42,51	0,0625
Local line	7,02	0,0289

Passenger trains with diesel traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	52,69	0,0686
Regional line	34,16	0,0625
Local line	6,71	0,0289



Factor depending on the train category [F] is applied to all types of freight trains and passenger trains and amounts to 1.0.

Charge for track access and use of service facilities (categories Ia and IIb)

Charges for track access and use of service facilities are defined based on the costs of railway traffic regulation and infrastructure capacities maintenance.

The level of unit charges is determined in relation to railway node (Subotica, Novi Sad, Beograd, Lapovo, Niš, Pančevo), train category (passenger trains, freight trains) and traction type (diesel, electrical).

The charging units are:

- 1) Number of trains;
- 2) Gross tonne km;
- 3) Number of serviced trains.

The charge is levied for the trains starting and finishing their running in the railway node, that is, transiting the railway nodes, as well as for the trains in railway nodes.

Serviced train is a train to which a service of using the service facilities in a railway node has been provided aiming to use the services of technical-wagon unit in train inspection, maintenance of wagons, railway vehicles and machinery.

Track access and use of service facilities (categories IIa and IIb)

Charge for the use of infrastructure when the trains are starting and finishing their running in the node, that is, when they are transiting railway nodes (NKIIa), as well as for the servicing of trains in the railway nodes (NKIIb) is determined as follows:

NKII = NKIIa + NKIIb

$$Key:- NKIIa = (\sum Va_{lmn} \cdot C_{Valmn}) + (\sum BRTKM_{lm} \cdot C_{BRTKM_{lm}})$$

$$NKIIb = \sum Vb_{lm} \cdot C_{Vb}$$

1 - Node (Subotica (1), Novi Sad (2), Beograd (3), Lapovo (4), Niš (5), Pančevo (6))

m – Train category (passenger trains, freight trains)

n – Traction type (diesel, electrical)

 $(\sum Va_{lmn} \cdot C_{Va_{lmn}})$ - charge for the use of infrastructure capacities in the node for the package of services IIa in relation to node (l), train category (m) and traction type (n)

 Va_{lmn} - number of trains in the node in relation to node (1), train category (m) and traction type (n)

 C_{Valm} - charge per one train for the used infrastructure capacities in the node, in relation to node (l), train category (m) and traction type (n)

 $(\sum BRTKM_{lm} \cdot C_{BRTKM_{lm}})$ - charge for wearing out of railway line and railway track when using the infrastructure capacities in the node, for package of the services IIa, in relation to node (l) and train category (m)

 $\mathit{BRTKM}_{\mathit{lm}}$ - number of gross-tonne km in the node, in relation to node (1) and train category (m)

 $C_{BRTKM_{im}}$ - charge per one gross-tonne km in the node, in relation to node (1) and train category (m)

 $\sum_{Vb_{lm}} \cdot C_{Vb_{lm}}$ - charge for providing the services of train "servicing" in the node, for package of services IIb, in relation to node (l) and train category (m)



 Vb_{lm} - number of trains which were provided with the service (which were "serviced") in the node, in relation to node (l) and train category (m)

 $C_{Vb_{lm}}$ - charge per one train, "serviced" in the node, in relation to node (l) and train category (m)

Freight trains with electrical traction

Node	Charge for the use of infrastructure capacities in the	Charge per one gross-tonne km in the node [RSD/GTKM]
riode	node per one train [RSD/train]	
	node per one train [KSD/train]	
Novi Sad	3.658,76	0,0801
Beograd	4.302,04	0,0894
Lapovo	4.987,87	0,0744
Niš	5.422,50	0,1171
Pančevo	3.257,01	0,0911
Subotica	4.097,11	0,0497

Freight trains with diesel traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tonne km in the node [RSD/GTKM]
Novi Sad	3.607,21	0,0801
Beograd	4.145,57	0,0894
Lapovo	4.935,40	0,0744
Niš	5.293,94	0,1171
Pančevo	3.196,24	0,0911
Subotica	3.944,07	0,0497

Passenger trains with electrical traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tone km in the node [RSD/GTKM]
Novi Sad	2.439,17	0,0534
Beograd	2.868,03	0,0596
Lapovo	3.325,25	0,0496
Niš	3.615,00	0,0781
Pančevo	2.171,34	0,0607
Subotica	2.731,41	0,0332

Passenger trains with diesel traction

Node	Charge for the use of infrastructure capacities in the	Charge per one gross-tone km in the node [RSD/GTKM]
Tiouc	node per one train [RSD/train]	[KOD/OTKIVI]
Novi Sad	2.404,81	0,0534
Beograd	2.763,71	0,0596
Lapovo	3.290,27	0,0496
Niš	3.529,29	0,0781
Pančevo	2.130,82	0,0607
Subotica	2.629,38	0,0332

5.4 Additional Services and Charges

Additional services include:

- Supply of electricity for train traction;
- Preheating of the passenger trains, water supply, etc.;
- Modified contracts for the service:



- (1) control of transport of dangerous goods,
- (2) assistance in transport of special trains (exceptional consignments).

"Infrastructure of Serbian Railways" will enable the use of the above mentioned services (provided by IŽS) to all railway undertakings that have been allocated a minimum access package of services, in a non-discriminatory manner and upon their request.

Railway undertakings must present the request for the use of additional services in the capacity allocation process, please refer to Chapter 4.

In order to be able to use the above services a Railway Undertaking is obliged to conclude a separate contract with IŽS or with another service provider and pay the charge for provided service in accordance with the provisions of such contract.

More detailed information on provision of additional services can be obtained from IŽS.

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St 11000 Belgrade, Serbia Tel: +381 11 3618 214

Tel: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs

The level of charges for additional services provided by the Infrastructure Manager is determined based on the costs incurred during the provision of these services.

Charges for using the additional services are applied in a non-discriminatory manner for all the railway undertakings, that is, service users.

When determining the level of charge the time norms for performing of tasks were used in accordance with the Methodology for determining the required number of workers for performing the planned scope of work ("Official Gazette of ŽTP Beograd" 10/85) and the Methodology for calculation of labour sales price per effective hour for the employees of "Infrastructure of Serbian Railways" (Decision of the Board of Directors 4/2015-53-17 dated 29.12.2015), and other valid railway regulations and documents.

The prices of additional services are determined in accordance with the Methodology for valuation of elements for determining the charges for the use of railway infrastructure. The levels of prices for additional services are determined as a product of standardized period for service performing and price of effective working hour of staff hired to provide the service, and they are solely based on the actual cost of work incurred during the provision of the particular service or directly determined by means of the Infrastructure Manager's separate decision.

Additional services are provided upon the Railway Undertaking's request, and the prices are applied in a non-discriminatory manner for all railway undertakings. Railway Undertakings will pay such prices according to the actual level of use.

- Supply of electricity for traction and charges

For the service of supply of electricity for traction please refer to: "Infrastructure of Serbian Railways" JSC
Electrical Engineering Department
6, Nemanjina St
11000 Belgrade, Serbia
Tel: +381 11 3618 241

Tel: +381 11 3618 241 Fax: +381 11 3618 130 direktor.etp@infrazs.rs



The prices of traction electricity depend on the prices of electricity determined by the supplier (currently JP Elektroprivreda Srbije), actual consumption costs, gross tonne km and train type. The calculation method is provided in Appendix 9.

- Preheating of the passenger trains

"Infrastructure of Serbian Railways" JSC is not providing services of preheating of passenger trains.

More information regarding the preheating of passenger trains are available at:

"Srbijavoz" a.d. 6, Nemanjina St. 11 000 Belgrade, Serbia Tel: +381 11 3614 811 Fax: +381 11 3614 811

- Services for transport of exceptional consignments and dangerous goods

a) Services for transport of exceptional consignments

IŽS provides the service of transport of exceptional consignments (vehicles or items) according to the provisions for transport of exceptional consignments prescribed under the Regulations on transport of exceptional consignments.

The service involves processing of railway undertaking's request to examine the possibilities for transport in terms of technical aspect and setting of other technical requirements and protective measures for transport of consignments that are not fulfilling the general technical standards for transport on the particular line section, e.g. loading gauge, axle loading etc. Any deviation from the standards is considered to be an exceptional consignment and a special procedure is required. The service involves additional engagement of IŽS's employees in preparation and carrying out of transport of exceptional consignments such as: defining of transport conditions, possible engagement of additional staff for accompanying of transport and inspection of tracks after the transport, possible temporary re-location of trackside facilities and equipment etc.

IŽS decides whether it is possible to accept certain transport and under which conditions. It is necessary that IŽS and the Railway Undertaking define the scope and specification of required services for each individual transport.

b) Services for dangerous goods transport

IŽS provides additional services to railway undertakings related to transport of dangerous goods. Control of dangerous goods transport for each individual transport is defined between IŽS and the Railway Undertaking, depending upon the specification of required services. The availability and method of providing this service on IŽS network will be determined based on the decisions and procedures which will be subsequently prescribed by IŽS.

Charges for services of transport of exceptional consignments and dangerous goods

The unit price of additional services regarding the transport of exceptional consignments and dangerous goods is determined based on the actual costs incurred in provision of such service and unit prices of staff hired from the public railway infrastructure manager and is applied in a non-discriminatory manner to all railway undertakings.

Issuing of approvals for transport of exceptional consignments



Operation	Measuring unit	Price in RSD VAT exclusive
Processing of request, issuing of conditions and informing by means of telegramme for the purposes transport of exceptional consignments	Request for transport of exceptional consignment	12.976,00

Accompanying of trains carrying exceptional consignments: involves accompanying of consignments by professional railway staff, as necessary, according to type and complexity of exceptional consignment transport as set out in the Regulations on transport of exceptional consignments.

Unit price for this service is determined according to effective working hours of hiring of the employee and number of persons accompanying the exceptional consignment.

Operation - operators	Measuring unit	Price in RSD VAT exclusive
Accompanying performed by an employee from	Effective hour of	1.844,00
traffic department	accompanying	1.844,00
Accompanying performed by an employee from civil	Effective hour of	1.339,00
engineering department	accompanying	1.339,00
Accompanying performed by an employee from	Effective hour of	1.453,00
electrical engineering department	accompanying	1.433,00

If the employee accompanying the consignment is entitled to daily allowance for the business trip in the country, the service price should also include the cost of realized daily allowances. The amount of daily allowances is determined in the Collective Agreement of the public railway Infrastructure Manger.

Transport of exceptional consignments with exceeded axle-loading

The unit price for approving the transport of exceptional consignment with exceeded axle-loading is 59,00 RSD/net tonnes VAT exclusive.

5.5 Ancillary Services and Charges

Ancillary services include the following:

- 1) access to telecommunications network
- 2) provision of additional information
- 3) technical inspection of rolling stock
- 4) ticketing services in passenger stations
- 5) maintenance services provided in maintenance facilities dedicated to high speed trains or other types of rolling stock requiring specific facilities where the works performed are not a routine daily maintenance and require the vehicle to be withdrawn from service
- **6)** other ancillary services

IŽS reserves the right to decide which of the available ancillary services will be provided and under what conditions. If IŽS is providing a particular service, it will provide it to all railway undertakings under equal conditions in a non-discriminatory manner and upon their particular request.

The charges for ancillary services provided by "Infrastructure of Serbian Railways" JSC will be determined based on the actual costs incurred during the provision of the said service and will be a subject to a separate contract concluded between the interested parties.



1) Access to telecommunications network

IŽS provides railway undertakings with the service of access to the telecommunications network in accordance with the market conditions. Railway Undertaking should define, together with IŽS, the scope and specification of required services.

2) Provision of supplementary information

IŽS provides, if available, the following supplementary information on the use of railway infrastructure to the railway undertakings:

- Provision of Timetable material (timetable graphs, timetable booklets) prepared and published by IŽS;
- Submission of excerpts from the local regulations of importance for railway transport or other documents.

For any further information the Railway Undertaking should define, together with IŽS, the scope and specification of required services.

3) Technical inspection of rolling stock

Technical inspection of rolling stock is performed upon obtaining of license for their use and prior to putting the vehicles into service.

Directorate for Railways prescribes the conditions to be fulfilled by the entities performing the technical inspection of vehicles and the manner for performing of technical inspection.

Only the rolling stock fulfilling the requirements prescribed by the Law on Safety can be included in the train and this is determined by means of a rolling stock inspection.

Railway Undertaking is responsible for proper composition of the train and it is obliged to check whether the train rolling stock is in a proper technical condition. Train composition and distribution of rolling stock in the train must ensure safe train movement and braking.

"Infrastructure of Serbian Railways" JSC is not providing the services of technical inspection of wagons and rolling stock.

4) Ticketing services in passenger stations

"Infrastructure of Serbian Railways" JSC is providing the ticketing services in passenger stations according to the special request of interested Railway Undertaking and according to its own capacities and assessment of impact on its staff's basic work process.

5) Maintenance services provided in maintenance facilities dedicated to high-speed trains or other types of rolling stock requiring specific facilities

The network operated by "Infrastructure of Serbian Railways" JSC currently does not have any maintenance facilities dedicated to high speed trains or other types of rolling stock requiring specific facilities providing the respective ancillary services.

6) Other ancillary services

IŽS provides other ancillary services:

Staff training and/or testing in line with the internal documents and technological procedures of IŽS.



7) Staff training and testing

The service of training and testing of public railway infrastructure user's staff is provided by the Infrastructure Manager in accordance with articles 60 to 64 of the Law on Safety in Railway Traffic ("Official Gazette of RS" No 41/2018) .The price for training and testing of interested users is determined as follows:

$$Cpp = Tpo + Tto + Tpz + Tos$$

This price includes:

- cost of practical training Tpo performed by minimum one expert from the Infrastructure Manager (familiarizing the candidates with the local conditions and technical capacities);
- cost of theoretical training Tto performed by minimum two lecturers (familiarizing with signalling and traffic regulations, special measures for occupational safety and protection as well as all important normative acts provisions of station regulations, technological work process etc., and if necessary provisions in connection to the transport of dangerous goods);
- cost of testing Tpz taking of expert exam regarding the familiarity with railway infrastructure performed by minimum four members of expert committee (president, 2 examiners from the expert field and 1 examiner on the provisions of measures for occupational safety and protection);
- cost of staff Tos hired for the provision of respective service according to the actual level of realization (daily allowances, travelling expenses, submission of required materials etc.)

The price for this service is determined in accordance with the separate Contract between IŽS and the interested party and specification of costs is provided in a descriptive manner and expressed according to the number of candidates and hired experts from the Infrastructure Manager involved in provision of this service.

5.6 Discounts

"Infrastructure of Serbian Railways" JSC does not approve quantity discounts.

5.7 Performance Scheme

One of the most important indicators of efficient network operations, both for Railway Undertaking and Infrastructure Manager, is train delay.

Train delays are monitored related to the causes of delays. Accordingly, the delays can be primary and secondary.

Primary delays are all train delays caused by interference or disturbance which led to the delay and that were not caused by delay or cancellation of other train.

Secondary delays are train delays caused by already existing earlier delay.

Overview of primary and secondary causes of train delays is presented in Appendix 7 of the Network Statement.

IŽS keeps a record of movements of all trains on its network and determines the causes of delay.

Delays can be caused by the following:

- Infrastructure Manager,
- Railway Undertaking,
- external factor.



Number of minutes of train delay is determined on the basis of deviation of train actual running time compared to the train running time envisaged by the Timetable.

The compensation for all primary train delays is calculated on the basis of the number of minutes of train delay and charged between IŽS and RU, if agreed under the Contract for the use of railway infrastructure. The reason for this is to motivate the Railway Undertaking and the Infrastructure Manager to minimize the Timetable deviations on the network and to increase the quality of transport service offered to the end users.

The compensation for delay is 0.1% of the charge for the entire train path, for every minute of delay. The total amount of the delay compensation for every individual train can be maximally up to 5% of the charge for the entire train path, for each party responsible.

For the delays of passenger trains less than 10 min per 100 km of allocated train path, that is, for the delays of freight trains of less than 40 min per 100 km of allocated train path, the charging between IŽS and RU is not performed. Calculation is performed solely for the entire train path, not for the particular parts of the path.

For the train paths shorter than 100 km the permitted delay is determined proportionally to the actual path length.

If the Railway Undertaking does not start the train 300 minutes after the prescribed departure according to the Timetable, it will be deemed that the train path of that train has been automatically cancelled for that day.

Train delays, caused by accidents or incidents, in respect of which the responsibility for the delay cannot be determined with certainty without the investigation procedure, will be calculated subsequently.

Delays caused by the external factor arise from the circumstances which are not under influence of the Infrastructure Manager or the Railway Undertaking. Delays caused by the external factor are the delays caused by the force majeure, or the delays caused by the third parties.

5.8 **Changes to Charges**

Charges for the minimum package of services and track access to service facilities, as well as charges for basic, additional and ancillary services, can be modified depending on the conditions on the market of the railway services, in which case it must be published at least six months in advance.

5.9 **Billing Arrangements**

Method and time schedule for calculation and payment of charges, will be determined in detail in the contract between the Infrastructure Manager and the Railway Undertaking.

Charges are collected through:

Finance Department 6 Nemanjina Str. 11 000 Belgrade, Serbia Phone: +381 11 3618 465 Fax: +381 11 3618 465

finansijeizs@srbrail.rs

The Finance Department defines the payment security instrument for the use of public railway infrastructure.

For the use of public railway infrastructure during the validity period of 2024/2025 Timetable, the payment security instrument is defined according to the following:

The RU undertakes to submit to "Infrastructure of Serbian Railways" JSC (Finance Department) with respect to the timely settlement of due obligations under the contract on the use of public railway infrastructure, 5

61



(five) blank solo bills of exchange registered with the National Bank of Serbia, bill of exchange authorization and a copy of the card of specimen signatures. Blank solo bills of exchange must be submitted within 15 days from the date of signing the contract on the use of public railway infrastructure, otherwise, the contract will have no legal effect. The term of validity of the bill of exchange authorization must be at least 30 days longer than the date of final settlement of the contractual obligation and is not related to the termination of legal effect under the Contract. The RU is obliged to submit to "Infrastructure of Serbian Railways" JSC, Finance Department, new instruments for securing the regular settlement of financial obligations in case the previously submitted ones are implemented, i.e. when other circumstances arise due to which the previously submitted instruments cannot be implemented, no later than 15 days from the new circumstance's occurrence.

The Finance Department monitors the realization of the payment of due obligations under the contract on the use of public railway infrastructure, and in case the RU does not settle the due obligations within the deadline, it has the right to activate bills of exchange, which were submitted in order to secure payment.

If during the duration of the Contract on the use of public railway infrastructure, due to a delay in the settlement of obligations, a security instrument is activated, the RU will be obliged to provide a bank guarantee as an instrument for securing the payment in the following contract. The level of the Bank Guarantee is 25% of the value of invoices issued under the Contract on the use of public railway infrastructure in the past twelve (12) months.

5.10 Tariff system

IŽS charges fee for the train path allocation procedure costs as follows:

- for the allocation of annual train paths for the 2024/2025 Timetable nor for the allocation of train paths under the requests for amendment of annual 2024/2025 Timetable performed within the deadlines prescribed in Appendix 4.4, IŽS will not charge procedure costs.
- for allocation of train path under the extraordinary request for amendment of the annual timetable amount to 17.137,00 RSD per train path.
- for allocation of ad-hoc train path amount to 12.213,00 RSD per train path.



6. OPERATIONS

6.1 Introduction

The transport operation on the railway infrastructure shall be such manner to ensure the protection of life, property and environment. The railway undertaking operating on the railway infrastructure will be obligated to comply with the regulations and provisions applicable to transport operations on the particular railway infrastructure.

6.2 Operational Rules

The list of applicable regulations and instructions related to operational rules is given in a separate Appendix 2.

At some locations on the infrastructure and in some cases, there are deviations from the applicable regulations (approved by the Directorate for Railways upon IŽS's proposal). The information about this is published by IŽS. The relevant address for these regulations, instructions and modifications is:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina Street 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.sp@srbrail.rs

6.3 Operational Measures

In case of traffic disturbances, IŽS, together with Railway Undertakings, will undertake all necessary measures to restore normal operating conditions as soon as possible.

Traffic disturbance will mean congesting of some parts of the network or stations that may occur as a consequence of disturbances occurring in traffic due to any reason.

6.3.1. Principles

In order to solve the traffic disturbances, IŽS will undertake appropriate measures to restore the planned Timetable, while taking into consideration the needs of passengers and users of freight traffic, as well as traffic safety. Aiming to solve the traffic disturbances, IŽS may apply operation rules under 6.3.2., cancel some trains or assign another train path in agreement with a Railway Undertaking, depending on the type of disturbance and expected duration.

In case a longer traffic disruption is expected, IŽS will, in agreement with railway undertakings, prepare an interim timetable for the period until regular operation is restored. IŽS may seek railway undertakings' assistance with the aim of normalizing the traffic operating conditions, even when such railway undertakings are not directly causing the disturbances, which may include using their rolling stock and personnel in order to normalize the traffic.

6.3.2. Operation regulation

For the purposes of restoring the normal traffic flow, the operational rules for railway traffic management will apply as set out in the Law on Safety in Railway Traffic, Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22), the Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22), the Instructions on organization and work procedures of operational service in the area covered by



"Infrastructure of Serbian Railways" JSC ("Official Gazette of Serbian Railways" No 21/17, 21/18 and 37/18) and other internal documents of IŽS.

In cases when traffic is interrupted on some part of the line due to a defect in the traction means of the RU in order to normalize traffic as soon as possible the IŽS operational service takes operational measures prescribed by article 34 of the internal act Instructions on organization and work procedures of operational service in the area covered by "Infrastructure of Serbian Railways" JSC ("Official Gazette of Serbian Railways" No 21/17, 21/18 and 37/18).

In case of delays and premature train dispatches, the rule applies that lower-ranking trains may not interfere with movements of higher-ranking trains. A lower-ranking train can be given the priority only if in such a way increase in delays is avoided and the higher-ranking train can make up for the delay on its further route. With same rank trains, priority is given to that train whereof delay might cause it to lose connections in connecting stations. If the connections are not in question, priority is given to that train which has a longer route to its destination station, i.e. which is running on time. Necessary measures to be taken in case of accidents and incidents are defined in the Law on Safety in Railway Traffic, by the Rules on reporting, investigating, recording, statistical monitoring and publishing of data on accidents and incidents ("Official Gazette of Serbian Railways" 44/21). Instructions on procedures in case of accidents and incidents ("Official Gazette of Serbian Railways" 44/21). Trains which are taking part in rectifying the disturbances caused as a result of accidents and incidents have the priority (ranking) over all other trains.

6.3.3. Foreseen and Unforeseen problems

Foreseen problems

Necessary measures to be undertaken in cases of foreseen problems such as: technical disturbances of signalling & safety and telecommunication devices, strong wind, natural disasters, snow etc., are governed by Traffic Regulations ("Official Gazette of Serbian Railways" No 34/22 and 107/22) and other regulations governing the above mentioned.

Unforeseen problems

In very urgent cases, when railway infrastructure is temporarily rendered unavailable for use, IŽS may, without prior notice, cancel train paths for the time period necessary to put the system back in working order. IŽS will notify all interested parties of the resulting situation.

64



7. SERVICE FACILITIES

7.1. Introduction

Services facility means a facility, including land, buildings and equipment, arranged in a particular manner, as a whole or partially, including the sidings connecting the network with the service facility, in order to enable provision and use of basic services provided in such facilities under the non-discriminatory and transparent conditions.

7.2. Service Facility Overview

Services facilities are:

- 1) station buildings, i.e. a part of station buildings, in passenger stations, intended for railway passengers, and other facilities used in passenger traffic, including the travelling information displays and the appropriate ticketing points;
- 2) freight terminals;
- 3) marshalling yards and train formation tracks, including the shunting tracks;
- 4) tracks for storing intended for railway undertakings' vehicles using the allocated infrastructure capacity;
- 5) maintenance facilities, with the exception of maintenance facilities for high speed trains or other types of rolling stock requiring specific facilities where the works performed are not routine works performed as a part of daily activities and require withdrawal of vehicle from service;
- 6) other technical facilities, including the cleaning and washing facilities;
- 7) inland waterways port facilities connected to railway activities;
- 8) facilities for provision of assistance;
- 9) facilities for fuel storing and supplying for which the prices are presented separately.

7.3. Service Facilities Managed by IŽS

IŽS will enable all railway undertakings, which have been granted the minimum access package of services for the use of infrastructure, to use all the services facilities managed by it in a non-discriminatory manner and upon their request.

7.3.1. Common Provisions

IŽS will enable all the railway undertakings with minimum access package of services to have track access to all the above mentioned services facilities in a non-discriminatory manner and upon their request, provided that railway undertakings have previously entered into a contract on the use of these facilities with facility managers and service providers.

Railway undertakings have to state the need to have track access to service facilities and to use them during the capacity allocation procedure, please refer to Chapter 4.

For the service of track access to service facilities, Railway Undertaking will be obliged to pay a charge to the IŽS based on the Contract for the use of infrastructure.

7.3.2 Use of station buildings in the function of passenger traffic

Appendix 6 contains an overview of locations where passengers may board/get off the train.

The stations along the narrow gauge lines are used for passenger service only.



"Infrastructure of Serbian Railways" will enable the use of station buildings, i.e. the part of station buildings, in passenger stations in the areas intended for railway passengers and of other facilities used for passenger traffic, including the travel information display and adequate location for ticketing services to all railway undertakings in a non-discriminatory manner and upon their request.

The use of parts of service points (station buildings, stops) and other facilities required for acceptance and dispatching of passengers also includes use of platforms and other surfaces required for access of passengers in them, as well as other areas enabling passenger movements between public road surfaces and the train.

The use of travel information displays includes the use of all existing visual information facilities already installed in individual stations.

Upon request of a Railway Undertaking IŽS will, where possible, provide a suitable area for the ticketing services.

7.3.3 Freight Terminals

The term "freight terminals" on the railway network operated by Infrastructure of Serbian Railways (IŽS), means all the railway service points used for freight operations where loading and unloading as transshipment operations are carried out.

The following types of terminals are distinguished: stations and transport forwarding, terminals for intermodal freight transport, port terminals.

Overview of services facilities for freight operations is presented in Appendix 6.

Combined transport on railway network can be performed at terminals for combined transport and at port terminals.

Table No 7: Stations connected to freight terminals

No	Railway station connected to the terminal	Freight terminal for combined transport	Address of freight terminal for combined transport	Terminal operator
1.	Beograd Marshalling yard (Belgrade Marshalling Yard)	ŽIT Beograd	Beograd Marshalling yard, Železnik, Lole Ribara 2.	"ŽIT Beograd" d.o.o., Beograd, Železnik, Lole Ribara 2
2.	Surčin	Nelt	Beograd, Dobanovci, Maršala Tita 206.	"Nelt Co" d.o.o., Beograd
3.	Novi Sad Marshalling yard (Novi Sad Marshalling Yard)	Luka (Port) Novi Sad	Novi Sad, Carinska 1.	"Luka Novi Sad" a.d., Novi Sad, Carinska 1
4.	Pančevo Varoš	Luka (Port) Dunav	Pančevo, Luka Dunav 1.	"Luka Dunav Pančevo" a.d., Pančevo, Luka Dunav 1
5.	Smederevo	Luka (Port) Smederevo	Smederevo, Radinac b.b.	"Luka Dunav – Železara Smederevo" d.o.o., Smederevo, Radinac b.b.
6.	Prahovo Pristanište	Luka (Port) Prahovo	Prahovo, Radujevački put b.b.	"Luka Prahovo IHP Prahovo— Krajina" d.o.o., Prahovo, Radujevački put b.b.



7.	Senta	Luka (Port) Senta	Senta, Pristanišna 1.	"Luka Senta" a.d., Senta, Pristanišna 1
8.	Sremska Mitrovica	III iika (Port) Leget	Sremska Mitrovica, Jarački put 10.	"RTC Luka Leget" a.d., Sremska Mitrovica, Jarački put 10
9.	Nanac	Luka (Port) Zorka Šabac	Šabac, Narodnih heroja 1.	"Zorka transporti" d.o.o., Šabac, Narodnih heroja 1
10.	Niš Marshalling Yard	MBOX Terminals d.o.o	Freight-transport terminal in Niš Vojlovački zaseok 4 St. 18560 Popovac (Niš)	MBOX Terminals d.o.o
11	Batajnica	"Logistički centri Srbije" doo	Batajnica, Ulica Mladih gorana 136	"Logistički centri Srbije" doo

IŽS does not operate nor provide basic services in any freight terminal within the meaning of its definition of an arranged and organized area where the receiving, storage, preparation, transshipmenthipment and dispatching of various types of goods is carried out.

For more detailed information on the services provided by the freight terminal operator or the service provider, the following entities should be contacted:

1) Železnički integralni transport Beograd - ŽIT BEOGRAD d.o.o.

Addresses: Beograd Marshalling Yard (Belgrade Marshalling Yard), Lole Ribara 2 Železnik, Belgrade and Hajduk Veljkov Venac 4/1

11000 Belgrade, Serbia

Contact details: +381 (0)11 361-6844, +381 (0)-1 361 - 6842, +381 (0)64 81040.

2) "Nelt Co." d.o.o. Beograd

Address: Maršala Tita 2016, 11272 Dobanovci, Belgrade

Contact details: +381 (0)11 3779-143, office@nelt.com, www.neltlsp.com

Information on the service facility operated by Nelt Co, i.e. on the industrial siding which is a part of Nelt terminal is provided in Appendix 3.10a.

67

3) DRY PORT TERMINALS DOO

Addresses: Luka Dunav 1, 26000 Pančevo and Uzun Mirkova 3/3, 11000 Belgrade Contact details: + 381 69 32 55 012, office@dpterminal , http://dpterminals.rs Information on the service facility are available on http://dpterminals.rs//

4) "MBOX Terminals" d.o.o

Address: Freight-transport terminal in Niš, Vojlovački zaseok St 4, 18560 Popovac (Niš) Contact details: +381603593499 e-mail: operations@mboxt.com

Information on the service facility are available on https://mboxt.com

5) "Logistički centri Srbije" doo

Address: Ulica Mladih gorana 136, Batajnica

e-mail office@lcs.rs

Information on the service facility are available on www.lcs.rs



IŽS however provides the use of service points open for freight traffic, in accordance with Appendix 6 of this document, for loading, unloading and transshipmenthipment to all railway undertakings in a non-discriminatory manner and upon their request.

7.3.4 Marshalling Yards and Train Formation Facilities, including Shunting Facilities

Freight train formation yards

Freight trains may be split-up and formed at the marshalling, distribution and intermediate stations/yards, according to the user needs and requirements, and taking into account the particular technical and organizational restrictions.

Overview of distribution stations-sections for freight trains operation

Distribution Station	Distribution Section	Comments
1	2	3
BELGRADE MARSHALLING YARD*	Belgrade Marsh. Yard - Pančevo Main St. Belgrade Marsh. Yard - Ruma Belgrade Marsh. Yard - Lapovo Marsh. Yard Belgrade Marsh. Yard - (Mala Krsna) ¹⁾ - Lapovo Marsh. Yard Belgrade Marsh. Yard - Mala Krsna Belgrade Marsh. Yard - Požega Belgrade Marsh. Yard - Novi Sad Marsh. Yard	1)-for the trains not entering the Mala Krsna station
BOGOJEVO	Bogojevo - Sombor Bogojevo - Novi Sad Marsh. Yard Bogojevo - Erdut (HŽI)	
BOR FREIGHT STATION	Bor Freight St Požarevac Bor Freight St Zaječar Bor Freight St Prahovo pristanište	
BIJELO POLJE (ŽICG)	Bijelo Polje (ŽICG) - Vrbnica -Prijepolje Freight St.	
BRASINA	Brasina - Ruma Brasina – Zvornik ¹⁾ Brasina - Zvornik Novi (ŽRS)	¹⁾ -in both directions
VRŠAC	Vršac - Pančevo Main. St. Vršac - Stamora Moravita (CFR SA) Vršac - Bela Crkva 1)	¹⁾ -in both directions
DIMITROVGRAD	Dimitrovgrad – Niš Marsh. Yard Dimitrovgrad –Kalotina Zapad	
ERDUT (HŽI)	Erdut (HŽI) - Bogojevo	
JIMBOLIA (CFR)	Jimbolia (CFR SA) - Kikinda	
ZAJEČAR	Zaječar - Niš Marsh. Yard Zaječar - Prahovo Pristanište Zaječar - Bor Freight St.	
ZVORNIK NOVI (ŽRS)	Zvornik Novi (ŽRS) - Brasina	
ZRENJANIN	Zrenjanin - Kikinda Zrenjanin - Novi Sad Marsh. Yard Zrenjanin - Pančevo Main St. Zrenjanin - Senta Zrenjanin - (Senta) ¹ - Subotica Freight St.	¹⁾ -for the trains not entering the Senta station
KIKINDA	Kikinda – Jimbolia (CFR SA)	1)-for the trains not entering the



	Kikinda – Zrenjanin	Senta station
	Kikinda – Senta	
	Kikinda – (Senta) ¹ – Subotica Freight St.	
	Traffic is temporarily regulated by UNMIK	
KOSOVO POLJE	railways	
	Kraljevo - K. Mitrovica Sever ¹⁾	1)-in both directions
	Kraljevo - Lapovo Marsh. Yard	²⁾ -in both directions
KRALJEVO	Kraljevo - Požega	3)-for the trains not entering the
IIII IESE VO	Kraljevo – Stalać ²)	Požega station
	Kraljevo – (Požega) ³⁾ – Prijepolje Freight St.	1 ozega station
	Lapovo Marsh. Yard – Mala Krsna	1)in both directions
	Lapovo Marsh. Yard – Resavica ¹⁾	²⁾ for the trains not entering the
	Lapovo Marsh. Yard - Niš Marsh. Yard	Mala Krsna station
LAPOVO	Lapovo Marsh. Yard - Kraljevo	Widia Kisha station
MARSHALLING	Lapovo Marsh. Yard – Resnik - Pančevo	
YARD**	Main St.	
	Lapovo Marsh. Yard - (Mala Krsna) ²⁾	
	Belgrade Marsh. Yard	
	Lapovo Marsh. Yard – Belgrade Marsh. Yard	
	Mala Krsna – Požarevac	1)in both directions
	Mala Krsna – Lapovo Marsh. Yard	
MALA KRSNA	Mala Krsna – Belgrade Marsh. Yard	
	Mala Krsna – Smederevo ¹⁾	
	Mala Krsna – Pančevo Main St.	
	Niš Marsh. Yard - Lapovo Marsh. Yard	1)in both directions
	Niš Marsh. Yard - Preševo	in both directions
NIŠ MARSHALLING	Niš Marsh. Yard - Dimitrovgrad	
YARD		
	Niš Marsh, Yard - Zaječar	
	Niš Marsh. Yard – Kuršumlija ¹⁾	1): 1 1 1: .:
	Novi Sad Marsh. Yard - Belgrade Marsh. Yard	¹⁾ in both directions
	Novi Sad Marsh. Yard- Subotica Freight St.	
NOVI SAD	Novi Sad Marsh. Yard- Bogojevo	
MARSHALLING	Novi Sad Marsh. Yard –Pančevo Main St.	
YARD***	Novi Sad Marsh. Yard- Zrenjanin	
	Novi Sad Marsh. Yard - Ruma	
	Novi Sad Marsh. Yard – Temerin ¹⁾	
	Novi Sad Marsh. Yard – Podbara ¹⁾	
	Pančevo Main St Zrenjanin	
	Pančevo Main St Vršac	¹⁾ in both directions
	Pančevo Main St Belgrade Marsh. Yard	²⁾ for the trains not entering the
	Pančevo Main St Novi Sad Marsh. Yard	Mala Krsna station
PANČEVO MAIN	Pančevo Main St Lapovo Marsh. Yard	
STATION***	Pančevo Main St Pančevo Vojlovica 1)	
	Pančevo Main St Mala Krsna	
	Pančevo Main St (Mala Krsna) ²⁾ - Lapovo	
	Marsh. Yard	
	Pančevo Main St Požega	
PEĆ	Traffic is temporarily regulated by UNMIK	
1 LC	railways	
POŽAREVAC	Požarevac – Bor Freight St.	
1 OLANE VAC	Požarevac – Mala Krsna	
	Požega - Belgrade Marsh. Yard	
POŽECA	Požega - Kraljevo	
POŽEGA	Požega - Prijepolje Freight St.	
	Požega - Pančevo Main St.	



PRAHOVO	Prahovo pristanište - Zaječar	
PRISTANIŠTE	Prahovo pristanište - Bor Freight St.	
PREŠEVO	Preševo - Niš Marsh. Yard	
FRESEVO	Preševo - Tabanovce (IŽRSM)	
	Prijepolje Freight St Vrbnica -	¹⁾ for the trains not entering the
PRIJEPOLJE FREIGHT	Bijelo Polje (ŽICG)	Požega station
STATION	Prijepolje Freight St. – Požega	
	Prijepolje Freight St. – (Požega) ¹⁾ - Kraljevo	
PRIZREN	Traffic is temporarily regulated by UNMIK	
IRIZKEN	railways	
	Ruma - Novi Sad Marsh. Yard	
	Ruma - Belgrade Marsh. Yard	
RUMA	Ruma - Šabac	
	Ruma - Brasina	
DOCATE OF TAXABLE	Ruma - Šid	
ROSZKE (MAV ZRT)	Roszke (MAV ZRT) - Horgoš - Subotica	
	Senta - Subotica Freight St.	
SENTA	Senta - Zrenjanin	
	Senta - Kikinda	
	Sombor - Subotica Freight St.	
SOMBOR	Sombor - Bogojevo	
	Sombor – Vrbas ¹⁾	¹⁾ in both directions
STAMORA MORAVITA	Stamora Moravita (CFR SA) – Vršac	
(CFR SA)		
	Subotica Freight St Novi Sad Marsh. Yard	
	Subotica Freight St Senta	¹⁾ for the trains not entering the
SUBOTICA FREIGHT	Subotica Freight St Sombor	Senta station
STATION FREIGHT	Subotica Freight St. – Horgoš - Roszke	
STATION	(MAV ZRT)	
	Subotica Freight St. – (Senta) – Kikinda ¹⁾	
	Subotica Freight St. – (Senta) – Zrenjanin ¹⁾	
TABANOVCE (IŽRSM) Tabanovce (IŽRSM) – Preševo		
TOVARNIK (HŽI)	Tovarnik (HŽI) – Šid	
ĐENERAL JANKOVIĆ	Traffic is temporarily regulated by UNMIK	
	railways	
ŠABAC	Šabac – Ruma	
ŠID	Šid - Ruma	
	Šid - Tovarnik (HŽI)	

NOTE: * For all trains not entering the Belgrade Marshalling Yard, the distribution station operations regarding the notification of traction unit staff on the introduced restricted speed runnings and any other announcements of importance for the traffic safety and regulation regarding the distribution sections toward the adjacent distribution stations are taken over by Ostružnica and Resnik stations.

** For all trains not entering the Lapovo Marshalling Yard, the distribution station operations regarding the notification of traction unit staff on the introduced restricted speed runnings and any other announcements of importance for the traffic safety and regulation regarding the distribution sections toward the adjacent distribution stations are taken over by Lapovo station.

*** Tomaševac station performs the distribution station operations regarding the notification of traction unit staff on the introduced restricted speed runnings and any other announcements of importance for the traffic safety and regulation regarding the distribution sections toward the adjacent distribution stations, as well as the distribution station operations regarding the regulation of train traffic on the railway lines that are not equipped with automatic block, interstation dependence and remote control devices, relating to train



intersections and notification of train staff on the changes regarding the train intersections on Tomaševac – Pančevo Main Station and Tomaševac – Novi Sad Marshalling Yard distribution sections.

There are four marshalling yards on the network where most of the freight trains are formed and split-up, and these stations are at the same time the distribution stations: Belgrade Marshalling Yard, Lapovo Marshalling Yard, Niš Marshalling Yard and Novi Sad Marshalling Yard.

Due to the limited track capacities and the work organization, the train formation and splitting-up is **not permitted** at the following distribution stations: **Bogojevo**, **Dimitrovgrad**, **Preševo**, **Brasina**, **Šid**, **Mala Krsna and Zrenjanin**. The exception is Šid station where the formation of international freight trains and domestic feeder trains can be performed on the designated industrial sidings. The formation of trains at distribution stations Šabac and Požarevac can be performed only if these stations are loading/unloading stations for such trains.

Splitting up and formation of trains are also permitted at particular intermediate stations having the required track capacities: Velika Plana, Zrenjanin fabrika, Kragujevac, Kruševac, Radinac, Smederevo, Sremska Mitrovica, Crveni Krst and Čačak.

The following intermediate stations may also be the departure/terminal stations provided that they are at the same time the loading/unloading stations for such train: Adrovac, Aleksinac, Aleksandrovo predgrađe, Batočina, Brvenik, Valjevo, Vreoci, Grljan, Despotovac, Doljevac, Dragačevo, Elemir, Zvornik, Inđija, Jagodina, Kaona, Lazarevac, Leskovac, Majdanpek, Mataruška Banja, Odžaci, Pančevo Varoš, Pančevo Vojlovica, Paraćin, Petrovac Gložan, Pirot, Podbara, Prahovo, Prokuplje, Raška, Ristovac, Svilajnac, Svrljig, Stara Pazova, Stalać, Surčin, Ćuprija, Čoka, Užice freight station, Futog. The restriction relating to these stations also prescribes that it is not permitted to leave and gather wagons for the purposes of forming other trains.

If the RU requests that the departure/terminal station is the intermediate station that has not been listed, such requests will be considered separately and decisions will be made on such requests depending on the available infrastructure capacities and organization possibilities at the moment of the request submission.

Passenger train formation yards

Dispatching of passenger trains with classical units formed in the technical-passenger station Zemun is possible in Belgrade Center and Zemun stations. In Zemun station track No 11 is equipped with the ramp for loading and unloading of accompanied cars.

The dispatching stations for the EMU and DMU trains can be all stations for passenger traffic, depending on the available capacities and the traffic service hours.

Overview of distribution stations-sections for passenger trains operation

Distribution station	Distribution section	Comments
1	2	3
BEOGRAD CENTAR	Beograd Centar – Novi Sad	
	Beograd Centar – Ruma	
	Beograd Centar – Pančevo Main St.	
	Beograd Centar - Požega	
	Beograd Centar - Lapovo	
BIJELO POLJE (ŽICG)	BIJELO POLJE (ŽICG) Bijelo Polje (ŽICG) - Vrbnica - Prijepolje freight station	
BOGOJEVO	Bogojevo - Sombor Bogojevo - Novi Sad Bogojevo - Erdut (HŽI)	



	Vršac - Pančevo Main St.	
VRŠAC	Vršac - Stamora Moravita (CFR SA)	1)-in both directions
VKSAC	Vršac – Staniora Moravita (CFK SA) Vršac – Bela Crkva ¹⁾	7-III both directions
ERDUT (HŽI)		
DIMITROVGRAD	Erdut (HŽI) – Bogojevo	
	Dimitrovgrad – Niš	
JIMBOLIA (CFR)	Jimbolia (CFR SA) - Kikinda	
7. F.Š. D	Zaječar – Niš	
ZAJEČAR	Zaječar - Prahovo Pristanište	
	Zaječar – Požarevac	
ZVORNIK	Zvornik – Šabac - Ruma	
	Zrenjanin - Kikinda	
ZRENJANIN	Zrenjanin - Novi Sad	
	Zrenjanin - Pančevo Main St.	
	Zrenjanin - Senta	
KIKINDA	Kikinda - Jimbolia (CFR SA)	
KIKINDA	Kikinda - Zrenjanin	
	Kikinda - Senta	
	Kraljevo – Kosovska Mitrovica Sever ¹⁾	¹⁾ in both directions
KRALJEVO	Kraljevo - Lapovo	
KKALJEVO	Kraljevo - Požega	
	Kraljevo – Stalać ¹⁾	
	Lapovo – Belgrade Center	
LAPOVO	Lapovo - Kraljevo	
LAPOVO	Lapovo - Niš	
	Lapovo - Smederevo	
	Niš - Lapovo	
	Niš - Preševo	
NIŠ	Niš - Dimitrovgrad	¹⁾ in both directions
	Niš – Zaječar	
	Niš - Kuršumlija ¹⁾	
	Novi Sad – Beograd Centar	
	Novi Sad – Subotica	
	Novi Sad – Bogojevo	
NOVI SAD	Novi Sad – Vrbas ¹⁾	
NOVISAD	Novi Sad - Pančevo Main St.	
	Novi Sad – Zrenjanin	
	Novi Sad - Ruma	
PANČEVO MAIN	Pančevo Main St Zrenjanin	
STATION	Pančevo Main St Vršac	¹⁾ in both directions
	Pančevo Main St. – Beograd Centar	
	Pančevo Main St Pančevo Vojlov. ¹⁾	
	Pančevo Main St. – Novi Sad	
	Požarevac - Lapovo	
POŽAREVAC	Požarevac - Smederevo	
1 OZMEVIC	Požarevac - Zaječar	
	Požarevac – Beograd Centar	
	Požega - Beograd Centar	
POŽEGA	Požega - Kraljevo	
	Požega - Prijepolje freight station	
PRAHOVO	Prahovo pristanište - Zaječar	
PRISTANIŠTE		
PRIJEPOLJE FREIGHT	Prijepolje freight station - Vrbnica -	
STATION	Bijelo Polje (ŽICG)	
	<u> </u>	1



	Prijepolje freight station - Požega	
PREŠEVO	Preševo - Niš	
PRESEVO	Preševo – Tabanovce (IŽRSM)	
	Ruma - Šabac - Zvornik	
RUMA	Ruma - Šid	
	Ruma - Beograd Centar	
	Ruma – Novi Sad	
ROSZKE (MAV ZRT)	Roszke (MAV ZRT)-Horgoš- Subotica	
	Senta – Subotica	
SENTA	Senta – Zrenjanin	
	Senta – Kikinda	
SMEDEREVO	Smederevo - Lapovo	
SWIEDEREVO	Smederevo - Požarevac	
SOMBOR	Sombor - Subotica	
SOMBOR	Sombor - Bogojevo	
STAMOR MORAVITA	Stamora Moravita (CFR SA) - Vršac	
(CFR SA)		
	Subotica - Novi Sad	
SUBOTICA	Subotica – Sombor	
SUBUTICA	Subotica - Senta	
	Subotica - Horgoš - Roszke (MAV)	
TABANOVCE (IŽRSM)	Tabanovce (IŽRSM) - Preševo	
TOVARNIK (HŽI)	Tovarnik(HŽI) - Šid	
ŠABAC	Šabac - Ruma	
ŠID	Šid – Ruma	
SID	Šid – Tovarnik (HŽI)	

7.3.5 Storage Sidings

IŽS network has the capacities for storing of rolling stock. Rolling stock storing services are provided by the IŽS.

Storing of standard passenger train sets, DMUs, EMUs and locomotives is carried out at all depots for accommodation and storing of rolling stock of "Srbija Kargo" JSC and "Srbijavoz" JSC.

Storing of freight wagons is carried out on special storage sidings for surplus freight wagons at marshalling yards Belgrade Marshalling Yard, Novi Sad Marshalling Yard, Niš Marshalling Yard, Lapovo Marshalling Yard, Subotica, Zaječar, Kikinda, Kraljevo, Pančevo Main St., Požega, Ruma and Sombor.

IŽS is not responsible for any damage which can occur on the rolling stock, that is, on the goods which is located in the stored wagons.

"Infrastructure of Serbian Railways" provides the service of storing of rolling stock to all interested railway undertakings which require storing of rolling stock, in a non-discriminatory manner and upon their request, and to the extent permitted by the infrastructure capacities.

7.3.6 Maintenance facilities

There are rolling stock maintenance facilities on IŽS network, but the maintenance services are not provided by "Infrastructure of Serbian Railways" JSC. Appendix 3.10. contains the details on the rolling stock maintenance facilities.



7.3.7 Other Technical Facilities, including Cleaning and Washing Facilities

"Infrastructure of Serbian Railways" provides the following basic services at technical facilities to railway undertakings in a non-discriminatory manner and upon their request:

Use of wagon scales in stations, where available, according to table 8 of this document;

- Fixed facilities for test braking in station Beograd Ranžirna (Belgrade Marshalling Yard);
- Use of freight loading/unloading ramp;
- Use of ramp for loading and unloading of accompanied cars;
- Use of loading clearance;
- Use of portal crane in Aleksinac station;

The need for using the basic services listed in bullets 1, 3, 4 and 5 must be presented by railway undertakings in the capacity allocation process, whereas the need for other services can be presented in a separate request.

More detailed information on provision of the above stated basic services can be obtained at:

"Infrastructure of Serbian Railways" JSC Traffic Department 6, Nemanjina St 11000 Belgrade, Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 E<u>-mail: sektor.sp@</u>srbrail.rs

Wagon scales

The list of stations in which are located wagon scales is given in the Table 8.

Table No. 8: Wagon scales

No.	Station	Carrying Capacity (t)	Length of weigh bridge (m)	NOTE:
1	Šid	100	20	Wagon scale is electronic.
2	Novi Sad Marshalling Yard	100	20	Wagon scale is electronic.
3	Pančevo main st.	100	20	Wagon scale is electronic.
4	Vršac	100	20	Wagon scale is electronic.
5	Zrenjanin Factory	100	20	Wagon scale is mechanic.
6	Subotica Freight St.	100	20	Wagon scale is electronic.
7	Sombor	100	20	Wagon scale is mechanic.
8	Niš Marshalling Yard	100	20	Wagon scale is electronic.
9	Požega	100	20	Wagon scale is electronic.
10	Čačak	80	15.5	Wagon scale is electronic.
11	Lapovo Marshalling St.	100	20	Wagon scale is electronic.
12	Belgrade Marshalling Yard	100	18	Wagon scale is electronic.
13	Dimitrovgrad	100	20	Wagon scale is electronic.

Fixed installations for brake control

Fixed installations for brake control are located at Beograd Marshalling Yard.



[&]quot;Infrastructure of Serbian Railways" does not have the special facilities and does not provide the services of rolling stock cleaning and washing.

Cleaning and washing facilities

IŽS does not have special facilities for cleaning and washing of railway vehicles. The type, volume and place of cleaning of railway vehicles for passenger service are determined by the railway undertaking.

Other technical facilities

- Ramps for loading and unloading of the load

"Infrastructure of Serbian Railways" JSC will enable usage of the ramps for loading and unloading of the load to all railway undertakings on the non-discriminatory way and upon their request. The need for usage of the ramps for loading and unloading of the load must be shown by the railway undertakings' in the capacity allocation procedure.

- Ramps for loading and unloading of the accompanied vehicles

Loading/unloading ramps for transport of accompanied vehicles are located in stations Zemun, Novi Sad, Subotica and Niš. The need for usage of the ramps for loading and unloading of the accompanied vehicles must be indicated by the railway undertakings in the capacity allocation procedure.

- Loading gauge

Loading gauges that are in function are present at the following stations: Novi Sad Marshalling Yard, Vršac, Čačak, Požega, Dimitrovgrad, Jošanička Banja and Kragujevac.

On IŽS network there are more stations with loading gauges which are not in function currently. The correction of the list of loading gauges will be done upon putting malfunction loading gauges into the functional condition.

- Crane portal in Aleksinac station

Transfer station on the territory of IŽS is Aleksinac. Mobile portable crane PD 86 with capacity up to 32 t is used for transshipmenthipment.

Service for using of wagon scales

"Infrastructure of Serbian Railways" JSC provides the wagon scales services. The price for using the wagon scale amounts to 3,309.00 RSD/wagon without VAT.

Service of loading and unloading using the portal crane in Aleksinac station

The service of loading and unloading using the portal crane together with the staff of public railway Infrastructure Manager is defined by means of a separate contract concluded between the public railway Infrastructure Manager and the Railway Undertaking, i.e. the user of the said service.

Unit price for the use of portal crane for loading and unloading amounts to 150,00 RSD/net tonne of goods VAT exclusive.

IŽS is providing other basic services if required by the railway undertaking and subject to a special contract. Other basic services that can be provided are:

• manning of facilities

Manning of unmanned service points

Structure of manning of non-manned service points, upon the railway undertaking's request, consists of:

- manning of service points of public railway infrastructure manager upon the railway undertaking's request in function of traffic management or shunting movements in such service points outside the working hours for such service point, and
- manning of service points of the railway undertaking upon its request in function of traffic management or shunting movements in such service points because the railway undertaking does not possess adequate traffic staff.



Charge for manning of service points by traffic staff amounts to:

Work place	Train dispatcher	Switch operator
Price in RSD/hour VAT exclusive	1.236,00	955,00

Calculation for periods of manning of non-manned service points starts from the moment of takeover of service at the service point until the moment of handover of service for the purposes of train operation i.e. shunting movement of railway undertaking's train set, and in case of temporarily manned stations (station working hours with interruption) not taking into account the period when the station is manned during the working hours according to the timetable booklet.

In the stations where it is necessary to perform manning with the train dispatcher and the switch operator, the manning period is the same for both employees given the responsibility of both worker during the setting up of a train route.

7.3.8 Maritime and Inland Port Facilities

The following ports are connected to public railway network:

- Port area Novi Sad

Operator: DP World AD Novi Sad, www.lukanovisad.rs

Information on the service facility are available at https://www.dpworld.com/en/serbian/general-terms-and-conditions

Port area Smederevo

Operator: HBIS GROUP Serbia Iron & Steel d.o.o. Beograd, www.hbisserbia.rs

- Port area Pančevo

Operator: Port "Dunav" AD Pančevo

Granexport d.o.o.www.granexport.rs

Specijalna luka d.o.o.

Information on the service facility are available at www.specijalnaluka.rs

- Port area Prahovo

Operator: PD Elixir Prahovo, https://www.elixirprahovo.rs

Information on the service facility are available at www.elixirprahovo.rs/logistika and www.elixirgroup.rs/usluge/logistika/luka-prahovo/

- Port area Senta

Operator: Port Senta A.D.,

Information on the service facility are available at www.luka-senta.rs

- Port area Sremska Mitrovica

Operator: RTC Luka Leget AD, https://www.leget.rs

- Port area Šabac

Operator: PD Elixir Zorka

Information on the service facility are available at https://www.elixirzorka.rs and www.elixirgroup.rs/usluge/logistika/luka-sabac/

7.3.9 Relief Facilities

IŽS has on its disposal a mobile relief facility – relief (auxiliary) train. The services of relief train in cases of remedying the consequences of accidents or incidents are provided by IŽS, using its relief trains and staff, located in Belgrade, Niš and Kraljevo. In order to use the relief train services, a Railway Undertaking must address IŽS in writing:

Center for relief train operations



6, Nemanjina St

11 000 Belgrade, Serbia Tel: +381 11 3620 899 Fax: +381 11 3620 899 Email: direktor.tkp@infrazs.rs

Price of services regarding the provision of relief assistance

The price for providing the basic service regarding the provision of relief assistance is determined based on the actual costs incurred during the provision of such service and it is applied in a non-discriminatory manner for all railway undertakings.

The price of transporting the relief train from the domicile station to the place of work and return to the domicile

No	Means of transport	Measuring unit	Price in RSD, VAT exclusive
1	Traction vehicle - locomotive of the operator – in operation, maneuver or expectation of operation		According to the operators bill
2	Vehicle of the working unit (ZOP, ETP, SP,) within "IŽS" – trolley, truck, etc.		According to the account of the working unit "IŽS" which performed transport
3	GEISMAR road-rail vehicle type V2R-730-S – road driving	hour	15.156,00
4	GEISMAR road-rail vehicle type V2R-730-S – railway driving	hour	18.156,00
5	Traction vehicle – locomotive "IŽS" or locomotive leased (locomotive operation + staff operation + energy) -in operation	hour	41.000,00
	-in expectation of operation	hour	15.000,00

Price for equipment and tools for the operation of relief (auxiliary) train

No	Asset description	Type of work	Measu ring unit	Price in RSD, VAT exclusive
1	Relief train	Expecting of work	hour	2.000,00
2	Relief train	Work on preparation and retrieval of intervention equipment	hour	4.000,00
3	GEISMAR road-rail vehicle type V2R-730- S	Work during intervention	hour	15.156,00
4	Jack EDK 1000 (99 72 9 471 001-4)	Expecting of work	hour	5.000,00
5	Jack EDK 300 (99 72 9 471 101-2)	Expecting of work	hour	5.000,00
6	Jack DHPD 65 (99 72 9 571 001-3)	Expecting of work	hour	5.000,00
7	Jack EDK 1000 (99 72 9 471 001-4)	Preparation, Work, Retrieval	hour	56.970,00
8	Jack EDK 300	Preparation, Work, Retrieval	hour	27.248,00



	(99 72 9 471 101-2)									
9	Jack DHPD 65 (99 72 9 571 001-3)	Preparation, Work, Retrieval	hour	30.146,00						
10	LUKAS equipment	Preparation, Work, Retrieval	hour	7.066,00						
11	WALTER trolley	Installation and removal	hour	6.000,00						
12	WALTER trolley	Transport	hour	3.320,00						
13	WALTER trolley	Remaining of trolley under the rolling stock – lump sum	hour	600,00						
14	Stable power generation unit	Work	hour	2.400,00						

Note: operating time is calculated in full hours – each started working hour of equipment and assets is counted as a full working hour.

Labour costs for relief train's staff

No	Type of work	Measur ing unit	Price in RSD VAT exclusive
1	Assistant on relief train	hour	704,00
2	Electromechanic	hour	981,00
3	Driver and operator of a two-way motor vehicle	hour	1.016,00
4	Rail crane operator	hour	1.027,00
5	Hydraulic equipment operator	hour	1.027,00
6	Locksmith on the relief train	hour	1.027,00
7	Rail vehicle mechanic	hour	1.027,00
8	Relief train manager	hour	1.126,00
9	Expert associate for circuit inspection	hour	1.175,00
10	Assistant relief train chief	hour	1.282,00
11	Relief train chief	hour	1.605,00
12	Employees participating in the work of relief train	pcs	1.800,00

Note: operating time is calculated in full hours – each started working hour is counted as a full working hour.

7.3.10 Refuelling Facilities

"Infrastructure of Serbian Railways" JSC is providing the services of fuel storing and issuing for refuelling of traction vehicles of all railway undertakings.

This relates to refuelling facilities at service points – stations and depots:

Pančevo main St., Lapovo, Kraljevo, Požarevac, Požega, Sombor, Kikinda, Belgrade Marshalling Yard, Crveni Krst, Ruma, Zaječar, Zrenjanin, Vršac and Subotica.

Detailed information on the services of fuel storing and issuing for refuelling of traction vehicles are available at:

Department for Procurement and Central Warehousing 6, Nemanjina St

11 000 Belgrade, Serbia

Tel: +381 11 3620 094

Email: nabavke.infra@srbrail.rs

Price for the service of storing and refuelling

The price for the service of fuel storing and issuing for the purposes of refuelling of traction vehicles of all railway undertakings is determined based on the actual costs incurred during the provision of this service and is applied in a non-discriminatory manner for all railway undertakings.



The service of fuel storing and issuing for the purposes of refuelling of traction vehicles amounts to 5.43 RSD per stored litre of diesel fuel VAT exclusive.




APPENDICES

- 1. Organizational chart of "Infrastructure of Serbian Railways" JSC
- 2. Internal regulations (documents) and technological procedures
- 3.1 Loading gauge JŽ I
- 3.2 Loading gauge UIC-GA
- 3.3 Loading gauge UIC-GB
- 3.3a Loading gauge UIC-GC
- 3.4 Electrified lines
- 3.5 Power supply facilities
- 3.6 Overview of signalling & safety devices equipping level
- 3.7 Overview of telecommunication devices equipping level
- 3.8 List of stations with industrial sidings on which it is possible to handle dangerous goods (RID goods)
- 3.8 b List of service points where it is possible to perform transshipment of dangerous goods
- 3.9 Alternative transport routes
- 3.10 Facilities for rolling stock maintenance
- 3.11 Railway infrastructure development projects
- 4.1 Request for train path allocation (form)
- 4.1.b Template for submission of traction vehicle technical data
- 4.2 Instructions for completion of Request for train path allocation (form)
- 4.3 Deadlines for annual 2024/2025 Timetable preparation
- 4.4 Deadlines for amendment of annual 2024/2025 Timetable
- 5.1. Overview of railway lines on which train running is possible when they are manned only with engine driver
- 5.2. Overview of the lines fulfilling the conditions for train running with an engine driver only
- 5.3. Geometry of pantograph (current collector) TYPE POS 254/III used on IŽS network
- 6. Register of infrastructure data
- 7. Overview of primary train delay causes
- 8. Overview of platforms and arranged surfaces in service points
- 9. Method for calculation of electricity consumption for train traction
- 10. Railway node boundaries



Appendix 1: Organizational chart of "Infrastructure of Serbian Railways" JSC

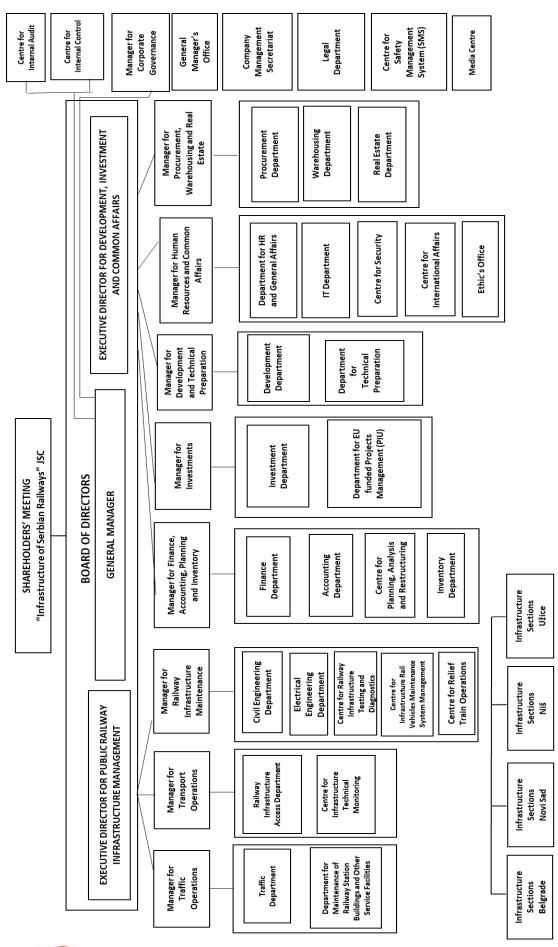



Appendix 2: Internal regulations (documents) and technological procedures


The internal regulations (documents) and the technological procedures applied by IŽS are listed in the Registry of regulations of importance for traffic safety i.e. in item 1.3 Internal general regulations of "Infrastructure of Serbian Railways" JSC.

The registry of regulations of importance for traffic safety is published on the web site of "Infrastructure of Serbian Railways" JSC in section About us/Library/Regulations/Safety Management System/Appendices to the Safety Management System Rules of Operation/Appendix 12.1 Library- Registry of regulations (О нама/Библиотека/Правиници/Систем управљања безбедношћу/Прилози Пословника система управљања безбедношћу/ Прилог 12.1 Библиотека-Регистар прописа).

Available on link https://infrazs.rs/izs-osnovni-podaci/biblioteka




Appendix 3.1. Loading Gauge ŽS I

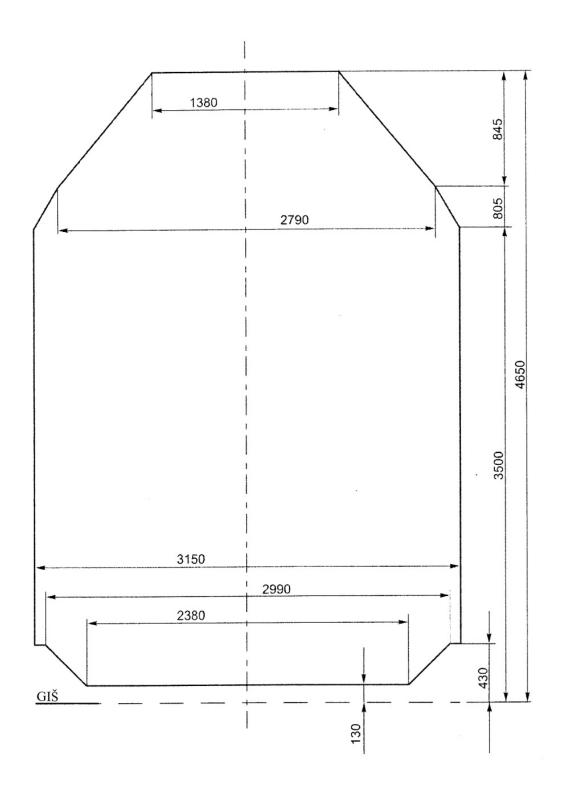




Appendix 3.2. Loading Gauge UIC-GA

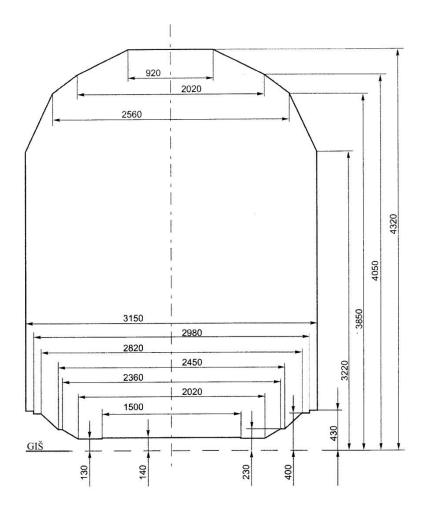




Appendix 3.3. Loading Gauge UIC-GB

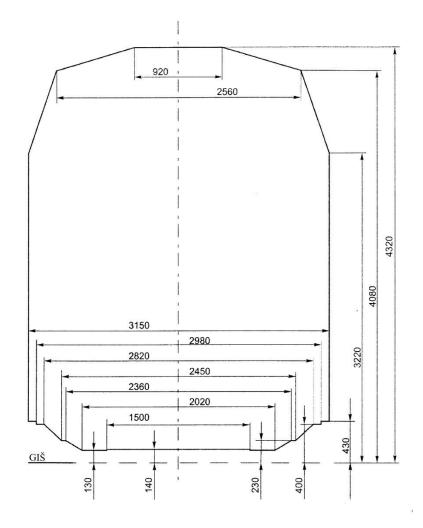



Network Statement 2025

Appendix 3.3a Loading Gauge UIC-GC

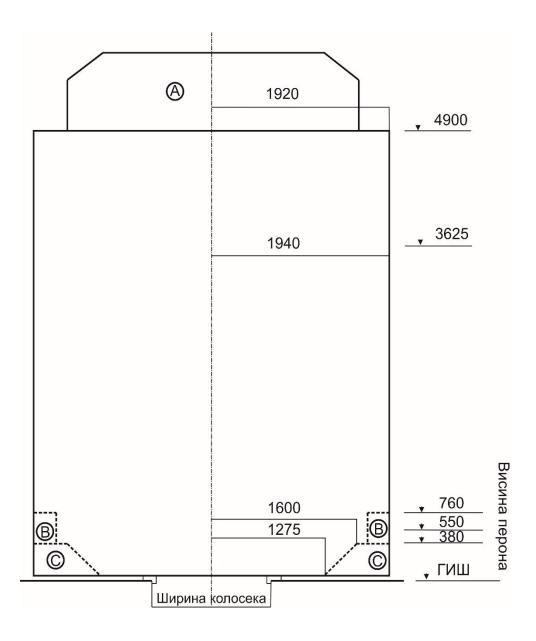

A - Pantograph movement space



B-Area for positioning of platforms according to leaflet UIC 505-4, for the speeds of up to 200 km/h $\,$

C – Possibility of reserving the space for low platforms and specific installations

Appendix 3.4. Electrified lines

Main lines:

- 1. Beograd Centar Stara Pazova Šid State Border (Tovarnik)
- 2. Beograd Centar Rasputnica G Rakovica Mladenovac Lapovo Niš Preševo State Border (Tabanovce)
- 3. (Beograd Centar) Rakovica Jajinci Mala Krsna Velika Plana
- 4. (Jagodina) Rasputnica Ćuprija Ćuprija Paraćin
- 5. (Beograd Centar) Stara Pazova Novi Sad Subotica State Border (Kelebia)
- 6. Niš Dimitrovgrad State Border (Dragoman):
 - electrified on section Dimitrovgrad State Border
- 7. Beograd Centar Pančevo Main St. Vršac State Border (Stamora Moravita):
 - > electrified on section Beograd Centar Pančevo varoš
- 8. (Beograd Centar) Resnik Požega Vrbnica State Border (Bijelo Polje)
- 9. Beograd Marshalling yard "A" Ostružnica Batajnica
- 10. Beograd Marshalling yard "B" Ostružnica
- 11. Beograd Marshalling yard "A" Rasputnica "B" Rasputnica "K/K1" Resnik
- 12. Ostružnica Rasputnica "B" (Rasputnica "K/K1")
- 13. Beograd Marshalling yard "B" Rasputnica "R" Rasputnica "A" (Resnik)
- 14. (Beograd Marshalling yard "B") Rasputnica "R" Rakovica
- 15. Beograd Marshalling yard "A" Rasputnica "T" Rakovica
- 16. Beograd Marshalling yard "B" Rasputnica "T" (Rakovica)
- 17. connecting track in the area of Rasputnica "K/K1": (Rasputnica "B") skretica "K" skretnica "K1" (Jajinci)
- 18. (Rasputnica Pančevački most) Rasputnica Karađorđev park Rasputnica Dedinje (Rasputnica G)
- 19. Inđija Golubinci
- 20. Novi Sad Novi Sad Marshalling yard Rasputnica Sajlovo
- 21. bypass track of station Mala Krsna: (Kolari) branching turnout 1 branching turnout 28 (Osipaonica)
- 22. Rasputnica Lapovo Varoš Lapovo Marshalling yard Lapovo
- 23. Trupale Niš Marshalling yard Međurovo
- 24. Crveni krst Niš Marshalling yard
- 25. Niš Rasputnica most (Niš Marshalling yard)

Regional lines:

- 1. Novi Sad Odžaci Bogojevo:
 - electrified on section Novi Sad Sajlovo
- 2. Stalać Kraljevo Požega:
 - electrified on section Kraljevo Požega
- 3. connecting track to station Požega: (Uzići) branching turnout No 53 branching turnout No 54 (Dragačevo)

87

- 4. Smederevo Rasputnica Jezava Radinac Mala Krsna
- 5. Mala Krsna Bor Rasputnica 2 (Vražogrnac):
 - electrified on section Mala Krsna Požarevac
- 6. Subotica Horgoš State Border (Röszke)

Local lines:

- 1. Novi Sad Novi Sad ložionica:
 - > electrified on section Novi Sad Blok 3 Novi Sad
- 2. Pančevo Varoš Pančevo Vojlovica



Appendix 3.5 Power supply facilities

No	Facilities	Chainage
	ine 101 Beograd Centar – Stara Pazova – Šid – State Border– (Tovarnik)	<u> </u>
1.	PS Beograd Centar	000+000
2.	EVP Zemun	000+000
3.	PSN Batajnica	021+970
4.	PS Stara Pazova	034+794
5.	PS Putinci	053+600
6.	PSN Ruma	066+245
7.	PS Sremska Mitrovica	081+700
8.	EVP Martinci	094+200
9.	PS Kukujevci	105+000
10.	PS Šid	116+400
	Line 102 Beograd Centar – Mladenovac – Lapovo – Niš – Preše	
(Taban		vo – State Border–
11.	PSN Košutnjak	007+726
12.	PS Rakovica	007+720
13.	PS Kijevo	010+128
14.	EVP Resnik	010+128
15.	PS Klenje	024+800
16.	PSN Ralja	032+340
17.	PS Sopot Kosmajski	041+565
18.	EVP Mladenovac	053+100
19.	PS Glibovac	074+000
20.	PSN Mala Plana	084+350
21.	PS Plana	089+700
22.	EVP Markovac	099+345
23.	PS Lapovo Varoš	106+309
24.	PS Lapovo Putnička	109+207
25.	PSN Bagrdan	119+122
26.	EVP Jagodina	136+262
27.	PS Ćuprija	148+200
28.	PS Paraćin	154+971
29.	PSN Sikirica	165+025
30.	PS Stalać	176+154
31.	PS Braljina	186+600
32.	EVP Đunis	195+130
33.	PS Korman	205+540
34.	PS Aleksinac	214+077
35.	PSN Grejač	223+479
36.	PS Trupale	234+104
37.	PS Niš	243+287
38.	EVP Niš	248+755
39.	PS Doljevac	261+410
40.	PSN Pečenjevce	276+752
41.	PS Leskovac	287+910
42.	EVP Grdelica	300+580
43.		319+561
	PS Džep	
44.	PSN Suva Morava	332+860
45.	PS Vranjska Banja	347+765
46.	EVP Ristovac	365+370
47.	PS Bukarevac	386+617



48.	PSN Tabanovci	400+060
Main	Line 103 (Beograd Centar) – Rakovica – Jajinci – Mala Krsna – Velika F	lana
49.	PS Beli Potok	017+800
50.	PSN Vrčin	026+400
51.	PS Mali Požarevac	042+800
52.	EVP Vodanj	056+700
53.	PS Mala Krsna	070+600
54.	PSN Lozovik	086+000
Main	Line 105 (Beograd Centar) – Stara Pazova – Novi Sad – Subotica – State	Border– (Kelebia)
55.	EVP Indija	041+984
56.	PSN Beška	053+905
57.	PS Sremski Karlovci	065+685
58.	EVP Novi Sad	079+985
59.	PS Kisač	090+600
60.	PSN Zmajevo	102+600
61.	EVP Vrbas	119+480
62.	PS Lovćenac	129+637
63.	PSN Bačka Topola	143+850
64.	PS Žednik	157+620
65.	EVP Subotica	167+920
66.	PS Subotica	177+180
67.	PSN Subotica	184+450
Main	Line 107 Beograd Centar – Pančevo Main St. – Vršac – State Border– (S	tamora Moravita)
69.	PS Beograd Centar	000+000
70.	PS Pančevački Most	004+687
	Line 108 (Beograd Centar) – Resnik – Požega – Vrbnica – State Border–	
71.	PS Barajevo	015+420
72.	PSN Stepojevac	029+610
73.	PS Lazarevac	045+310
74.	EVP Slovac	059+248
75.	PS Valjevo	077+905
76.	PSN Lastra	093+056
77.	PS Ražana	111+239
78.	EVP Kosjerić	118+229
79.	PS Požega	140+420
80.	PSN Uzići	150+295
81.	PS Užice – teretna	162+319
82.	EVP Sušica	178+379
83.	PS Zlatibor	193+407
84.	PSN Jablanica	206+350
85.	PS Priboj	225+338
86.	EVP Pribojska Banja	232+750
87.	PS Bistrica	241+248
88.	PSN Prijepolje	257+226
89.	PS Lučica	264+695
90.	EVP Brodarevo	273+360
91.	PS Vrbnica	285+096
	Line 111 Beograd Marshalling yard "A" – Ostružnica – Batajnica	
92.	PS Železnik – ulaz	001+290
93.	PS Železnik – izlaz	002+615
94.	PSN Surčin	013+485
<i>_</i>	1 1	015 105



Regiona	l Line 213 Stalać – Kraljevo – Požega	
95.	EVP Kraljevo	080+565
96.	PSN Ovčar Banja	120+900
	Regional railway line 201 Subotica – Horgoš – State Border –	
	(Röszke)	
97.	PS Bački Vinogradi	15+717

Remote	control centers	
98.	Centar DU Beograd	M2: 005+145
99.	Centar DU Niš	M2: 243+560
100.	Centar DU Novi Sad	M4: 078+038

Abbreviations:

EVP - Electric traction substation

 $\ensuremath{\mathbf{PSN}}$ - Track sectioning post with neutral line

PS - Track sectioning post

CDU - Remote control center



Appendix 3.6 Overview of signaling & safety devices equipping level

1 1 1 1 1 1 1 1 1 1			_	_	_	_	_	_	_			_		_	_	_		_		_	_		_	_	_	-		_	_	_	_	_	_			-	_	_				_	_		_
1 1 1 1 1 1 1 1 1 1			24	17																																- 50 55		case							
1 1 1 1 1 1 1 1 1 1	o varde	Cecutral positioning of turnout	23	64																																									
1 1 1 1 1 1 1 1 1 1	n marchallir	Automatic positioning of quant and and no thornul	CC CC	77													55																												
	Devices	Marshalling yards without automatic marshalling	21	7.7			Ť										-													-															1
Part		Marshalling yards with	20 130	0.7			T																																						1
Part	nipped	Nechanicalsignal	10										П																												П				7
Part	Signal eq	Ising is a figure of the sign	180 011	91	292	coc	170	187		Ξ	203		Ī	9 9	=	2	9	2	2	2	4	0	٥	7		4			2	- -											Ħ	ı			8
	П	Mechanical signal	17					2	20			30	91	T							Ī							T					4	20	5	×	Ξ			6		=			
	121	Light signal	16	217	106	0.00	66	73	3	103	177	12	13	2	-		4	2	1	1	-					4	1	4		28 106	2	0		11	5	7	4	-		14	Ц	43			3
	Signs	Mechanical signal	15	3		_	1	2	20	19		37	49		Ш			Ц			1	\perp		\perp		\perp	Ш			1	Ц	L	==	26	7	×	=	200	Ц	10	Ц	=			_
Proceedings Proceedings Process Proces	Ц	s Inngie Mgid z	17	182	410	+ 12	160	292	25	113	307	20	18	9 2	21	2	9	2	2	2	9	0	9	7	٥	4	-	4	2	2 48	Į.	+		17	91	2	∞			23	Ц	9			16
10	out heating	Gas	1 01 (uniforms	4																																									
	Tum	Electrical	12	40	106	061	79	82		79	104						-					,	·			2				т г		6									Ц				2
			-	92	180	100		138		87		247	83				15								39+6			77		36			27	253	32	00	73	2		92		195			32
	locking		10	0.7				25																																					
Programmer Pro	Turnout inter	interlocking by means of	0	`				4		∞			63																				4		7		∞								
10 Beognad - Status Particular Status		interlocking by means of electrical	×	341	630	660	151	171		116	306	91	19		32	2				1	3	132	3			4				100	,	+		7	19	0				8		22			22
11 Bengmark Ramin, W. P. Espatinical Telescoped Ramin, W. P. E			1				ļ	1	9	5		15				T				T	†	T	1					1		T	Ħ		1	6	9		00			2	Ħ	_		1	1
RAILWAY LINES			SIIO	-	-	,	ļ	2	12	-		4	-	1						İ	1	T	1		-			-		Ť			İ	3	1	,	-	8		7		_		7	1
10 Boognad - Stam Parova - Sid - State Bonder - (Tro-amily) 15 16			moet of state	,	-				27	1		-	∞												2					-			-		1		2	700		2		7			-
RAILWAY LINES Page			4				İ															Ī													1										
Second Second	1		"	15	**	CC	15	17	2	5	34	2	-		2		1						-							1		-		1	1	-				1		∞			-
Second Second		RAILWAY LINES	,	1	Beograd - Mladenovac - Lapovo - Niš - Preševo - State Border -	(Tabanovce)	(Beograd) - Rakovica - Jajinci - Mala Krsna - Velika Plana (Beograd) - Slara Pazova - Novi Sad - Subotica - State Border -	(Kelebia)	Niš - Dimitrovgrad - State Border - (Dragoman)	Deogram Celian - raincevo gravita statinca - visac - state botuci - (Stamora Moravita)	(Beograd) - Resnik - Pozega - Vrbnica - State Border - (Bijelo Polje)	Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral Janković - State Border - (Volkovo)	Subotica - Bogojevo - State Border - (Erdut)	Beograd Centar - Novi Beograd Beograd Centar - Resuminica G - (Releavice)	Beograd Ranžima "A" - Ostužnica - Batajnica	Beograd Ranžirna "B" - Ostružnica	Beograd Ranžirna "A" - Rasputnica "B" - Rasputnica "K/K1" - Resnik	Ostružnica - Rasputnica "B" - (Rasputnica "K/K1")	Beograd Ranžirna "B" - Rasputnica "R" - Rasputnica "A" - (Resnik)	(Beograd Ranžirna "B") - Rasputnica "R" - Rakovica	"A" - Rasputnica	beograd Kanzima "B" - Kasputmea "1" - (Kakovica) vezni kolosek na području Rasputnice "K/K1": (Rasputnica "B") -	skretnica "K" - skretnica "K1" - (Jajinci)	Topcider - Kasputinea Savski most - (Novi Beograd) Topčider - Beograd spoljna - Beograd Dunav - Rasputnica Pančevački	most obilazni kolosek stanice Beograd Spoljna: (Topčider) - Blok 1 "Obala" -	Blok 2 "Prelaz" - (Beograd donji grad) (Rasputnica Pančevački most) - Rasputnica Karadordev park -	Kasputinca Dedinje - (Kasputinca O) Indija - Golubinci	Novi Sad - Novi Sad Ranžima - Rasputnica Sajlovo	odvojna skretnica 28 - (Osipaonica)	Rasputnica Lapovo Varoš - Lapovo ranžirna - Lapovo Trupale - Niš ranžirna - Međurovo	Crveni krst - Niš ranžirna	inis - Kasputinca most - (twis fanzinta) Spojin kolosek stanico Nis. (Crveni krst) - odvojna skretnica 2 - odvojna skretnica 4. t ^c ole krala	Subotica - Horgos - State Border - (Roszke)	Pančevo Glavna stanica - Zrenjanin - Kikinda - State Border - (Jimbolia)	Banatsko Miloševo - Senta - Subotica	Pančevo Varoš - Rasputnica 2a - (Jabuka) Novi Sad - Odžaci - Bosojevo	(Novi Sad) - Rasputnica Sailovo - Rimski šančevi - Orlovat stajalište	Novi Sad Ranžirna - Sailovo Rasmitnica	Orlovat - Rasputnica 1a - (Lukićevo)	Ruma - Šabac - Rasputnica Donja Borina - State Border - (Zvornik	(Platičevo) - Rasputnica 1 - Rasputnica 3 - (Štitar)	Stalać - Kraljevo - Požega erodni kolosek etanice Kraljevo: (Matamiška Rania) - odvojna ekretnica	spojin korosek stanice kranjeve. (vanan uska Danja) - čevejna skretinea broj 72 - odvojna skretinica broj 73 - (Adrani)	spojni kolosek stanice Požega: (Uziči) - odvojna skretnica broj 55 - odvojna skretnica broj 54 - (Dragačevo)	Smederevo - Mala Krsna
		Railway Line No	-	Ť		\neg	-		-	$\overline{}$	_				$\overline{}$			$\overline{}$		117 (118	_	$\overline{}$	1	\neg	$\overline{}$	\neg	\neg	\neg	-	1	-			-	- /	-	_	1		-	_	$\overline{}$		
		0N	-	-	·	4	m	4	S	9	7	∞	6	01	12	13	4	15	16	17	81 0	61 6	20	22	23	24	25	26	27	28	30	32	33	34	35	36	38	39	40	41	42	43	4		



_	_		_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_			_	_	_	_	_	_	_		_		_	_	_	_	_	_		_	_	_				_	_	_	_
		Manual positioning of turnouts qrund off no		24																																														•	O
	g yards	Ccentral positioning of turnout	Number of turnouts	23																																														c	0
	Devices in marshalling yards	Automatic positioning of quunt aft no luorini		22									11 - 2									4 82																											Ī	1	22
	Devices II	Marshalling yards without automatic marshalling	stations	21								= 3						1																															Ť	+	7
	3	Marshalling yards with automatic marshalling	per of	20														1	1			3 23	2 1		1										S - 50														ı		0
minned	AS	Mechanicalsignal	palises	19			1							1			1	1	1				01		1	1	1	1		Ť	1		T										П	П			П		Ť	,	9
Sional equipped	with AS	lsngie Mgid	No of b	18	3																		0.0								Ī														A						1212
	ıer	Mechanical signal	S	17	14	22		51	3	3						-	Ι			4	2					12			2	T	T		-	12									П	П			П			27.3	263
type	=	lengis Mgid	Signa	91	45	4	1						-	1		-	1	1	2	4	7		2				2		3	3	T		Γ				T					П	П	П			П		T	1000	121/
Sional type	in		ы.	15	13	34		36	3	3						-				4	2		90 - 30			15	1		2		Ī		1	12	3 5							П	П	П		-	П		T	900	338 1217
	Main	lsngis 14gi J	Nu	4	178	22	7	29	1				_	7		_	7	7	2	∞	7		2		1	1	7	1		6	1		T	П			T	1				П	П	П			П	П	T		2123
eatino	Г	Cas	of turnouts	13															1											l	1													П					T	Τ	0
Tumont heating		Electrical	ö	12	24		1	∞									1	1	1	1					1		1	1		1	1																		T	700	630
ľ	ρλ	On-site control and interlocking means of turnout lock		=	156	127		59	10	3			7	2		-	4		84	46	26	19	10	10		52	91	8	41	=	1		9	64	17		14			20	9			П		-	7	4	4	Tues	2574
ckino	9	On-site control and interlocking by means of electrical controller	turnouts	10				9					0 0				1	1				2 22	3 - 6												2 83 6 8										0.00				T	;	31
Turnout interlocking			101	6	1	∞												1										1			1																		T		103
1		Central control desk and interlocking by means of electric positioning devices		8	09	15		66												4					1						1		l																T	97.5	2349
\vdash		furnout dependence	1	7		14	+	1		1				+	+		+	+	+	+			1	_	+	9	+	1		+	\dagger		H	2			+	1	+		2		Н	H					+	+	94
ŀ	-ls	furnout dependence Mechanical devices without signa				_	+	1						1	-		+	+	+	+					+	_		1			+		H	-			+	+		_			Н	Н					+	+	┨
ŀ	-		9	9	9	-	1		-				_	1	+	1	+	+	+	-	-	3 - 23	1		+		-	-	1	+	+		L	4			1		-	_			H	H					+	+	35
	цij	Electrical-mechanical devices w	Number of sta	2	-	2			-	1																				1	1												Ľ	Ц					1	- 5	9
L		Incomplete relay interlocking		4	4	2	_	-									4	4	4						4	_				1	1							_	_					Ц			Ц		\downarrow	+	×
	10 Á	Complete interlocking with relay electronic devices		3	10	2		4												7			24 - 23																											10,	187
		RAILWAY LINES		2	Mala Krsna - Bor - Rasputnica 2 - (Vražogrnac)	Crveni krst - Zaječar - Prahovo pristanište	(Rgotina) - Rasputnica 3 - Rasputnica I - (Trnavac)	Doljevac - Kastrat - Kosovo Polje	Kuršumlija - Kastrat	(Barlovo) - Rasputnica 1 - Kuršumlija	Kosovo Polje - Metohija - Peć	Kosovo Polje Teretna - Rasputnica 1 - (Drenica).	Subotica - Subotica fabrika	Subotica - Subotica bolnica	Kanjiža - Horgoš	Novi Sad - Novi Sad Iožionica	Podbara) - Rasputnica 3 - Rasputnica 2 - (Kać)	(Rimski šančevi) - Rasputnica 1 - Rasputnica 3 - (Podbara)	Rimski šančevi - Bečej	Vrbas - Sombor	Petrovaradin - Beočin	Apatin Fabrika - Strilić - Sombor	Bač - Karavukovo	Bačka Palanka - Gajdobra	(Brasina) - Rasputnica Donja Borina - Zvornik Grad	Šid - Sremska Rača Nova - State Border - (Bijeljina)	Kikinda - Banatsko Arandelovo	Sečanj - Jaša Tomić	Zrenjanin Fabrika - Vršac - Bela Crkva	Pančevo Varoš - Pančevo Vojlovica	Utima) - Kaspumica A - Kaspumica B - (Jasenovo)	spojni kolosek stanice Senta: (Coka) - odvojna skretnica 22 - odvojna skretnica 23 - (Orom)	Požarevac) - Rasputnica Sopot Požarevački - Kostolac	Markovac - Resavica	Ovča - Padinska Skela	Metohija - Prizren.	Bečej - Vrbas	Vršac - Vršac Vašarište	Alibunar - Seleuš	Vladimirovac - Kovin	Čoka - Novi Kneževac	Kikinda - Metanolsko sircetni kompleks (km 6+413)	Bogojevo - Dunavska obala	Sombor) - Rasputnica Strilić - Bački breg	Sombor - Ridica	Višnjićevo) - Rasputnica Rača - Sremska Rača	Paracin - Stari Popovac	Surčin - Jakovo Bečmen	(Beograd spoljna) - km 2+290 odvojna skretnica - Fabrika šećera	Sarganska osmica	Total:
		Railway Line No	1	\neg	215 N	\neg	\neg	-		220 (_	222 F	301	-	-		-	\neg	_	\neg	309 F		311 E	312 E	\neg	_	-	7.	-	-	319	320	321 (Н	323 (+	-1	404	$\overline{}$		$\overline{}$	۲	0,	ľ	411 F	$\overline{}$		201	1
		οN		-	47	-	49	20	51	52	53	54	55	99	57	28	59	09	19	62	63	64	65	99	29	89	+	\dashv	71	+	/3	74	75	92	77	78	79	08	81	82	83	84	85	98	87	88	68	\vdash	+	92	1
_																																				_	_														



											INTER	LOCKI	NG FAC	TLITIE	S								
				- W									West started and	crossing	333	devices							
			Interstal	tion deper device	ndence		Autor	natic b	oloc		Auton	natic posi	itioning o	of level	Man	ual positi cross		f level	Traf	fic remote	contro	l devi	ces
			9	20	een	0	10			ed with	ba	arrier or rier udinal	only o	colour ignals		trical ices		nanical rices	9	, c	centers	stations	rolled
		RAILWAY LINE	rack lin	track lin	ses betw	rack lin	track lin	points		s equipp	logit	uumai							rack lin	track lir	contro	contro	ely cont
	ine No		ength of single track line	ength of double track line	Number of distances between stations	ength of signle track line	ength of double track line	Number of block points	Number of signals	Number of signals equipped with auto-stop devices	uc	<u> </u>	uc	W.	ис	٧.	ис	<u> </u>	cngth of signle track line	Length of double track line	Number of remote control centers	Number of remote control stations	Number of remotely controlled stations
	Railway Line		Length	Length	Number	Length	Length	Numbe	Numbe	Numbe auto-st	in station	on track	in station	on track	in station	on track	in station	on track	Length	Length	Numbe	Numbe	Numbe
°Z 1	la	2	kr 3	n 4	kom 5	6 k	m 7	8	9	10	- 11	12	pcs 13	14	15	16	17	18	19 k	m 20	21	pcs 22	23
	101	Beograd - Stara Pazova - Šid - državna granica -	-	1				61	120	120	14	12	1.7	14	15	10	17	10	17	97+918	1	5	6
1	102	(Tovarnik) Beograd - Mladenovac - Lapovo - Niš - Preševo -	6+000		1		14+150	195	443	289	37	53	1	I	2		8	4		971916	2	38	15
2	102	državna granica - (Tabanovce) (Beograd) - Rakovica - Jajinci - Mala Krsna - Velika	01000		1	93+143	14+130	41	81	81	11	3	1		2		1	-			1	12	4
3	103	Plana (Beograd) - Stara Pazova - Novi Sad - Subotica -	15+020		4	133+722		61	121	121	15	8			2	1	1	2				12	-
5	105	državna granica - (Kelebia) Niš - Dimitrovgrad - državna granica - (Dragoman				16+100		6	11		5	7			3	4	7	4					
6	106	Beograd Centar - Pančevo glavna stanica - Vršac - državna granica - (Stamora Moravita)	82+200	19+070	14		19+600	10	26	26	4	2					8	1					
7	107	(Beograd) - Resnik - Požega - Vrbnica - državna granica - (Bijelo Polje) Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral	287+013		33						3	9	1	15	-				287+013		1	26	9
8	108	Lapovo - Kraljevo - Lesak - Kosovo Polje - Đeneral Janković - državna granica - (Volkovo Subotica - Bogojevo - državna granica - (Erdut	69+820		11						3	5	2		1		7	4					
10		Beograd Centar - Novi Beograd Beograd Centar - Rasputnica G - (Rakovica	09+820		11		2+887 4+416	2	4 8	4 8	1	3	1				11	10					
12	112	Beograd Centar - Rasputinica G - (Rakovica Beograd Ranžirna "A" - Ostružnica - Batajnica Beograd Ranžirna "B" - Ostružnica				25+658 5+902	+++10	14	26	26	1	1									1		2
14	113	Beograd Ranžirna "A" - Rasputnica "B" - Rasputnica	h e			10+419		4	8	8	1						1		3			1	1
15	115	"K/K1" - Resnik Ostružnica - Rasputnica "B" - (Rasputnica "K/K1")				2+121		1	2	2													
16	116	Beograd Ranžirna "B" - Rasputnica "R" - Rasputnica "A" - (Resnik)				4+538		2	2	2													
17 18	117 118	(Beograd Ranžirna "B") - Rasputnica "R" - Rakovica Beograd Ranžirna "A" - Rasputnica "T" - Rakovica				1+149 0+709																	
19		Beograd Ranžirna "B" - Rasputnica "T" - (Rakovica) vezni kolosek na području Rasputnice "K/K1":				8+379		3	5	5													
20	120	(Rasputnica "B") - skretnica "K" - skretnica "K1" - (Jajinci)				0+463																	
21	121	Topčider - Rasputnica Savski most - (Novi Beograd Topčider - Beograd spoljna - Beograd Dunay - Rasputnica Pančevački mos				3+578 6+257	4+519	1	1							1	0	0					
23	123	obilazni kolosek stanice Beograd Spoljna: (Topčider) - Blok 1 "Obala" - Blok 2 "Prelaz" - (Beograd donji grad)	71			1+757											1						
24	124	(Rasputnica Pančevački most) - Rasputnica Karadordev park - Rasputnica Dedinje - (Rasputnica G)					1+591																
25 26		Indija - Golubinci Novi Sad - Novi Sad Ranžima - Rasputnica Sajlovo	4+020 3+749		1 2	4+020		2	4	4													
27	127	obilazni kolosek stanice Mala Krsna: (Kolari) - odvojna skretnica 1 - odvojna skretnica 28 - (Osipaonica)				2+387					1												
28		Rasputnica Lapovo Varoš - Lapovo ranžirna - Lapovo					3+788																
29 30	130	Trupale - Niš ranžirna - Međurovo Crveni krst - Niš ranžirna				1+220 17+100	1	1	2	1		2											
31	131 132	Niš - Rasputnica most - (Niš ranžirna) Spojni kolosek stanice Niš: (Crveni krst) - odvojna				4+990 0+500		4	7		1	1 2									\exists	\dashv	
32 33	201	skretnica 2 - odvojna skretnica 4 - (Ćele kula) Subotica - Horgoš - državna granica - (Roszke)	24+351		5	UT300					3	2					2	2					
34	202	Pančevo Glavna stanica - Zrenjanin - Kikinda - državna granica - (Jimbolia)	131+318		14					· ·	4	10			1		11	4					
35 36		Banatsko Miloševo - Senta - Subotica Pančevo Varoš - Rasputnica 2a - (Jabuka)	80+264 1+600		14							1					2	2					
37	205	Novi Sad - Odžaci - Bogojevc (Novi Sad) - Rasputnica Sajlovo - Rimski šančevi -	89+457		10							1			1		7	4					
38	206	(Novi Sad) - Rasputnica Sajiovo - Rimski sancevi - Orlovat stajalište Novi Sad Ranžirna - Sajlovo Rasputnica	65+405 2+502		11							1					4	3					
40	208	Orlovat - Rasputnica 1a - (Lukićevo) Ruma - Šabac - Rasputnica Donja Borina - državna	0+630		1										60		04						
41	209	granica - (Zvornik Novi) (Platičevo) - Rasputnica 1 - Rasputnica 3 - (Štitar)				101+951						3			4	3	3	6					
43	211	Stalać - Kraljevo - Požega				135+733						2	1		2		4	5					
44	212	spojni kolosek stanice Kraljevo: (Mataruška Banja) - odvojna skretnica broj 72 - odvojna skretnica broj 73 - (Adrani)																					
45	213	spojni kolosek stanice Požega: (Uzići) - odvojna skretnica broj 53 - odvojna skretnica broj 54 - (Dragačevo)																					
		Smederevo - Mala Krsna Mala Krsna - Bor - Rasputnica 2 - (Vražogrnac)				11+742					1	1	1		1		2	2					
48	216	Crveni krst - Zaječar - Prahovo pristanište	() ()									1			1		7	1					
50	218	(Rgotina) - Rasputnica 3 - Rasputnica 1 - (Trnavac) Doljevac - Kastrat - Kosovo Polje													1								
		Kuršumlija - Kastrat																					



										INTER	LOCKI	NG FAC	TLITIE	S								
												Level	crossing	safety o	levices							
		120,200,000	device	ndence		Auto	matic b	loc		Auton		itioning o	of level	Man	al positi	ioning of sings	level	Traf	fic remote	contro	ol devi	ces
	RAILWAY LINE	c line	k line	between	c line	k line	nts		uipped with	ba	nrrier or rier udinal	only o	colour ignals	elec dev	rical ices		anical ices	c line	k line	ntrol centers	ntrol stations	controlled
No Railway Line No		Length of single track line	Length of double track line	Number of distances between stations	Length of signle track line	Length of double track line	Number of block points	Number of signals	Number of signals equipped with auto-stop devices	in station	on track	in station	on track	in station	on track	in station	on track	Length of signle track line	Length of double track line	Number of remote control centers	Number of remote control stations	Number of remotely controlled stations
		kr		kom	kı	m	0		10		10	pcs	3.4	1.	16	17	10		m	21	pcs	22
1 1a	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
	(Barlovo) - Rasputnica 1 - Kuršumlija		_	-			_			-										-		-
53 221 54 222																					\vdash	-
	Subotica - Subotica fabrika	4+100		1			_						1				4				\vdash	-
	Subotica - Subotica Iaorika Subotica - Subotica bolnica	2+745		1									1			—	7					\dashv
57 303		21/43		-							-										\vdash	-
58 304		2+870		1										2			1				\vdash	=
59 305		3+659		2													<u> </u>			t	Н	\neg
	(Dimeli čančavi) - Daenutnica 1 - Daenutnica 2 -			Ī.																		
60 306	(Podbara)	0+910		1																		
61 307	Rimski šančevi - Bečej										9			1		9						
62 308	Vrbas - Sombor									1	1			2		1	1					
	Petrovaradin - Beočir	17+035		3												2	2					
	Apatin Fabrika - Strilić - Sombor	38+304		4							3					1	2					
	Bač - Karavukovo	13+420		2										1		1						
	Bačka Palanka - Gajdobra	14+422		2			_									2	4			_	Ш	-
67 313	(Brasina) - Rasputnica Donja Borina - Zvornik Grac				6+818		_								_					-	Ш	-
68 314					25+612												2					
	Kikinda - Banatsko Arandelovc	12+916		4												2				-	\Box	-
	Sečanj - Jaša Tomić	10+363		1																	\sqcup	-
	Zrenjanin Fabrika - Vršac - Bela Crkvε	65+3348		4							1					4					\vdash	
	Pančevo Varoš - Pančevo Vojlovica	2+907		2							1			1	3					-	\vdash	-
73 319	(Uljma) - Rasputnica A - Rasputnica B - (Jasenovo)	0+488	_	1	-		_			_	-									-	\vdash	-
74 320	spojni kolosek stanice Senta: (Čoka) - odvojna skretnica 22 - odvojna skretnica 23 - (Orom)										8											
13	(Požarevac) - Rasputnica Sopot Požarevački - Kostolac				9+900																	
76 322		10 1 500			53+250		_		-		1		1	1		3	4			-	\vdash	-
	Ovča - Padinska Skela	18+580		1	18+580		_				3									-	\vdash	-
-	Metohija - Prizren. Bečej - Vrbas															1					\vdash	-
	Vršac - Vršac Vašarište															1					\vdash	-
81 403		8+386		1													_				\vdash	-
	Vladimirovac - Kovir	43+030		1													2					\neg
	Čoka - Novi Kneževac	12+300		2												1	-					\neg
100	Kikinda - Metanolsko sirćetni kompleks (km 6+413)	7+255		1																	\Box	
	Bogojevo - Dunavska obala	2+733		1																		
86 408	(Sombor) - Rasputnica Strilić - Bački breg	28+090		1																		
	Sombor - Ridica	32+741		1																		
	(Višnjićevo) - Rasputnica Rača - Sremska Rača				3+830																Ш	\Box
	Paracin - Stari Popovac									1						1						\blacksquare
90 412	Surčin - Jakovo Bečmei				4+400																	-
91 413	(Beograd spoljna) - km 2+290 odvojna skretnica - Fabrika šećera				0+600																	
92 501	Šarganska osmica		_			_	10.0	or:	400	407	46-	-			4-	40-					0.	- 25
	Total			161			416	876	699	107	127	7	18	28	12	115	76			6	82	37



Appendix 3.6a Request for issuance of encryption keys for communication in the ETCS system $\,$

1. Identific	eation data of the rai	lway carrier:				
Address:				•••••		
Contact pe	rson:					
E-mail:						
Phone/Mol	bile Phone					
		1				
2. Identific	ETCS-ID (NID_Engine) decimal form	EVN (European Vehicle Number)	Home- KMC of the vehicle	Baseline	OBU- producer	Requested begin of validity
example	996823	91 83 9586 616-0	IZS	3.6.0	CRSC	2024/6/15
☐ the hom ☐ the men ☐ home K KMC ID .	nation of home KM he KMC of the given tioned OBUs do no MC is a KMC othe httor of the given KM	n OBU is KMC IZ t have any home I r than KMC IZS:		-		become the KMC IZS
Contact pe	rson:					
□ all lines	est the allocation of equipped with ETC ain track sections (a	CS level 2 track se	ction and oper	ated by IZS	 5,	



Appendix 3.7 Overview of telecommunication devices equipping level

Series Se
1
1 1 1 1 1 1 2 2 2 2
1
1
1
1 1 2 2 2 2 2 2 2 2
1
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
1 0 0 1 0 0 0 0 0 0
1
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
1
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
1
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
1 6 13 14 15 15 15 15 15 15 15
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
9 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0



Г				Station dispatching devices	bcs	32	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	181
				Dispatching exchanges	bcs	31	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	10
	ų				bcs	30	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	7
	Telegraph	dingway		$_{\rm u}$ Step by step" system	ype	59															1	†	t	T	r				- 10			П	1	
	L	1	_								-								_		+	+	+	H	L					_		H	+	
				Ејеспоијс	bcs	28	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	80
					type	27																												
SHIND					bcs	26	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	11
EXCHANGE UNITS				ESK	type	25			1													1	Ī	T	Ī							П	1	
EXC		r			bcs	24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
	Telephone	anondana		EMD with electric motor dialler	type	23			1												1	1	t	t	F								1	
	T	-			ty	2			4			_	4							4	4	4	1	-	L							Ц	4	
				Cross-bar	bcs	22	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	12
					type	21																												
					bcs	20	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	11
				"Zieb pλ sieb" sksiem							H			Н			L	Н		4		+	+		L								4	
L					type	H			_												_	+	+	_	L								4	-
	_	_		Sound signalling devices	bcs	18	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	156
	Telegraph	Permitter		Telefaxes	bcs	17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	=
	Tel			Teleprinters	bcs	16	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	88
				Others	bcs	15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	126
			hones	At automatic block (APB)	bcs	14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	397
			Trackside telephones	At level crossings (PP)	bcs	13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	284
			Track	slangie tixs 1A	bcs	12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	351
EVICES				At entry signals	bcs	11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	415
TERMINAL DEVICES			remote control desks	Ar failway yandina A	bcs	10	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	201
	Telephone	puloue	Traff.remote desks	At operational dispatching centers	bcs	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0 0	0	0	0	0	0	0	0	0	0	0	24
FINAL	Tele	-	T	PA telephones		H	H	Н	\dashv	0	0	0	0	0	0	0	0	0	0	0	0	0 0		+	H	0	0	0	0	0	0	Н	0	×
		-		PPA telephones		H	0	Н	+			+	0	0	0	0	0	0	-		0	+		+	H	0	0	0) 0	0	0		0	96
		-				H			-													+		-	H								-	-
				Зосисних ветя	_	H	0	Н				+	0	0	0	0	0	0	-	-		+		H	H	0	0	0	0	0	0		0	182
		-		Automatic telephone devices		H	0	Н	\dashv	\mathbb{H}	-	+	-	0	0	0	0	-	+	0	+	+		╀	H	0	0	0	0	0	0		0	4598
		-		CB relephone devices		H	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	262
				LB telephone devices	bcs	3	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	6	0	0	0	0	0	0	0	0	0	0	0	880
				lway line Yo	oN Rain	2	45 306 (Rim. Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	Н	309	310	311	312	46 313 (Ruma)-Rasp.Donja Borina-Zvomik Grad	52 314 Sid-Sremska Rača Nova-State Border.	60 315 Kikinda-Banatsko Arandelovo	1 316 Sečanj-Jaša Tomić	81 317 (Zrenjanin)-Zrenjanin fabr. Vršac-Bela Crkva	67 318 Pančevo Varoš-Pančevo Vojlovica	319	320	321	322	52 403 Alibumar-Salani	404	59 405 Čoka-Novi Kneževac	61 406 Kikinda-MKS (ind.kolosek)	58 407 Bogojevo-Dunavska obala	72 408 Sombor-Bački Breg	73 409 Sombor-Ridica	79 410 (Višnjićevo)-Rasput.Rača-Sremska Rača	411	\rightarrow	57 413 (Bgd spoljna)-km 2+290-Fabrika šećera	Total:



												T NER T	OTHER TELECOMMUNICATION DEVICES	AUNICA	TION DEV	TCES									
		Device	s for recc	recording of tr statements	Devices for recording of transmitted statements		Devices dis	Devices displaying accurate time	zurate time		2007	PA devices	s		Int	Interphones		Pc	Power supply devices	devices		Passenger visual information display	risual infor	mation di	splays
o Zanii yawin	RAILWAY LINE	g cpsuucja	12 channels	16 channels	24 channels	Number of stations	Clock exchange units	Master clocks	Impulse regenerators								For outdoor installation	Acummulator batteries	Retifiers	Сопуейегя	Motor electric generator units	Zuniber of stations	Control desks	sysiqsib noitsamo'nl	Information kiosks
B.	3	pcs 33	pcs 34	pcs 35	pcs 36	pcs 37	pcs 38	36	pcs 40	pcs 41	pcs p	pcs pc	pcs pcs 44 45	s pcs	ss pcs	pcs 48	pcs 49	pcs 50	pcs	pcs 52	pcs 53	pcs 54	pcs 55	sze sze	pcs 57
	ler	1	-	0	0	3	2	1	13	Н	Н	H	Н	Н	Н	Н	0	16	16	0	0	10	0	0	0
	Niš-Preševo-State Border.	9	2	0	-	9	2	21	78	323	20	50 32	325 20	9 (4	38	17	72	7.1	0	1	1	1	4	0
4 103 (BGD)-Rakovica-Ja 2 104 (BGD)-S Pazova-In	(BGD)-Rakovica-Jajinci-M.Krsna-V.Plana (BGD)-S Pazova-Indiia-Subotica-State Border		0 -	0 -	0	20	00	3	20	133	1 6	1 6	6 1	0	0 0	0 -	0 0	110	25	0 0	0	0 -	0 0	0 0	0 0
105	tate Border.		0	0	0	0	0	2	3	20	-			0	0	0	0	7	13	0	0	0	0	0	0
6 106 BGD Centar-Pancevo-Vrsac-S 1 107 (BGD)-Resnik-Podgonca-Bar	BGD Centar-Pancevo-Vršac-State Border. (BGD)-Resnik-Podgorica-Bar	1 2	0 0		0 0	34	0 8	e #	v ¥	212	7 2	7 7	72 6			3 20	0 -	3 62x12V 222x2V	47	0 0	0 0	0 0	e 0	0 93	0 0
20 108 Lapovo-Kraljevo-Đ.	Lapovo-Kraljevo-B-Janković-State Border.	- 0	0	0 0	0	6	0	6	0 0	81 0	60	3 2	24 0	0 0	0 0	0 0	0 0	16x6 v 28	26	- 0	0 0	0 0	0 0	0 0	0 0
110	i Beograd	0	0	0	0	0	0	1	1	2			7 6	0	0	0	0	0 4	n 00	0	0 0	0 0	0 0	0	0
	nica"G"-(Rakovica)	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0	0
 112 BGD Ranzima "A"-Ostrużnica 14 113 BGD Ranžima,"B"-Ostružnica 	Ostružnica Ostružnica	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	4 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0	0	0 0	0 0	0 0	0 0	0 0	0 0
13 114 BGD Ranžima "A"-	BGD Ranzima "A"-Rasp."B"-Rasp."K"-Resnik	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	0	0 0	0 0	0 0	0	0 0	0 0	- 0	1 0	0 0	0 0	0 0	0 0	0 0	0 0
116	Rasp."R"-Rasp."A"	0	0	0	2	0	0	1	0	20	0		20 1	0	0	0	0	-	3	0	0	0	0	0	0
11 117 (BGD Ranžima "B" 9 118 (BGD), BGD Panžir	(BGD Ranžima "B")-Rasp."R"-Rakovica	0	0 0	0 0	0	0	0	0 0	0	0	0	0	0 0	0 0	0	0 0	0 0	0	0	0 0	0 0	0 0	0 0	0	0
119	BGD Ranžima "B"-Rasputnica "T"-(Rakovica)	0	0	0	0	0	0	0	0	0	0			0	0	0	0	0	0	0	0	0	0	0	0
	s.B)-Ras.K-Ras.K1-Jajinci	0	0	0	0	6	0	8	0	10	0	4 0	11 2	0 0	0	0	0	- 0	2	0	0	0	0	0	0
121	Topčider-Kasp. Savski Most-(Novi B.GD.) TopčBlok 1Obala-Blok 2 prelRas.Pan.Most	0	0	0	0	0	0	0	0	3 0	0 0	1	5 1	0	0	0	0	7 0	0	0	0	0 0	0 0	0	0
123	-BGD Spoljna-Blok 2 prel	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0	0
31 124 (Vukov Sp.)-Ras.K.)	(Vukov Sp.)-Ras.K.Park-Ras.Dedinje-(Rakov.)	0	0 0	0 0	0 0	0	0	0 0	0	0	0 0	0 0	0	0 0	0 0	0	0	0 0	0	0 0	0 0	0 0	0 0	0	0
126	rna-Sajlovo Rasp.	0	0	0	0	0	0	0	1	10	0		0 0	0	0	0	0	1	1	0	0	0	0	0	0
41 127 Obilazni kolosek Mala Krsna 21 128 I anovo Varoči anovo Banžii	Obilazni kolosek Mala Krsna	0	0	0 0	0	0	0	0	0	0	0	0	0 0	0 0	0 0	0 0	0	0	0	0 0	0 0	0 0	0 0	0 0	0
129	na-Medurovo	0	0	0	0	0	0	1	0	56		6 3		0	0	0	0	2	3 0	0	0	0	0	0	0
17 130 Crveni Krst-Niš Ranžirna 23 131 Niš-Basandnica Most-Niš Banžirna)	užirna	0	0 0	0 0	0	0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	0 0
18 132 (Cr.Krst-Skr.2)-Skr.	3-Skr.4-(Čele Kula)	0	0	0	0	0	0	0	0	0	0	0,	0	0	0	0	0	0 0	0	0	0	0	0 0	0	0
202	Subonea-Horgos-State Border. Pančevo Glavna-Zrenjanin-Kikinda-State Border.	1	0	0	0	0	0	0	0	0	2	2	7 2	0	0	0	0	2	9	0	0	0	0	0 0	0
203	Senta-Subotica	0	0	0	0	0	0	0	0	0	0		0 0	0	0	0	0	0	0	0	0	0	0	0	0
44 204 Pančevo Varoš-Rasputnica "2a"-(Jab 39 205 N.Sad-Sajlovo Rasputnica-Bogojevo	Pančevo Varoš-Kasputmca "2a"-(Jabuka) N.Sad-Sailovo Rasputnica-Bogojevo	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0
206	(N.Sad)-Sajl.RaspR.ŠančOrl.staj(Tomaš)	0	0	0	0	0	0	0	0	0				0	0	0	0	0	0	0	0	0	0	0	0
	N.Sad Kanzirna-Sąjlovo Kasputnica Orlovat-Rasputnica "1a"-(Lukićevo)	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0
47 209 Ruma-Sabac-Rasp.Don 50 211 Stalać-Kralievo-Požega	Oonja Borina-State Border.	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 -	0 14	0 %	0 0	0 0	0 0	0 0	0 0	0 0	0	0 00	0 0	0 0	0 0	0 0	0 0	0 0
214	sua	0	0	0	0	2	0	0		2	1	1 -	5 1	0	0	0	0	-	-	0	0	0	0	0	0
$\overline{}$	M.Krsna-Bor-Rasputnica "2"-(Vražogrnac)	0	0	0	0	∞ -	0	2	7	01	. 3	4 6	22 3	0 0	0	0	0 0	18	10	0	0	0 0	0 0	0	0
53 Z10 Aus-Zajccar- Francovo pristaniste 64 Z18 (Niŝ)-Doljevac-Kastrat-Kosovo Polje	rat-Kosovo Polie	0	0	0	0	0	0	0	0	0	0	7 0	0 (0	0	0	0	0	0	0	0	0	0 0	0	0
219		0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0	0
220	za "1"-Kuršumlija	0	0	0	0	0	0	0	0	0	0	0 0	0	0 0	0 0	0	0	0	0	0	0	0 0	0 0	0	0
302	olnica	0	0	0	0	0	0	0	0	0	0 0	00	0	0	0	0	0	0	0	0	0	0	0	0 0	0
303		0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0	0
36 304 Novi Sad-Novi Sad 37 305 Podhara Parrut "3"	Novi Sad-Novi Sad Iožionica Podhara-Paenut "3", Paenut "3", Kači	0 0	0 0	0 0	0 0	0	0	0 0	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	- 0	1 0	0 0	0 0	0 0	0 0	0 0	0 0
306	ut "1"-Rasput, "3"-(Podb.)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
308		0	0	0	0	0	0	0	0	0	0		0 6	0	0	0	0	0	0	0	0	0	0	0	0
69 309 Petrovaradin-Beočin 74 310 Souta Apolin Gheila Strilić (Sombor)	n Secilit / Cambori	0	0	0	0	0	0	0	0	0 0	0 0	0 0	0	0	0	0 0	0 0	0 0	0	0	0 0	0 0	0 0	0 0	0 0
311	a-sume-(somoor)	0	0	0	0	0	0	0	0	0				+	0	0	0	0	0	0	0	0 0	0 0	0	0
55 312 Bačka Palanka-Gajdobra	lobra	0	0	0	0	0	0	0	0	0	_	-	0 0	H	0	0	0	0	0	0	0	0	0	0	0



Parison of Communication Com		lays	avean	ş	7	_	-	_	_	_	_	-	-	-	_		_	_	_	_	_	_	-	_	_	-		اليوا
Polices Interpretation Interpretat		ation disp								9	9	9	9		9	9				9			0	0	9	0		0
Polices Interpretation Interpretat		ıl inform	sysiqsib noinsmnolnl	bc	99	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	76
Polices Interpretation Interpretat		ger visua	Control desks	bcs	55	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
Polytec digital principal polytec principal po		Passen	Number of stations	bcs	54	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	14
Perices for reconding of transmitted Perices for reconding of transmitted Perices for reconding of transmitted of transmitted Perices for reconding of transmitted			Motor electric generator units	bcs	53	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
Perices for reconding of transmitted Perices for reconding of transmitted Perices for reconding of transmitted of transmitted Perices for reconding of transmitted		devices	Сопуенега	bcs	52	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Perices for reconding of transmitted Perices for reconding of transmitted Perices for reconding of transmitted of transmitted Perices for reconding of transmitted		rer supply	Retifiers	bcs	51	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	379
Parkes for recording of frasement Parkes for recording of frasement Parkes for recording of frasement Parkes for recording of frasement Parkes for recording of frasement Parkes for recording of frasement Parkes for recording of frasement Parkes for recording of frasement Parket P		Pov	Acummulator batteries	bcs	90	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	328
Parker for recording of framework Parker for recording of fram			For outdoor installation	bcs	49	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	18
Perice for recording of transmitted Perice for recording of transm	S	iones	noisillatani 100bni 107	bcs	48	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	86
Perices for recording of transmitted asteroids Perices for recording of transmitted Perices for transmi	DEVICE	Interpl	Ілістрілопе ехсілапде ипітя	bcs	47	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	9
Perices for recording of transmitted asteroids Perices for recording of transmitted Perices for transmi	ICATION		Number of stations	bcs	46	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6
Perices for recording of transmitted asteroids Perices for recording of transmitted Perices for transmi	INDMINO		Microphone console	bcs	45	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	76
Perices for recording of transmitted asteroids Perices for recording of transmitted Perices for transmi	TELEC	ices	Speakers	bcs	44	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1886
Perices for recording of transmitted statements Perices for recording of transmitted Perices displaying accurate time statements Perices for recording of transmitted Perices for providing provided providing prov	ОТНЕ	PA dev	srəñilqmA	bcs	43	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	183
Periese for recording of transmitted Periese for recording of transmitted Periese for recording of transmitted Periese displaying accurate time statements			Number of statons	bcs	42	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	29
Povice for recording of transmitted statements Povice for recording of transmitted statements			Auxiliary clocks	bcs	41	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	941
Povice for recording of transmitted statements Povice for recording of transmitted statements		urate time	Impulse regenerators	bcs	40	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	178
Povice for recording of transmitted statements Povice for recording of transmitted statements		laying acc	Master clocks	bcs	39	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	101
Povice for recording of transmitted statements Povice for recording of transmitted statements		vices disp	Clock exchange units	bcs	38	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
RAIL.WAY LINE RAIL.WAY LINE (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Mist (ind kolosek) (Horian-Mist (ind kolosek) (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Raspat Raža-Patrika Raža-Semska Raža (Horian-Raspat Raža-Raspat		De	Number of stations	bcs	37	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	94
RAIL.WAY LINE RAIL.WAY LINE (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Mist (ind kolosek) (Horian-Mist (ind kolosek) (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Raspat Raža-Patrika Raža-Semska Raža (Horian-Raspat Raža-Raspat		mitted	2+ channels	bcs	36	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
RAIL.WAY LINE RAIL.WAY LINE (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Mist (ind kolosek) (Horian-Mist (ind kolosek) (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Raspat Raža-Patrika Raža-Semska Raža (Horian-Raspat Raža-Raspat		ng of trans	16 channels	bcs	35	0	0	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	ıo
RAIL.WAY LINE RAIL.WAY LINE (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Mist (ind kolosek) (Horian-Mist (ind kolosek) (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Raspat Raža-Patrika Raža-Semska Raža (Horian-Raspat Raža-Raspat		or recordii stateme	12 channels	bcs	34	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	vo
RAIL.WAY LINE RAIL.WAY LINE (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Ruma)-Rasp Donia Borina-Zvornik Grad (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Richata-Bantsko Arandelovo (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Ujina)-RaspA-RaspB-Gasenovo) (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Požareva-)-Rasput Sopt PožKostolac (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Selens (Horian-Mist (ind kolosek) (Horian-Mist (ind kolosek) (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Neuska-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Sant Popovac (Horian-Raspat Raža-Semska Raža (Horian-Raspat Raža-Patrika Raža-Semska Raža (Horian-Raspat Raža-Raspat		Devices fo	8 channels	bcs	33	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	16
\[\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \					2				116 Sečanj-Jaša Tomić				$\overline{}$		322 Markovac-Resavica					(06 Kikinda-MKS (ind.kolosek)				-		12 Surčin-Jakovo-Bečmen-(Boljevci)	(13 (Bgd spoljna)-km 2+290-Fabrika šećera	Total:
Tri tatatatatalminicialminiminiminiminicipipinimini				No	1	46 31	52 31	60 31	71 31	81 31	67 31	78 31	48 32	70 32	63 32	66 32	53 40	80 40	59 40	61 40	58 40	72 40	73 40	79 41	68 41	77 41	57 41	



Aliza Complex	km km b b b b b b b b b b b b b b b b b	17 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	10,000 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	A A A A A A A A A A	Analogue telephone (spe pes type of 2 12 2 12 3 4 4			ph type 18 iskra iskra AUSO UTB ISKRA siemens-WT100 EI iskra iskra iskra iskra	1 15 siemens siemens siemens 5 1 16 1 16 1 17 17 17 17 17 17 17 17 17 17 17 17 1	\$/NPN 7	Digital Press Albitivs 8 Mbitivs 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Digital telephone Digi	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Sanil beathavo ariw-owT	n n 1661 168 168 168 168 168 168 168 168 16			Z3 F E Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z	Up to 12 channels Z Z Z Z Z Z Z Z Z								
km km 3 4 0 0	160611688188888888888888888888888888888			10 10 10 10 10 10 10 10	Uppe 12 212					 			
3 4 4 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	168 168 857 779 388			23 Z3F EE EE ESSF EE E	12 212 212 212 212 212 712 VZ12k Ausso 212 212 212								
2,000 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	168 168 179 179 188 188			z 3	Z12 Z12 Z12 Z12 FPD12 Z12 VZ12k Ausso Z12 Z12 Z12								
5,000 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	887			Z3F Z3F Z3F Z3F	Z12 Z12 FPD12 Z12 VZI2k Ausso Z12 Z12 Z12								
2,000 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	79			Z3F E1 E3 E3 E3 E3 E3 E3 E3 E3 E3 E3 E3 E3 E3	Z12 FP012 Z12 VZ12k Ausso Z12 Z12 Z12 Z12 Z12								
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	288			Z3F E1 E1 Z3F	FPD12 Z12 VZ13k Ausso Z 12 Z 12 Z 12				- 		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
r. 2,00 0 0 r	388			23F EI 23f	VZ12k Ausso Z 12 Z 12				 		0 0 0 0 0 0 0 0 0 0 0 0 0		
r. 2,00 0 r. 0 0 0 r. 0	88			Z3F E1 E23f	Ausso Z 12 Z 12 Z 12						0 0 0 0 0 0 0 0 0 0 0 0		
rr. 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	888			E1 23f	2 12 2 12				90000000	0 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0		
Resnik 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				23f	Z 12	0 0 0 0 0 0 0 0 0 0		iskra iskra iskra	0 0 0 0 0 0 0		0 0 0 0 0 0 0 0 0 0		
Cesnik 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0							 	iskra iskra iskra	000000		0 0 0 0 0 0 0 0 0		
Cesnik 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0							+++++++	iskra iskra iskra					
Aesnik 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0								iskra	0000				
Aesnik 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0						0 0 0 0 0 0		iskra	0 0 0	000000	0 0 0 0 0 0	0 0 0 0 0 0 0	0 0 0 0 0 0 0
-Resnik 0 0 0 ()						0 0 0 0 0 0	++++++	iskra	0 0	00000	0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0 0
0 0 0						00000			0 (0000	0 0 0 0	0 0 0 0 0	0 0 0 0 0 0
		\sqcup				0000				000	000	0000	
						000	+++		0 0	00	0 0	0 0 0	
sovica		0	22			00	+++		0 -	0	0	0	0 0 0
0 0				0	0	•	Н		0	,		0	0 0
ajinci 0 0	0 2,	2,130 0			0	0			0	0	0		0
0 0	0	0 0		0		0	+		0	0	0	0	2 0
Tope, Blok IObala-Blok 2 prelRas. Pan. Most 0 0 0 0 0	0 0	+	0	0	0 0	0 0	0 0		0 0	0 0	0	0	0 0
kov) 0 0	0 0	+			0	0 0	+		0 0		0 0	0 0	
0 0	6 0	536 0	H		0	0	H		0	0	0	0	0 0
nžirna-Sajlovo Rasp. 0 0	2,000		2,700		0	0	H		0	0	0	0	0 0
Obilazni kolosek Mala Krsna 0 0 0	0					0	0 0		0	0	0	0	0 0
Lapovo 0 0				0		0	H		0	0	0	0	0 0
durovo	0 0	0 0	0	0	0	0	0 0	iskra	- 0	0	0	0	0 0
	-	7	31			0 0						0	
	0	_			0	0	0 0		0	0	0	0	0 0
0	0	-		0	0	0	0 0		0	0	0	0	0 0
Pančevo Glavna-Zrenjanin-Kikinda-State Border. 0 2,65 41,2	1,5		4,	0	0	0	0 0		0	0	0	0	0 0
Banatsko Miloševo-Senta-Subotica 0 0 0	0	0 0	1,660	Kt3-1 0	0	0	0 0		0	0	0	0	0 0
Pančevo Varoš-Rasputnica "2a"-(Jabuka) 0 0 0	0	0 0	0	0	0	0	0 0		0	0	0	0	0 0
N.Sad-Sajlovo Rasputnica-Bogojevo 0 29 0	0	2. 7	14,5	0	0	0	0 0		0	0	0	0	0 0
(Tomaš) 0 0	0	0 0		0	0	0	Н		0	0	0	0	0 0
0 0			0	0	0	0	0 0		0	0	0	0	0 0
0 0		+		+	0	0	+		0	0	0	0	0 0
a Borina-State Border. 0 0		+	+	73F	+	0 0	+		0	0	0 0	0	0 0
		+	17	167	717		+				0	0	
M. Kreine, Born Daeumtenion 1911 (Virolporeman)	0	4,02						en doi	0 -			0	
			17	735				in the same					
			t	JC7	0		+	ISNIA		0	0	0	
strat-Kosovo Polje		+	1		0 0	0 0	+		0 0		0	0 0	0 0
0 0	0 0	0		0	0 0	0 0	+		0	0	0	0	0 0
(Dariovo)-Kasputnica 1 -Kursumilja 0 0 0 0		+			0		0 0				0		0 0
						0	+			0	0 0	0	0 0
25 204 Movi Sod Movi	0										0		



MULTI-CHANNEL DENCES Maria Г	Г	In-ground amplifiers	bcs	27	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Control lines Control line			200 000	-	26 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Control lines Control line				-	Н	H	Н			Н	_	_		Н	Н				H			_	Н	_	_	_		_	Н	Н	0		Н	0	0
Configuration Configuratio		I telephone	sylidivi eet																																
Continue Continue		Digita	s/tidM 8	_		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Complete Complete					21	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FALLWAY LINE Trop wite overhead lines CARLE SYNTIANS CARLE SALLWAY LINE CARLE STATE CARLE SALLWAY LINE SVICES		s\idM 2		20																															
FALLWAY LINE Trop wite overhead lines CARLE SYNTIANS CARLE SALLWAY LINE CARLE STATE CARLE SALLWAY LINE EL DE			bcs	19	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	31	
Could lines Could lines	MULTI-CHANN		Передојот	type	18																														
Comparison Com			In-ground amplifiers	bcs	17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
Note Particular Service			Above ground amplifiers	bcs	91	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	20
CABLE SYSTEMS FAILWAY LINE CABLE SYSTEMS FAILWAY LINE CONTRICT CABLE SYSTEMS FAILWAY LINE CONTRICT CABLE SYSTEMS FAILWAY LINE STEMS FAILWAY LINE SYSTEMS FAILW		le le	S12111111112 Z.I. 12.I.O.	bcs	15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	∞
CABLE SYSTEMS FAILWAY LINE CABLE SYSTEMS FAILWAY LINE CONTRICT CABLE SYSTEMS FAILWAY LINE CONTRICT CABLE SYSTEMS FAILWAY LINE STEMS FAILWAY LINE SYSTEMS FAILW		ephor	slameda 51 194O	type	14																														
CABLE SYSTEMS FAILWAY LINE CABLE SYSTEMS FAILWAY LINE CONTRICT CABLE SYSTEMS FAILWAY LINE CONTRICT CABLE SYSTEMS FAILWAY LINE STEMS FAILWAY LINE SYSTEMS FAILW		ue tel		bcs	13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	28
CABLE SYSTEMS Checked lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead coolines Coerthead coolines Coerthead coolines Coerthead coolines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead lines Coerthead coolines Coerthead lines Coerthead coolines Coerthead lines Coerthead line		Analog	Up to 12 channels	L	12																														
Control lines Cable lines Cable lines Cable lines			nb to c cusuucis	-	Ξ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
CABLE SYSTEMS Cable lines CABLE SYSTEMS Cable lines CABLE SYSTEMS Cable lines Cable li				type	10															S. 3															Ш
Controlled Con			Гося	km	6	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Н
CABLE SYSTEMS Control of the con		lines	Fiber optic	km	œ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	72,950
Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Steinter Charles Coverhead lines Souther-Respired House-Respired House-Re	TEMS	Cable	ATS	km	7	0	0	0	0	0	0	0	0	0	0	0	0	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	507,024
South-Apatin fabrika-Strike-Sombory 13 South-Apatin fabrika-Strike-Sombory 14 Sidestandard-Rasput "3"-Rasput "3"-(Raci) 15 South-Apatin fabrika-Strike-Sombory 16 South-Apatin fabrika-Strike-Sombory 17 South-Apatin fabrika-Strike-Sombory 18 South-Apatin fabrika-Strike-Sombory 19 South-Apatin fabrika-Strike-Sombory 19 South-Apatin fabrika-Strike-Sombory 19 South-Apatin fabrika-Strike-Sombory 10 0 0 0 0 0 0 0 0			STKA	km	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1041,453
RAILWAY LINE Rail Rail Rail Rail Rail Rail Rail Rail		200	Overhead cables	km	5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	263,142
RAILWAY LINE		Overhead 1	Two wire overhead lines	km	4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Н
13 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1			Two-wire overhead lines SiBr	km	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2,000
II					2	5 Podbara-Rasput, "3"-Rasput, "2"-(Kač)	6 (Rim.Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	8 Vrbas-Sombor		0 Sonta-Apatin fabrika-Strilić-(Sombor)		2 Bačka Palanka-Gajdobra			5 Kikinda-Banatsko Arandelovo			8 Pančevo Varoš-Pančevo Vojlovica				2 Markovac-Resavica		3 Alibunar-Seleuš	4 Vladimirovac-Kovin	5 Čoka-Novi Kneževac	6 Kikinda-MKS (ind.kolosek)				0 (Višnjićevo)-Rasput.Rača-Sremska Rača	1 Paraćin-Stari Popovac	2 Surčin-Jakovo-Bečmen-(Boljevci)	3 (Bgd spoljna)-km 2+290-Fabrika šećera	
33 42 43 43 43 43 43 43 43 43 44 43 45 43 47 43 43 43 44 43 45 43 47 43 47 43 48 43 49 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 40 43 41 43 42 43 43 44 44 44 45 44 46 44 47 44 48 44 49 44 40 44 40 44 40	L		oV sinc No	Rai	8 3	305	306	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	403	404	405	406	407	408	409	410	411	412	413	
				οN	_	37	45	33	69	74	54	55	46	52	09	71	81	29	78	48	20	63	99	53	80	65	61	28	72	73	62	89	17	57	



			Š						RAD	IO DE	VICE						
			Loc	omotive radio c		ching		Traffic	running	g netwo	rks (2m)	Sta	tion rad	lio netw	orks (0	,7m)
	Railway line No	RAILWAY LINE	Exchange units (with railway line splitter)	Length of covered railway line	Trackside stations	Locomotive stations	Number of networks	Radio link	Repeaters	Fixed stations	Mobile stations	Movable stations	Number of networks	Repeaters	Fixed stations	Mobile stations	Movable stations
2 1	Ra	2	pcs 28	km 29	pcs 30	pcs 31	pcs 32	pcs 33	pes 34	pes 35	pcs 36	pcs 37	pcs 38	pcs 39	pcs 40	pcs 41	pcs 42
5		BGD-Šid-State Border	1	100	8	0	0	0	0	0	0	0	8	0	8	0	21
3		BGD-Mladenovac-Niš-Preševo-State Border. (BGD)-Rakovica-Jajinci-M.Krsna-V.Plana	3	377 100	42 12	8	0	0	0	0	0	0	17	0	19	0	53 3
2 22		(BGD)-S.Pazova-Indija-Subotica-State Border. Niš-Dimitrovgrad-State Border.	0	155 0	10	4	0	0	0	0	0	5	7	1	16	0	74 12
6		BGD Centar-Pančevo-Vršac-State Border.	0	20	4	0	1	0	1	13	0	4	4	0	4	0	11
20	107 108	(BGD)-Resnik-Podgorica-Bar Lapovo-Kraljevo-Đ.Janković-State Border.	0	176 0	35 0	0	0	0	0	0 16	0	0	0	0	13	0	35 0
26	109	Subotica-Bogojevo-State Border.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7		Beograd Centar-Novi Beograd BGD Centar-Rasputnica"G"-(Rakovica)	0	10	2	164	0	0	0	0	0	0	0	0	0	10	0
15	112	BGD Ranžirna "A"-Ostružnica-Batajnica	0	20	2	0	0	0	0	0	0	0	0	0	0	0	0
14		BGD Ranžirna."B"-Ostružnica BGD Ranžirna "A"-Rasp."B"-Rasp."K"-Resnik	0	20	3	0	0	0	0	0	0	0	0	0	0	0	0
25 10	115	Ostružnica-Rasp."B"-(Rasp."K"-Resnik) BGD Ranžirna "B"-Rasp."R"-Rasp."A"	0	0	0	0	0	0	0	0	0	0	6	0	0	0	0 19
11	117	(BGD Ranžirna "B")-Rasp."R"-Rakovica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9		(BGD)-BGD Ranžirna "A"-Rasp."T"-Rakovica BGD Ranžirna "B"-Rasputnica "T"-(Rakovica)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16	120	(BGD Ranz."A"-Ras.B)-Ras.K-Ras.K1-Jajinci	0	0	0	0	0	0	0	0	0	0	3	0	5	1	12
29 28		Topčider-Rasp.Savski Most-(Novi BGD) TopčBlok 1Obala-Blok 2 prelRas.Pan.Most	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
27	123	(Topč)-Blok 1Obala-BGD Spoljna-Blok 2 prel	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
31 19		(Vukov Sp.)-Ras.K.Park-Ras.Dedinje-(Rakov.) Inđija-Golubinci	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
24 41		N.Sad-N.Sad Ranžirna-Sajlovo Rasp. Obilazni kolosek Mala Krsna	0	0	0	0	0	0	0	0	0	0	4	0	4 0	0	11
21	128	Lapovo Varoš-Lapovo Ranžirna-Lapovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
30 17		Trupale-Niš Ranžirna-Međurovo Crveni Krst-Niš Ranžirna	0	0	0	0	0	0	0	0	0	0	5	0	8	2	0 19
23	131	Niš-Rasputnica Most-(Niš Ranžirna)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18 51	132 201	(Cr.Krst-Skr.2)-Skr.3-Skr.4-(Ćele Kula) Subotica-Horgoš-State Border.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
43		Pančevo Glavna-Zrenjanin-Kikinda-State Border.	0	0	0	0	1	0	2	11	0	2	0	0	0	0	0
32 44		Banatsko Miloševo-Senta-Subotica Pančevo Varoš-Rasputnica "2a"-(Jabuka)	0	0	0	0	0	0	0	8	0	6	0	0	0	0	0
39 40		N.Sad-Sajlovo Rasputnica-Bogojevo (N.Sad)-Sajl.RaspR.ŠančOrl.staj(Tomaš)	0	0	0	0	0	0	0	0 18	0	0	0	0	0	0	0
38	207	N.Sad Ranžirna-Sajlovo Rasputnica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
42	208	Orlovat-Rasputnica "1a"-(Lukićevo) Ruma-Šabac-Rasp.Donja Borina-State Border.	0	0	0	0	1	0	0	8	0	2	2	0	0	0	5
50	211	Stalać-Kraljevo-Požega	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
49 34		Smederevo-Mala Krsna M.Krsna-Bor-Rasputnica "2"-(Vražogrnac)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	12 0
35 64		Niš-Zaječar- Prahovo pristanište (Niš)-Doljevac-Kastrat-Kosovo Polje	0	0	0	0	0	0	0	14 0	0	4	3	0	0	0	5
	219	Kuršumlija-Kastrat	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
56 76		(Barlovo)-Rasputnica "1"-Kuršumlija Subotica-Subotica fabrika	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
75	302	Subotica-Subotica bolnica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
65 36		Kanjiža-Horgoš Novi Sad-Novi Sad ložionica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
37 45		Podbara-Rasput. "3"-Rasput. "2"-(Kać) (Rim.Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
33	308	Vrbas-Sombor	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
69 74		Petrovaradin-Beočin Sonta-Apatin fabrika-Strilić-(Sombor)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
54	311	Bač-Karavukovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
55 46	313	Bačka Palanka-Gajdobra (Ruma)-Rasp.Donja Borina-Zvornik Grad	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
52 60	314	Sid-Sremska Rača Nova-State Border. Kikinda-Banatsko Aranđelovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
71	316	Sečanj-Jaša Tomić	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
81 67		(Zrenjanin)-Zrenjanin fabr.Vršac-Bela Crkva Pančevo Varoš-Pančevo Vojlovica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
78	319	(Uljma)-RaspA-RaspB-(Jasenovo)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
48 70		Senta-Odvojna skr. 22 Senta (Požarevac)-Rasput.Sopot PožKostolac	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
63	322	Markovac-Resavica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
66 53		Ovča-Padinska Skela Alibunar-Seleuš	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
80 59	404	Vladimirovac-Kovin Čoka-Novi Kneževac	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
61	406	Kikinda-MKS (ind.kolosek)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
58 72		Bogojevo-Dunavska obala Sombor-Bački Breg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
73	409	Sombor-Ridica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		(Višnjićevo)-Rasput.Rača-Sremska Rača Paraćin-Stari Popovac	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
77 57	412	Surčin-Jakovo-Bečmen-(Boljevci) (Bgd spoljna)-km 2+290-Fabrika šećera	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
31	413	(Bgd spoijna)-km 2+290-rabrika secera Total:	9	996	122	176	8	2	11	89	4	27	83	6	95	20	298
								-									



Appendix 3.8. List of service points where it is possible to perform the transshipment of dangerous goods

The user or the authorized person is liable for safe transshipment and provision of required permits for transshipment issued by the competent authorities (ministry, local self-government, etc.) in case such permits are prescribed by law or by-laws. The Infrastructure Manager is not obliged to control permits and approvals issued by the competent authorities. In case of an accident during transshipment, the user or authorized person undertakes all necessary measures for making handling point functional.

Transshipment of the respective dangerous goods may be carried out on the handling point (handling area, ramp), i.e. the facility placed beside the track referred to in column 3, Table 1 of this Appendix. Transshipment shall be performed in compliance with the applicable regulations of the Republic of Serbia in the field of transport of dangerous goods, health and safety at work, environmental protection, waste treatment, fire protection, etc., complying with the essential safety measures which shall be provided as follows:

Keeping, disposal and storage of dangerous goods in the area of service point, including handling point is prohibited.

The handling point where transshipment is carried out must be enclosed or in any other way separated from passenger transport or from the handling point (loading, unloading, transshipment) with the goods not classified as dangerous (not RID). If a handling point is not enclosed, the client must mount movable fence which shall be removed upon handling (made of plastic orange material used in construction).

The handling point where transshipment is carried out shall have "RID – warning plate on the handling point". In case an IŽS' service point, within which there is the place of handling with dangerous goods, does not have "RID – warning plate on the handling point", the user of the handling point (consignee, consignor or authorized person) is obliged to provide the said plate at their own expense during the entire period of handling. The plate shall be made of sheet, with red colour base, on which the text with white letter is inscribed. The text shall read: RID WARNING – HANDLING WITH DANGEROUS GOODS. Minimum plate size is 600x500 mm. The plate shall look like as indicated:

RID WARNING HANDLING WITH DANGEROUS GOODS

Transshipment of the dangerous goods is carried out during the visible part of day, but it may be performed at night, with electrical lighting whereby the electrical devices that cannot cause fire or explosion may be used. In case an IŽS service point, within which there is the point of handling with dangerous goods does not have capacity for electrical lighting, the user of the handling point shall be obliged to provide necessary lighting at their own expense during the entire period of handling.

In case that said track is under OCL, during transshipment the voltage must be turned off and the track shall be secured in a duly manner.

Road vehicle engine shall be turned off during transshipment.

The disposal of the flammable and material which may cause or intensify fire is prohibited. Furthermore, it is forbidden to dirty the handling area with oil or oil derivatives (out of road freight vehicle).



Fire lighting or work with any open flame, use of tools which sparks and the devices with burner as well as smoking are forbidden during transshipment.

The user of the handling point (consignee, consignor or the authorized person) is obliged to perform cleaning and remove waste, which has been generated during the process of handling with dangerous goods, to the dumpsite, upon the completion of handling activities, in accordance with the Law on Waste Management, Law on Environmental Protection and other legislation and bylaws in the field of environmental protection. In case the user of authorized person does not clean the area after transshipment and does not take waste to the respective dumpsite outside the station, the railway undertaking shall perform cleaning.

The user of the handling point is obliged that, in the process of handling with dangerous goods, comply with the Law on Transport of Dangerous Goods and Law on Protection at Work (to take care on safety and health at work of their employees on the handling point), and particularly to get them acquainted, in a proven manner, with the hazards of stay in railway area (general safety of movement in IŽS's service points, way of conduct in service points, restrictions in movement, hazards from high voltage and other hazards).

Simultaneous transshipment at the same place of handling with dangerous goods of different classes is forbidden.

The service points where transshipment of certain dangerous goods from railway wagons into road vehicle and vice versa is performed are given in the Table of this Appendix.

Upon the request of the interested parties, Infrastructure of Serbian Railways JSC may approve transshipment of other dangerous goods, as well as in service points not given in the Table of this Appendix, in case there are conditions met for handling in the service point, and if the approval of the competent authority is provided for the goods that are being transshipped if it is prescribed by the law (ministries, local self-government units, , i.e. the Ministry of Interior's services).

For more information please contact:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina St., 11000 Belgrade, Serbia Phone/Fax:+381 11 36 18 214 E-mail:sektor.sp@srbrail.rs

The table consists of 7 columns, with the following content:

- column No 1 ,,ordinal No";
- column No 2 , Name of a service point";
- column No 3 "Track", contains ordinal number or name of track in accordance with Station regulations (transport dispatching point or loading point);
- columns 4, 5 and 6 "Dangerous goods", contain NHM code, UN item/number for indication of hazards and class of dangerous goods, whose transshipment may be carried out;
- column No 7 ,,Notes", contains specific information relating to specific boxes.

Table: List of service points open for transshipment of dangerous goods

			Dangerous goo	ds		
No	Name of service point	Track	NHM	UN / number for hazards indication	Class	Notes
1	2	3	4	5	6	7
1.	Adrovac	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	



			3105 20	2067/50	5.1	
2.	Aleksinac	1	3102 30	1942/50	5.1	
			3105 20	2067/50	5.1	
3.	Bagrdan	6	3102 30	1942/50	5.1	
,	D XI T I	1.5.7	3105 20	2067/50	5.1	
4.	Bačka Topola	1, 5, 7	3102 30	1942/50	5.1	
5.	Bor Freight	1	3105 20	2067/50	5.1	
J.	Doi 11cignt	1	3102 30	1942/50	5.1	
6.	Valjevo	II line	3105 20	2067/50	5.1	
	3		3102 30	1942/50	5.1	
7.	Velika Plana	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
			3102 30	2067/50	5.1	
8.	Vranje	1	3102 30	1942/50	5.1	
			3105 20	2067/50	5.1	
9.	Vršac	11, 19	3102 30	1942/50	5.1	
10	Crainš	1	3105 20	2067/50	5.1	
10.	Grejač	1	3102 30	1942/50	5.1	
11.	Žednik	1, 6a	3105 20	2067/50	5.1	
11.		,	3102 30	1942/50	5.1	
12.	Zmajevo	5	3105 20	2067/50	5.1	
			3102 30	1942/50	5.1	
13.	Zrenjanin	1, 10	3105 20 3102 30	2067/50	5.1	
			3102 30	1942/50 2067/50	5.1 5.1	
14.	Zrenjanin Factory	1	3103 20	1942/50	5.1	
			3105 20	2067/50	5.1	
15.	Jagodina	1, 8	3102 30	1942/50	5.1	
16	Kikinda	20, 21	3105 20	2067/50	5.1	
16.	Kikinda	20, 21	3102 30	1942/50	5.1	
17.	Kula	1	3105 20	2067/50	5.1	
	Truit	1	3102 30	1942/50	5.1	
18.	Lapovo	1	3105 20	2067/50	5.1	
		Ctatian fam	3102 30	1942/50	5.1	
19.	Lapovo marshalling yard	Station for disinfecting	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
		New track	3102 30	2067/50	5.1	
20.	Leskovac	THOW HACK	3103 20	1942/50	5.1	
2.1	T > 1		3105 20	2067/50	5.1	
21.	Lešak	1 short	3102 30	1942/50	5.1	
22.	Mala Krsna	1	3105 20	2067/50	5.1	
۷۷.	iviaia ixisila	1	3102 30	1942/50	5.1	
23.	Mladenovac	1, 7	3105 20	2067/50	5.1	
ļ		, ,	3102 30	1942/50	5.1	
			3105 20	2067/50	5.1	
			3102 30 2807 00	1942/50 1830/80	5.1 8	
		2, 3, 4, 7	2806 10	1789/80	8	
24.	Novi Sad Marshalling	Locomotive and	2815 12	1824/80	8	
],	Yard	freight stations	2808 00	2031/80	8	
			2809 20	1805/80	8	
			2815 11	1823/80	8	
			2828 90	1791/80	8	
25.	Ostružnica	1	3105 20	2067/50	5.1	
			3102 30	1942/50	5.1	
26.	Palanka	1	3105 20	2067/50	5.1	



		•			1	•
			3102 30	1942/50	5.1	
27.	Pančevo varoš	1	3105 20	2067/50	5.1	
27.	Pancevo varos	1	3102 30	1942/50	5.1	
20	Pančevo Main St.	20, 21	3105 20	2067/50	5.1	
28.		20, 21	3102 30	1942/50	5.1	
20	Dana film	1	3105 20	2067/50	5.1	
29.	Paraćin	1	3102 30	1942/50	5.1	
20	D'and	1	3105 20	2067/50	5.1	
30.	Pirot	1	3102 30	1942/50	5.1	
21	D - ×	1	3105 20	2067/50	5.1	
31.	Požarevac	1	3102 30	1942/50	5.1	
			3105 20	2067/50	<i>5</i> 1	
32.	Požega	19	3102 30	2067/50	5.1	
			3102 30	1942/50	5.1	
22	D.: 1: E : 1:	12	3105 20	2067/50	5.1	
33.	Prijepolje Freight	13	3102 30	1942/50	5.1	
24	Doolar 12	1	3105 20	2067/50	5.1	
34.	Prokuplje	1	3102 30	1942/50	5.1	
25	Resavica	Right dead-end	3105 20	2067/50	5.1	
35.		track	3102 30	1942/50	5.1	
26	ъ	1.0	3105 20	2067/50	5.1	
36.	Ruma	1, 2	3102 30	1942/50	5.1	
27	Svilajnac		3105 20	2067/50	5.1	
37.		1	3102 30	1942/50	5.1	
20	Senta	1, 10,11	3105 20	2067/50	5.1	
38.			3102 30	1942/50	5.1	
20	Sombor	20, 21	3105 20	2067/50	5.1	
39.			3102 30	1942/50	5.1	
40	Sremska Mitrovica	1,9	3105 20	2067/50	5.1	
40.			3102 30	1942/50	5.1	
11	Stalać	1 short track	3105 20	2067/50	5.1	
41.			3102 30	1942/50	5.1	
42.	Subotica	1, 33, 34 and 36	3105 20	2067/50	5.1	
42.		freight station	3102 30	1942/50	5.1	
43.	Ćićevac Ćuprija	1	3105 20	2067/50	5.1	
43.			3102 30	1942/50	5.1	
44.			3105 20	2067/50	5.1	
44.			3102 30	1942/50	5.1	
45.	Užice Freight	1	3105 20	2067/50	5.1	
43.		1	3102 30	1942/50	5.1	
46.	Čačak	1-dead-end track	3105 20	2067/50	5.1	
+∪.	Cacak	1-ucau-chu hack	3102 30	1942/50	5.1	
47.	Šabac	1,7	3105 20	2067/50	5.1	
		*	3102 30	1942/50	5.1	
48.	Stara Pazova	7	3102 30	1942/50	5.1	
49.	Kruševac	1	3105 20	2067/50	5.1	
4 ₹.		1	3102 30	1942/50	5.1	
50.	Vrbas	10,11	3105 20	2067/50	5.1	
51.	Bajmok 1	1	3105 20	2067/50	5.1	Only for goods
J1.		1	3102 30	1942/50	5.1	in sacks
52	Futog	1	3105 20	2067/50	5.1	
52.			3102 30	2007/30	5.1	



Appendix 3.9. Alternative transport routes

No	Regular route	Distance (km)	Alternative route	Distance (km)
1	Subotica-Novi Sad	98.5	Subotica-Sombor-Vrbas-Novi Sad	150.5
2	Subotica-Novi Sad	98.5	Subotica-Sombor-Bogojevo-Novi Sad	165.4
3	Subotica-Novi Sad	98.5	Subotica-Zrenjanin-N.Sad	230.6
4	Subotica-Belgrade	175.6	Subotica-Zrenjanin-Pančevo- Belgrade	234.6
5	Novi Sad-Belgrade	77.1	Novi sad-Orlovat-Pančevo-Belgrade	148
6	Kikinda-Subotica	96.4	Kikinda-Orlovat-N.Sad-Subotica	271
7	Belgrade-Lapovo	109.6	Belgrade-Požega-Kraljevo-Lapovo	306.1
8	Belgrade-Lapovo-Kraljevo	194.3	Belgrade-Požega-Kraljevo	221.4
9	Belgrade-Niš	243.5	Belgrade-Požarevac-Zaječar-Niš	372.9
10	Belgrade-Požega	154.9	Belgrade-Lapovo-Kraljevo-Požega	260.8
11	Belgrade-Požega-Vrbnica(ŽCG)	299.3	Belgrade-Lapovo-Kraljevo-Požega- Vrbnica(ŽCG)	405.2
12	Belgrade-Smederevo	83.1	Belgrade-Mladenovac-V.Plana- Smederevo	132.8

Note: For departure/terminal station the names of the nodes are given, and various service points may be comprised within the respective node.



Appendix 3.10. Facilities for rolling stock maintenance

Maintenance of railway vehicles is performed in accordance with the Rulebook on Railway Vehicle Maintenance ("Official Gazette of RS", No 144/20).

Service facilities for provision of the basic services- where the works on the maintenance of vehicles are executed, and which are not carried out regularly as the part of daily activities requiring the vehicle to be detached from traffic are the organizational units of the other companies and Infrastructure of Serbian Railways JSC does not provide this type of services.

In accordance with the available data, service facilities and basic maintenance services provided by the Joint Stock Company for Passenger Railway Transport "Srbijavoz", Belgrade are as follows:

Location	Address	Facility	Primary Purpose	Basic Information
	Milana Rešetara bb	Depot Zemun	Maintenance of electric rolling stock and passenger coaches	Area: 10.200 m2 6 tracks of unit length 220 m
Zemun		Depot for underfloor wheel lathe	Wheel processing of rolling stock	Area: 350 m2 It has underfloor wheel lathe without dismantling of wheel-sets
		Workshop	Regular maintenance of electric and diesel locomotives	Area: 85 m2 Disposes of service canal of 36m and platform but without a canopy
Lapovo	Lava Tolstoja 10	Maintenance depot	Maintenance of electric and diesel locomotives and motor trains	Area: 1.part 1088 m2 and second part 625 m2 It has two running lines 2 out of which there are two canals on one line in the length of 50m and 20m. It disposes of single-axle weighbridge for measuring and adjusting the axle load of the rolling stock.
Sombor	Braće Miladinom 1	Hangar Depot for	Maintenance of DMUs, and may be used for maintenance of freight wagons and diesel locomotives	Area:1337,5 m2 It has two tracks of the length 78 m and 24 m; it disposes of underfloor wheel lathe for wheel processing on rolling stock without dismantling. Area: 687 m2
		railbuses		has 1 track in the length of 78 m
Zrenjanin	n Dr Vase Stajica 2	Depot for railbuses	Maintenance of railbuses and replacement of wheel-sets of 711 DMUs	Area: 277 m2 1 canal in the length of 27 m
Zivijaiiii		Depot for DMUs	Maintenance of DMUs	Area: 432 m2 1 track in the length of 34 m
Vršac	Pavliški put bb	Depot for maintenance of rolling	Inspections and extraordinary repairs of smaller scope on diesel traction units and	Area: 787 m2 Two tracks in the length of 40 m



		stock	DMUs, as well as the overhauls of freight wagons	
Zaječar	Železnička bb	Workshop for repair of locomotives	Maintenance of diesel traction units and freight wagons	Area: 1250 m2 4 track out of which two are, unit length- 50 m

For more information on the provision of basic services in the above facilities responsible is their user in "Srbijavoz", Belgrade, Department for Rolling Stock Maintenance.

Contact point: Director of Department for Rolling Stock Maintenance - Mr. Vladan Petrović

Address: 6 Nemanjina St. 11000 Belgrade, Serbia

E-mail: vladan.petrovic@srbrail.rs

Phone: +381 64 845 22 64

Information on the service facilities and services provided by the Joint Stock Company for Freight Railway Transport "Srbija Kargo", are available on the web-site: http://www.srbcargo.rs/rs/usluzni-objekti. Information on the service facility and services provided by Šinvoz is available on the website www.sinvoz.rs.



SR PNEUMATIK

23000 ZRENJANIN, MANASTIRSKA BR. 13A PIB:101165889 MBR:54681496 TEL: 062/268-128, pneumatik.zrenjanin@gmail.com

INFORMACIJA O USLUŽNOM OBJEKTU SR PNEUMATIK ZRENJANIN

ZRENJANIN, april 2024




		. Opšte informacije
1.1.	Uvod	SR Pneumatik Zrenjanin je uradio Informaciju o uslužnom objektu na osnovu odredbi Pravilnika o elementima informacije o uslužnom objektu (Sl.glasnik RS broj 66/2019) Naziv uslužnog objekta je objekat za održavanje I spade u kategoriju 5, shodno članu 15. St. 2 Zakona o železnici (Sl.glasnik RS broj 41/18) Ova informacija je dostavljena upravljaču infrastrukture radi objavljivanja u Izjavi o mreži.
1.2.	Operator uslužnog objekta	Uslužnim objektom upravlja operator SR Pneumatik Zrenjanin, Manastirska 13a, kontakt Adamov Milivoj +38162268128
1.3	Period važenja I postupak ažuriranja	Ovaj dokumenat se ažurira po potrebi I nema definisan period važenja.
		2. Usluge
2.1.	Naziv usluge	Sertifikovana radionica za održavanje železničkih vozila obavlja usluge: - pregledi P1, P3,P6,P12 lokotraktora, drezina, lokomotiva; - tekuće održavanje (opravke manjeg I srednjeg obima) lokotraktora, drezina, lokomotiva; - kontrolni pregledi I tekuće održavanje obavlja se u depou vlasnika, osim kada je potrebno vozilo dovesti u pogon SR Pneumatik Zrenjanin. - specijalizovana radionica za održavanje kočnice železničkih vozila.
		Opis uslužnog objekta
3.1	Spisak svih postrojenja	Uslužni objekat SR Pneumatik Zrenjanin, sastoji se od sledećih postrojenja na lokaciji Zrenjanin Takovska 104: -radionica za popravku lokotraktora,



		-specijalizovana radionica za održavanje kočnice železničkih vozila. Hala površine 500m2 (zatvorena I grejana), priključak na javnu drumsku mrežu. Radionica raspolaže svom potrebnom opremom, mašinama I alatima neophodnim za popravke I održavanje železničkih vozila u radionici I na terenu. Uslužni objekat SR Pneumatik Zrenjanin na lokaciji "Tatravagonka Bratstvo" doo Subotica, Bikovački put 2 Subotica: - Hala sa kolosekom I svim pratećim alatima I uređajima koji se koriste u procesu održavanja železničkih vozila se koristi na osnovu Ugovora o poslovnotehničkoj saradnji od 29.12.2023. godine.				
		 Hala ima priključak na javnu železničku mrežu. 				
3.2.	Mesto	Zrenjanin, Takovska 104 Subotica, Bikovački put 2				
3.3.	Radno vreme	Radno vreme uslužnog objekta je 7-15 časova ponedeljak-petak, osim za vreme verskih I državnih praznika				
3.4.	Planirane izmene tehničkih karakteristika	Ne planiraju se izmene tehničkih karakteristika				
2000	通信证明	4. Naknade				
4.1.	Informacije o naknadama	Metodologija: norma sat Naknada za pristup uslužnim objektima se ne naplaćuje. Cena za pojedine usluge po norma satu, u zavisnosti od složenosti posla po ponudi,				
		nakon izvršene defektaže.				

5.1.	Pravni zahtevi	Za pristup je potrebno sklapanje ugovora ili narudžbenica.				
5.2.	Tehnički uslovi	Železnička vozila namenjena za rad na koloseku širine 1435 mm I maksimalnog osovinskog opterećenja 22 t.				
5.3.	Samopružanje usluga	Uslužni objekat ne dozvoljava mogućnost samopružanja usluga.				
5.4.	IT sistemi	Uslužni objekat ne nudi korištenje IT sistema				
		6. Dodela kapaciteta				
6.1.	Zahtevi za pristup uslužnom objektu ili uslugama koje se pružaju u objektu	Podnosilac zahteva je dužan poslati zahtev za ponudom za uslugu na e-mail :pneumatik.zrenjanin@gmail.com , ili usmeno na telefon +38162268128 Rok za obradu zahteva je 3 radna dana Prihvatom ponude, usluga se pruža na osnovu ugovora i narudžbenice. Po završetku usluge sačinjava se zapisnik o izvršenim uslugama.				
6.2.	Odgovor na zahtev	Rok za obradu zahteva je 3 radna dana Usluga se temelji na osnovu ugovora, narudžbenice I zapisnika o izvršenoj usluzi.				
6.3.	Informacije o promenama tehničkih karakteristika I privremenim ograničenjima kapaciteta	Uslužni objekat nema privremenih ograničenja kapaciteta koji mogu uticati na rad. U slučaju privremenih ograničenja, obaveštava se upravljač infrastrukture.				



Milivoj Adamov



Information on the service facility MIN Lokomotiva doo



INFORMACIJE O USLUŽNOM OBJEKTU MIN LOKOMOTIVA DOO

MIN Lokomotiva doo

Šumadijska 1, 18000 Niš

+381 18 415 1131

E-mail: min.lokomotiva.kabinet@gmail.com

Internet adresa: https://www.minlokomotiva.rs/

April 2024. godine

114





SADRŽAJ

1.1 UVOD	3
1.2 OPERATOR USLUŽNOG CENTRA	3
1.3 PERIOD VAŽENJA I POSTUPAK AŽURIRANJA	3
2.1 OPIS USLUGE	3
3.1 SPISAK SVIH POSTROJENJA	4
3.1.1 PROIZVODNI POGON ZA REDOVNO ODRŽAVANJE	4
3.1.2 PROIZVODNI POGON ZA VANREDNO ODRŽAVANJE	4
3.1.3 MAGACINI	5
3.1.4 ŽELEZNIČKA INFRASTRUKTURA	5
3.2 MESTO USLUŽNOG OBJEKTA	5
3.3 RADNO VREME USLUŽNOH OBJEKTA	5
3.4 PLANIRANE IZMENE TEHNIČKIH KARAKTERISTIKA	6
4.1 INFORMACIJE O NADOKNADAMA	6
4.2 INFORMACIJE O POPUSTIMA	6
5.1 PRAVNI ZAHTEVI	6
5.2 TEHNIČKI USLOVI	6
5.3 ZAKUP KOLOSEKA U USLUŽNOM OBJEKTU	
5.4 IT USLUGE	
6.1 ZAHTEV ZA KORIŠĆENJEM USLUŽNOG OBJEKTA ILI USLUGAMA KOJE SE	
PRUŽAJU U USLUŽNO OBJEKTU	6
6.2 ODGOVOR NA ZAHTEV ZA PONUDOM	7
6.3 INFORMACIJE O DOSTUPNOM KAPACITETU I PRIVREMENIM	
OGRANIČENJIMA	7
7.1 PROSTORNI PLAN USLUŽNOG OBJEKTA	





1.1 UVOD

Informaciju o uslužnom objektu MIN Lokomotiva je izradila u skladu sa odredbama Pravilnika o elementima informacije o uslužnom objektu ("Službeni glasnik RS", broj 66/19). MIN Lokomotiva doo spada u kategoriju 5), po članu 15, stav 2 Zakona o železnici (" Službeni glasnik RS" broj 4/218), odnosno spada u kategoriju Objekata za održavanje.

Fabrika za proizvodnju i remont šinskih vozila MIN Lokomotiva osnovana je 1884-te godine kao glavna radionica srpskih državnih železnica za popravak i pregled parnih lokomotiva.

Nad MIN Lokomotivom proglašen je stečaj 201S.godine. Maja 2018.godine. MIN Lokomotiva je kao pravno lice kupljena je od strane sadašnjih vlasnika (fizičkih lica).

Osnovna delatnost MIN Lokomotive doo je remont i održavanje železničkih vozila, projektovanje i proizvodnja novih železničkih vozila i pružanje raznih usluga vezano za železničku industriju.

1.2 OPERATOR USLUŽNOG OBJEKTA

- Naziv uslužnog objekta: MIN Lokomotiva doo
- Adresa: Šumadijska 1, 18000 Niš
- Kontakt osoba za uslužni objekat: Dejan Avramović
- Broj telefona: +381 18 415 1131
- E-mail: min.lokomotiva.kabinet@gmail.com
- Internet adresa: https://www.minlokomotiva.rs/
- Radno vreme: 7.00-15.00, osim vikendom i praznicima

1.3 PERIOD VAŽENJA I POSTUPAK AŽURIRANJA

Ovaj dokument se ažurira u vreme objave inforamcije, osim ako su zbog izmena u sadržaju nužne vanredne izmene

2. 1 OPIS USLUGE

Osnovne usluge koje pruža uslužni objekat:

- Redovno održavanje, koje se obavlja periodično i unapred planira
- Vanredno održavanje koje se obavlja radi otklanjanja kvarova, nedostataka, istrošenja i zagađenja u toku eksploatacije

Redovno održavanje obuhvata:

- Kontrola železničkih vozila u toku eksploatacije
- Pranje i čišćenje





- Servisni pregled
- Kontrolni pregled
- Redovnu opravku

Vanredno održavanje obuhvata:

- Vanredne opravke manjeg ili većeg obima
- Vanredno pranje i čišćenje

3.1 SPISAK SVIH POSTROJENJA

Uslužni centar MIN Lokomotiva doo sastoji se od sledećih celina

- Proizvodni pogon za redovno održavanje
- Proizvodni pogon za vanredno održavanje
- Radionica za ispitivanje lokomotiva na promenljivom naponu
- Radionica za ispitivanje brzinomera
- Radionica za održavanje elemenata vešanja i ogibljenja
- Magacin u zatvorenom prostoru
- Magacin na otvorenom prostoru
- Železnička infrastruktura

3.1.1 PROIZVODNI POGON ZA REDOVNO ODRŽAVANJE

- Ukupna površina pogona za redovno održavanje je : 1100m2, podeljena u dva objekta
- Proizvodni prostor je opremljen kolosecima i mosnim dizalicama od 5t
- Proizvodni pogon je tehnološki opremljen za redovno održavanje dizel i elektro lokomotiva
- Ulaz/izlaz vozila u pogon je omogućen je preko 5 ulazno/izlaznih koloseka povezanih preko preko prenosnice nosivosti 150t sa glavnim kolosekom ka stanici Niš

3.1.2 PROIZVODNI POGON ZA VANREDNO ODRŽAVANJE

- Ukupna površina pogona za vanredno održavanje je: 2500m2
- Proizvodni pogon za vanredno održavanje opremljen je kolosecima i mosnim dizalicama od 45 t (3 komada) i 5t (2 komada)
- Proizvodni pogon za vanredno održavanje opremljen je tehnološki za održavanje železničkih vozila

117

- Ulaz/izlaz vozila u pogon omogućen je preko 4 ulazno/izlaznih koloseka povezanih preko preko prenosnice nosivosti 150t sa glavnim kolosekom ka stanici Niš





- Proizvodni pogon za vanredno održavanje je opremljen viljuškarima i transportnim kolicima za unutrašnji transport
- Radionica za ispitivanje brzinomera tipa Hasler je opremljena atestiranom probnicom, nalazi se u sklopu pogona za redovno održavanje
- Radionica za održavanje elemenata vešanja i ogibljenja se nalazi u delu pogona za vanredno održavanje železničkih vozila i tehnološki je opremljena za održavanje elementa vešanja i ogibljena železničkih vozila

3.1.3 MAGACINI

- Površina zatvorenog magacina je oko 200m2. Magacin je opremljeno stalažama za smeštaj rezervnih delova i opreme.
- Otvoreni magacin ima površinu od 500m2 i koristi se smeštaj crne i obojene metalurgije, tehničkih gasova i ulja i maziva
- Zatvoreni i otvoreni magacini su povezana preko prenosnice sa glavnim kolosekom ka stanici Niš
- Zatvoreni i otvoreni magacini imaju putnu vezu sa glavnom saobraćajnicom

3.1.4 ŽELEZNIČKA INFRASTRUKTURA

- Ukupna dužina koloseka na lokoaciji (spoljašnji i unutrašnji) je oko 2000m
- Uslužni objekat je povezan sa železničkom stanicom Niš sa jednim matičnim kolosekom, koji se preko skretnice usmerava na koloseke prema pogonu.
- Dozvoljeno opterećenje koloseka je 22t po osovini, dozvoljena brzina na koloseku je 5km/h
- Železnička vozila se sa glavnog koloseka prebacuju na koloseke u okviru proizvodnih kapaciteta preko specijalnog transportera-prenosnice nosivosti 150t

3.2 MESTO USLUŽNOG OBJEKTA

- Šumadijska 1, 18000 Niš
- Geografska širina 43°19'07"
- Geografska dužina 21°52'39"
- Priključak na javnu putnu mrežu
- Priključak na javnu železničku mrežu preko železničke stanice Niš

3.3 RADNO VREME USLUŽNOG OBJEKTA

- Ponedeljak-petak od 7.00-15.00h
- -Vikendom i praznicima su neradni dani

Е Инфраструктура



3.4 PLANIRANE IZMENE TEHNIČKIH KARAKTERISTIKA

- Ne planiramo izmene tehničkih karakteristika

4.1 INFORMACIJE O NADOKNADAMA

- Metodologija izračunavanja nadoknade je norma čas (NČ)
- Nadoknada za pristup uslužnom objektu se ne naplaćuje
- Cene usluga su definisane zvaničnim cenovnikom

4.2 INFORMACIJE O POPUSTIMA

- Operator uslužnog objekta može u specijalnim okolnostima nuditi popust na usluge koje se nude korisnicima prema međusobnom dogovoru uz poštovanje zahteva operatera o čuvanju poslovne tajne

5.1 PRAVNI ZAHTEVI

- Za pristup uslužnom objektu potrebno je sklapanje ugovora ili narudžbenica

5.2 TEHNIČKI USLOVI

- Uslužnom objektu mogu pristupiti železnička vozila standardne širine 1435mm
- Uslužnom objektu mogu pristupiti vozila sa maksimalnim dozvoljenim osovinskim opterećenjem od 22t po osovini

5.3 ZAKUP KOLOSEKA U USLUŽNOM OBJEKTU

- Zakup koloseka u uslužnom objektu je definisan posebnim cenovnikom

5.4 IT USLUGE

- Uslužni objekat ne nudi IT usluge

6.1 ZAHTEV ZA KORIŠĆENJE USLUŽNOG OBJEKTAILI ZA USLUGAMA KOJE SE PRUŽAJU U USLUŽNOM OBJEKTU

- Podnosilac zahteva dužan je poslati Zahtev za ponudom na e-mail adresu min.lokomotiva.kabinet@gmail.com. Ili preko telefona na broj + 381 018 415 1131
- Usluga se pruža na osnovu potpisanog ugovora ili narudžbenice
- Za izvršenje usluga potrebno je da se najavi odgovornom licu u uslužnom objektu 2 dana unapred

119

- Podnosilac zahteva dužan je u zahtevu za ponudu navesti:
 - 1. Vrsta usluge koja se traži
 - 2. Osnovne podatke o železničkom vozilu
 - 3. Vremenski period za korišćenje usluga





- 4. Potrebu za magacinskim prostorom ukoliko takva potreba postoji
- 5. Posebni zahtevi

6.2 ODGOVOR NA ZAHTEV ZA PONUDOM

- Rok za obradu zahteva i davanje ponude je do tri radna dana u zavisnosti od složenosti zahteva
- Osnovni kriterijum za određivanje rasporeda i kapaciteta uslužnog objekta jeste da prednost kod raspoređivanja ima podnosilac zahteva koji ima potpisan ugovor ili je ispostavio narudžbenicu ili je u završnim pregovorima sa vlasnikom uslužnog objekta o pružanju usluge
- U slučaju da dođe do kolizije u zahtevima, a koji se odnose na kapacitete uslužnog objekta prednost ima onaj podnosilac zahteva koji ima dugoročni ugovorni odnos sa vlasnikom uslužnog centra ili je po redu podnošenja zahtev bio ispred ostalih podnosilaca zahteva za uslugom. Ako i pored navedenih kriterijuma dođe do problema u korišćenju kapaciteta uslužnog centra odgovorno lice uslužnog centra će nastojati da razgovorom i koordinacijom sa korisnicima izvrši preraspodelu kapaciteta i po potrebi uvede drugu smenu kako bi svi korisnici bili adekvatno usluženi.

6.3 INFORMACIJE O DOSTUPNOM KAPACITETU I PRIVREMENIM OGRANIČENJIMA

- U slučaju vanrednih događaja koji mogu privremeno ograničiti kapacitet uslužnog objekta ili obavljanje planiranih radova odgovorno lice uslužnog centra će o tome obavestiti sve korisnike o nastalom događaju i o ograničenjima, kao i odgovrajuće službe koje upravljaju infrastrukturom.

120

7.1 PROSTORNI PLAN USLUŽNOG OBJEKTA

- Prostorni plan fabrike MIN Lokomotiva



Appendix 3.10a. Information on the service facility managed by Nelt Co



Nelt Co d.a.a. Maršala Tita 206 P. fah 530 11272 Dobanovci Srbija t +381 11 3779 100 f +381 11 3779 140 office@nelt.com www.nelt.com www.neltlsp.rs PIB 100037645 MB 17304712

Sektor za pristup železničkoj infrastrukturi Nemanjina 6, Srbija Datum: 21.12.2020.

PREDMET: INFORMACIJE O USLUŽNOM OBJEKTU – Industrijski kolosek "NELT Co", koji je deo Nelt Terminala

U stanici Surčin na pruzi Beograd Ranžirna, Park B - Ostružnica - Batajnica za javnu železiničku infrastrukturu kojom upravlja "Infrastruktura Železnice Strbije" ad priključen je industrijski kolosek čiji je vlasnik "Nelt.Co." d.o.o. Beograd.

Industrijski kolosek je namenjen samo za prijem i otpremu kolskih pošiljaka i isti se ne koristi za potrebe prevoza opasnih materija.

Industrijski kolosek počinje u nastavku četvrtog koloseka stanice Surčin odvojnom skretnicom br:2, u km. 14+166,57 pruge Beograd Ranžirna A– Ostružnica – Batajnica. Industrijski kolosek "NELT Co" doo Beograd, odvaja se od javne železničke infrastrukture, kojom upravlja "Infrastruktura Železnice Srbije" ad, u stanici Surčin koja je nalazi u km 14+635,60 (*sredina stanične zgrade*) jednolosečne elektrificirane pruge Beograd Ranžirna, Park B - Ostružnica - Batajnica.

Skretnica br. 1c industrijskog koloseka "NELT Co" doo Beograd , matični kolosek razdvaja na dva kraka odnosno na dva koloseka

Industrijski kolosek je ukupne građevinske dužine 1293,31m i sastoji se od tri dela i to:

- matičnog koloseke građevinske dužine 616,00 m
- Kolosek I građevinske dužine 348,00 m
- Kolosek II građevinske dužine 343,31 m

Koloseci I i II imaju korisnu dužinu svaki po 300 m tako da je ukupna korisna dužina na industrijskom koloseku 600 m.

Industrijski kolosek oposobljen je za kategoriju pruge C2 odnosno za:

- najveću dozvoljenu masu po osovini do 20 t/os (200 kN/os) i
- najveću dozvoljenu masu dužnom metru do 6,4 t/m (64 kN/m)

Koloseci I i II su na industrijskom koloseku vezani samo sa jedne strane tako da se na drugom kraju završavaju grudobranima,.

Manevru od stanice Surcin do Industrijski kolosek "NELT Co", za sada obavlja železnički operater "Srbija Cargo" ad.

Posedujemo 1 reach stacker kojim vršimo manipulacije kontejnera sa voza koji pristigne na Industrijski kolosek "NELT Co",

Cena za manipulacije punih kontejnera naplacuju se EUR 25 a praznih kontejnera EUR 20, obracunata u dinarskoj protivvrednosti





Nelt Co d.a.a. Maršala Tita 206 P. fah 530 11272 Dobanovci Srbija

t +381 11 3779 100 f +381 11 3779 140 affice@nelt.com www.nelt.com www.neltlsp.rs PIB 100037645 MB 17304712

Radno vreme Nelt terminala je radnim danima od 08h – 21h, subotom od 08h-16h, nedelja je neradni dan. Praznicima ne radimo

Nelt terminala Ul. Maršala Tita 206, 11272, Dobanovci +381 60 8318595 +381 11 3779 33 www.nelt.com

S poštovanjem,

elema Tovas



Appendix 3.11. Railway infrastructure development projects

The National Assembly, upon the proposal of the Government, passes the National Program for the railway infrastructure, which contains:

- 1. the existing characteristics and condition of the railway infrastructure of the Republic of Serbia;
- 2. strategy for construction, reconstruction and maintenance of the railway infrastructure;
- 3. development components in the construction of the new infrastructure capacities of special significance for the Republic of Serbia;
- 4. defining of the structure, time schedule for realization of priorities, level and sources of the financial assets needed for completion of the National Program activities.

National Program is passed for a five-year period.

Based on the National Program, the Infrastructure Manager prepares the annual program for construction, reconstruction and maintenance of the railway infrastructure, organization and regulation of the railway traffic.

No	Project	Estmated commencement of works (date or quarter)	Duration of works	Works' execution method
1	Modernization (construction and reconstruction) of railway line Belgrade –Subotica –state border (Kelebia) section Novi Sad - Subotica	December 2021	Q3 2025	As of April 7, 2022 complete traffic interruption is valid between the service points Novi Sad (excl.)- Subotica (excl.)
2	Reconstruction of Niš – Brestovac section, from km 244+600 (exit from Niš station) to km 267+430 (entry into Brestovac station)	October 18 th , 2021	Q4 2025	Works are executed during daily line closures. Starting from April 19 th , 2022 traffic is performed with diesel locomotives
3	Civil engineering reconstruction of Niš – Dimitrovgrad railway line, section Sićevo - Dimitrovgrad	November 11 th , 2023	Q4 2026	Execution of the works and traffic performance according to the schedule: 36/36/36/60. Total line closure in the duration of 91 days starting Q1 2026.
4	Electrification of Niš – Dimitrovgrad railway line, section Sićevo - Dimitrovgrad	March 2024	Q4 2026	Execution of the works and traffic performance will be realized alternately in intervals agreed with the Contractor.
5	Construction of northern bypass around city of Niš: 1. Crveni Krst – Pantelej – Matejevac 2. Trupale – Crveni Krst 3. Trupale – Niš Marshalling Yard	Q4 2023	Q3 2025	Execution of the works and traffic performance will be realized alternately in intervals agreed with the Contractor.



Appendix 4.1. Request for train path allocation (form)

Application form for train path allocation

Railway und	ertaking - opei	rator:					
Address:							
Contact perso	on:						
Tel.		Fax.			e-mai	il:	
Place and dat	e:						
1. BASIC I	NFORMATION	ON ON THE RE					
		Train No in	Desired tir	ne	Route	T	T
Train type		the previous	departure	arrival	from	to	via
		timetable	r				
NOTES							_
2. TRAIN	TIMETABLE	INFORMATIO	N				
		Storing time	in comic-				
Stops in se	rvice points	Staying time points [min]	in service	Running	calendar		
		points [mm]					
2 ED + D 1	OVEODA (A EV	O.V.					
3. TRAIN	INFORMATION 1	ON I			D 1:		I
Type of	Additional traction				Braking	<u>g</u> 	
Type of traction,	units, serial						
serial No	No of	Series and No	Train	Train			Maximum
of	traction	of the wagon	mass	length		Percentage	train speed
traction	unit,	/motor unit	[t]	[m]	Type	[%]	[km/h]
unit,	function in						
route	the train,						
	route						
4 OTHER	REQUIREM	ENTS					
4. OTHER	KEQUIKEMI	LITIO					
						L.S. SI	GNATURE

Инфраструктура железнице Србије а.д.

Appendix 4.1a. Request for train path allocation (e-papir)

Republic of Serbia

JSC "Infrastructure of Serbian Railways"

Rail Infrastructure Access Department

www.infrazs.rs

Business name / title

REQUEST

FOR TRAIN PATH ALLOCATION

Basic information about the applicant

Head office																	
Contact phone																	
Name and surname of the representative																	
Identification number								PIB									
Email address																	
	Bas	ic da	ta or	the	e re	quire	d tra	in path									
	Numbe	r of		De	sire	ed tin	ne				Ro	out	e				
Train type	train previous		de	part	ure	arr	ival	from			to			via			
				N	Vote	e											
		,	Γrair	tin	neta	able d	ata										
Stops in service points Staying time in service points [min]			Running calendar														
	Train data																



	Additional				В	raking	
Type of traction, serial No of traction unit, route	traction units, serial No of traction unit, function in the train, route	Series and No of the wagon /motor unit	Train mass [t]	Train length [m]	Туре	Percentage [%]	Maximum train speed [km/h]
			Special	note			

I am aware that, if I do not submit the stated data, necessary for the decision-making of the body within 8 days, the request for initiating the procedure will be considered irregular.

The request can also be submitted on sektor.pzi@srbrail.rs

In _	, on		
			Applicant's signature



INFORMATION FOR THE APPLICANT

Deadline for resolving the submitted request	30 days before the start of the timetable
--	---




Appendix 4.1b Template for submission of traction vehicle technical data


1.	Series	1116
2.	Description	BoBo
3.	Length	19280 mm
4.	Weight	88 t
5.	Maximum speed	230 km/h
6.	Inertia factor	1,15
7.	Resistance formula	

8. Traction diagram and braking diagram

V	Fv
[km/h]	[kN]
0	300
92	250
100	230
120	192
140	165
160	144
180	128
200	115
220	105
230	100

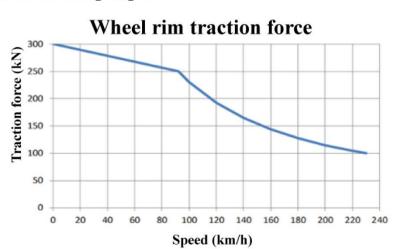

V	Fk
[km/h]	[kN]
0	100
40	100
50	170
60	240
96	240
100	230
110	209
120	192
130	177
140	165
150	154
160	144
180	128
200	115
220	105
230	100

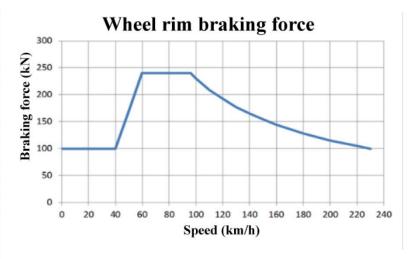

9. Traction type

electric



Appendix 4.2. Instruction for completion of the Request for train path allocation

	Column name	Data type	Explanation
	Train type	М	Specify train type: - Passenger train (pursuant to Articles 32 and 34 of Traffic Rulebook, Official Gazette of RS No 34/22 and 107/22) - Freight train (pursuant to Articles 33 and 34 of Traffic Rulebook, Official Gazette of RS No 34/22 and 107/22)
	Train No in the previous Timetable	С	Specify the number of the train from the previous Timetable, whose path elements match applicant's request (e.g. 541, 40760,)
1.	Desired time	M/N*	Specify the desired time of the train departure from the origin station or the time of arrival to the destination station
	Route	M	Specify the origin and destination station of the train route and characteristic service point between those two stations which defines the train route
	Note	M	Specify request type: - annual request (for the new Timetable) - request for regular or extraordinary amendments to the valid Timetable while specifying the number of regular amendment (I, II, III, IV or V amendment) - ad hoc request
	Stops in service points	M	Specify all service points where the train needs to stop
2.	Staying time in service points	M	Specify the needed staying time in each service point (in minutes) where train staying is necessary
	Running calendar	M	Specify running calendar for regular trains. If a path is requested for the optional train, enter the indication "optional", and for trains under the ad hoc request specify the train running date
2	Type of traction, serial No of traction unit, route	M	Specify traction type (electric or diesel), serial number of traction (operating) locomotive and route of each particular locomotive if there is change of traction type on the required route
3.	Additional traction units, serial No of traction unit,	M	Specify number of additional traction units, traction units type (electric or diesel), serial number, position on the train (double heading, banking,) additional traction unit running route



	function in the train, route		
	Series and No of the coach/multiple-unit set	M	For passenger trains, specify coach series (letter designation of coach series) and number of coaches on the train i.e. series, number and serial number of multiple-unit sets (DMU/EMU)
	Train mass	М	Specify total train weight in the format of a sum of weight of hauled vehicles and the weight of all operating locomotives (Q+L)
	Train length	М	Specify train length in metres without the length of operating locomotives in service
		M	Braking type: specify braking type (G, P, R, Mg,)
	Braking	M/N**	Braking percentage: specify braking percentage which has to be considered during timetabling
	Maximum train speed	M	Specify maximum train speed considering characteristics of vehicles on the train
4.	Other requirements	С	Specify other requirements of the train such as: shunting of vehicles, change of train composition, connection, staff shift, type of intermodal transport unit, dangerous goods type, special consignments, train stays at border-crossing, technical stops (inspection, water supply, waste handling and similar) and time period required, need for additional track capacities (side tracking, pre-heating/cooling, forming of trains and similar), need for access to other additional service facilities and similar.

Legend:

M – data is mandatory

C – data is conditional (mandatory, if the condition is fulfilled)

 M/N^* - data is mandatory for passenger trains/data data is non-mandatory for freight trains

 M/N^{**} - data is mandatory for international trains/data is non-mandatory for domestic trains For multiple-unit sets running in domestic traffic, specify the maximum braking percentage provided by the multiple-unit set

Note: Upon receipt of the request for path allocation, IŽS will provide the RU with the infrastructure data based on which the RU will calculate the train running times and submit them to IŽS.



 ${\bf Appendix~4.3.~Deadlines~for~annual~2024/2025~timetable~preparation}$

Phase	Authority	Deadline
Submission of requests for path allocation for international passenger trains	RU	12.02.2024
Regular deadline for submitting allocation requests for annual timetable	IM	15.12.2023-18.04.2024
Coordination and harmonization of requests	IM/RU	09.04.2024-01.07.2024
Presentation of the First Draft timetable to RU	IM	01.07.2024
Draft review – remarks, suggestions, proposals and opinions	IM/RU	02.07.2024-02.08.2024
Draft timetable 2024/2025	IM	30.08.2024
Solving of problems and questions	IM	02.09.202409.09.2024
Extraordinary requests (remaining capacities)	RU	04.10.2024
Final deadline for capacity allocation according to extraordinary requests (remaining capacities)	IM	25.10.2024.
Timetable coming into effect	IM	15.12.2024



Appendix 4.4. Deadlines for amendments to annual 2024/2025 Timetable

Amendment No	Submission date of requests for amendments to annual timetable	Deadline for capacity allocation	Application date for amendments to annual timetable
I	16.12.2024.	17.01.2025.	03.02.2025.
II	10.02.2025.	20.03.2025.	07.04.2025.
III	21.04.2025.	23.05.2025.	15.06.2025.
IV	07.07.2025.	15.08.2025.	01.09.2025.
v	11.08.2025.	19.09.2025.	06.10.2025.



Appendix 5.1. Overview of railway lines on which train running is possible when they are manned only with engine driver

Train running with engine driver only in a traction unit, without train crew (engine driver – without train crew), can be performed on the following lines:

- Belgrade Center-Stara Pazova Šid state border (Tovarnik);
- (Belgrade Center) Stara Pazova -Novi Sad Subotica state border (Kelebia);
- Belgrade Center Junction G Mladenovac-Lapovo-Niš-Preševo state border (Tabanovci);
- (Belgrade Center) Rakovica Jajinci Mala Krsna Velika Plana;
- Belgrade Center Pančevo Varoš (Vršac);
- Belgrade Center Resnik Požega Vrbnica state border (Bijelo Polje)
 - Section Resnik-Požega-Užice;
- Inđija Golubinci;
- Novi Sad Novi Sad Marshalling Yard Open line junction Sajlovo;
- Belgrade Center Novi Beograd;
- Belgrade Center Open line junction G (Rakovica);
- Belgrade Marshalling Yard "A" Ostružnica Batajnica;
- Belgrade Marshalling Yard "B"- Ostružnica;
- Belgrade Marshalling Yard "A"-Open line junction "B"-Open line junction "K/K1"- Resnik;
- Ostružnica Open line junction "B" (Open line junction"K/K1");
- Belgrade Marshalling Yard "B" Open line junction "R"-Open line junction "A"-(Resnik);
- (Belgrade Marshalling Yard "B") Open line junction "R" –Rakovica;
- Belgrade Marshalling Yard "A" Open line junction "T" Rakovica;
- Belgrade Marshalling Yard "B" Open line junction "T" (Rakovica);
- Connecting line in the area of Open line junction "K/K1": (Open line junction "B") switch "K" switch "K1" (Jajinci);
- Topčider Putnička (km 4+195) Open line junction G (Rakovica)³;
- (Open line junction Pančevački most) Open line junction Karađorđev park Open line junction Dedinje – (Open line junction G);
- By-pass line of Mala Krsna station: (Kolari) junction points 1 junction points 28 (Osipaonica);
- Open line junction Lapovo Varoš Lapovo Marshalling Yard Lapovo;
- Trupale Niš Marshalling Yard Međurovo:
- Crveni krst Niš Marshalling Yard;
- Niš Open line junction Most (Niš Marshalling Yard);
- Mala Krsna Požarevac (Bor);
- Pančevo Varoš Pančevo Voilovica:
- Smederevo Open line junction Jezava Radinac Mala Krsna;
- Novi Sad Marshalling yard Open line junction Sajlovo.
- Subotica Horgos State Border (Röszke).

On the other lines, in particular cases, train running can be performed with engine driver – without train crew in compliance with terms stipulated in the Traffic Rulebook ("Official Gazette of the Republic of Serbia", No 34/22 and 107/22).

³ By virtue of the Conclusion of the Government of the Republic of Serbia No 340-2989/2022 dated April 7, 2022, the Decision of the Shareholders' Meeting of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways" Belgrade concerning the termination of public railway traffic, dismounting and reconstruction of infrastructure capacities on railway line Topčider Putnička (km 4+ 195) – Open line junction "G" – (Rakovica), has been approved.




Appendix 5.2. Overview of the lines that do not meet the conditions for train running with an engine driver only

List of Infrastructure of Serbian Railways lines that do not meet the conditions for operation of traction units with an engine driver only (other lines meet the conditions):

- (Belgrade Center) Resnik Požega- Vrbnica- state border (Bijelo Polje)
 - Užice Vrbnica section.



Appendix 5.3. Geometry of pantograph (current collector) TIP POS - 254/III used on IŽS network

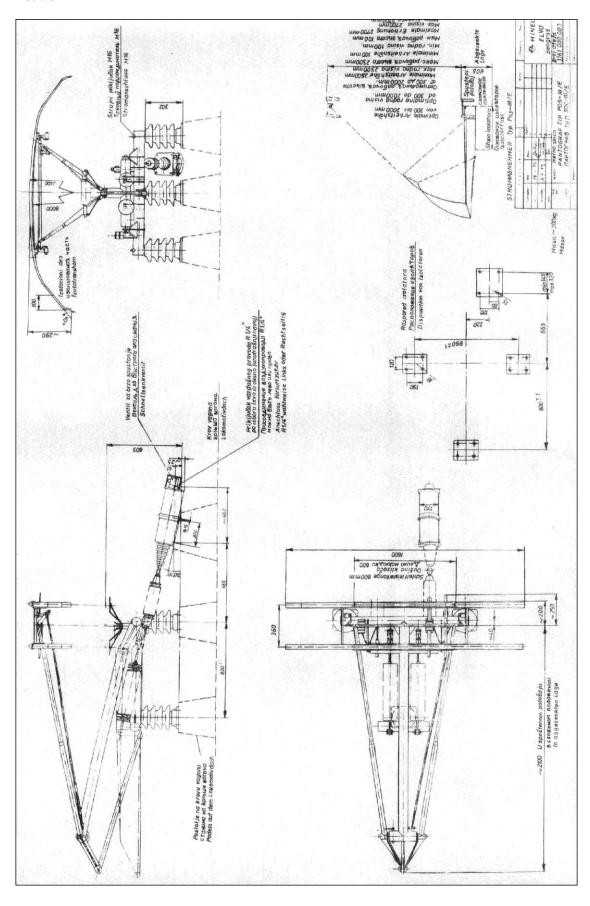



Appendix 6. Register of infrastructure data

	əbuitilA	30	T	9,76	82,1	92		87,6	84,3	70 11	84 96		79,11	84,96	101,57	102.06	100,96	91,7	81,77	84,66	87.29	83,79	86,71	84,93												225 5	2,000
	Loading gauge	1 6			ZS-I	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	ŽS-1		ŽS-I	ŽS-I	ŽS-I	1-SZ	Н	ŽS-1	ZS-I	ŽS-I	ŽS-I	ŽS-I	S-I	I-SZ	-		ŽC.1	ZS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	1-67 ŽS-1	ŽS-I	ŽS-I	1-52-1	ZS-I
[Vab] anil adt	←	28		_	10 Z	1 Ž	Н	5 Z	2 Ž	Ž	+		8/1 Ž	1 Ž	3 Ž	+	6 Ž	3 Z	Z	3 Ž	2 Ž	Ž	\rightarrow	5 4 Ž	-		×	7 Z	- Ž	7 6	2	4 Ž	- Z	- Ž	- Ž	14 7	\perp
Ruling Tesistance of	\rightarrow	27 2			,	4	Н	1	1	-	+		10/1	3	6 -	_	+	0 0		-	2	П	-	4 -	-			10	9	+		\vdash	ø	10	10	7 5	+
gradient	edole	-			10	-	П	5	2	-	- 0		7/0	0	9 (7	5	6 0	1	3	2		,	۷ 4	1			7	0	T		m 0	>	0	\vdash	2 0	2 22
Ruling	onilon	25			0	4		0	0	-	3 1		0/6	3	- 0	-	9	0		1	2		-	+ -	1			8	5			9		6		12	
[%] u	Gradient of the statio	24		0,0		7 2,0		1,9	0,0	0			0,3	4,1		0.0		0,0			0,0	Ш		0,0			0,0		1,5			7,9		0,6	I I	7.7	
sn	Minimum curve radio	Ш			200	269		700	2500	2000	2000		700	4993	2500	4000	3000	10000	1300	10000	10000	1500	,	15000			300	700	300			400) SOL	300	300	30 30	400
	Open for the acceptal dispatching of passen operations	22		Ь	ᅀ	P/F ¹⁾	Ъ	<u>а</u>	Ь	5/0	P/F	ц	P/F	P/F	P/F	ч а	P/F	D/F	1	Ы	P/F		Ė	P/F			Д		Ь	Д	Ь	P/F	۵	P/F	д,	P/F	ď
	Occupancy of service	_		Ы	þ	д	Н	n	P	:	0 0	Ъ	n	Д	Ы	>	Ъ	D		n	þ		r	4	1		д	T	Д	\dagger		ם ;	5	n	D:	o a	'n
mroth	slq gnibsol-bnə/-əbi2	20		П		S	П		S	ŭ	2 02		S	S	ū	2	S/E	v	2		T		Ę	NE	i I		T	T	П	T		S	T	S	П	v	2
	Freight car scales	19				T	П									\top			\dagger	T			;	I es	1	(e)		T		\top			T	П	П	T	T
nıc	Service point code - I	18		16052	16003	16002		16001	16204	16501	16503	16204	16501	16503	16505	16507	16550	16508	16510	16511	16513	16514	\neg	16517		border - (Tabanovce)	16052		16103	16102	16101	15501	15408	15402	15403	15404	15406
he service point	Manner of securing t	17		\vdash	= -	=	\sqcup	=	11 1	:	_	1	11	11 1		-	1			-		-				rder - (T			1	-			-	1			
					T T	T.	VT	T I	VT	TWT	, L		VT	TWT	B	9 6	В	В	n n	e e	д	В	m	nce p		ate bor	I,	I.	VT	T L	TV	VT	AB	В	В	n m	m
nonsiu	Manner of traffic reg	9			RC with TWT RC with TWT	RC with TWT	RC with TWT	RC with TWT RC with TWT	RC with TWT	RC with TWT	RC with TWT		RC with TWT	th TV	RC with AB	with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	with AB	RC with AB	KC With AB station distance		0 - st	RC with TWT RC with TWT	th TWT	RC with TWT	RC with TWT	RC with TW7	RC with TWT	RC with AB	ith A	RC with AB	iffh A	RC with AB
					OWI	Cwi	C wi	RC with	C wi	RC with	CW		C wi	RC with	SC W	RC W	SC W	SC W	SC W	SCW		RC w	200	ation		rešev	RC with	RC with	C wi	RC with	CWI	CWI	RC W	SC W	SC W	ء اھ	200
			mik)		2 2	1	2	X X	R	~	1 2		æ	R	" "					7			7	sta		iš - P	2	1	2	~ ~	2	2					
	snisat teagno		Tova	9 p	d 5	6 p	П	d 2	d 6		4.5	1 10		9 p	d 5	0 0	q 5	43		d 3	d 5		1	C D	1	N-0	9 p	T		\top			70	П	П	\top	T
B→A	acceptance of the	15) - L	5 and 6	4 and 5	8 and 9		1 and 2	5 and 6		4 and 5	9 and 10		5 and 6	4 and 5	4 and >	4 and 5	4 and 5	7	2 and 3	4 and 5			4 and		apove	5 and 6		5			٣,	1 and	4	. 3	1 0	1
Direction	rain length		hord	909	628	411	П	500	238		651			443	749	80	T	776	1	299	673		5	/0/	1	1-3	909	T	702			730	6	81	710	8 6	681
	ongest trains Maximum permitted	-	ES - state border - (Tovarnik)	5	+	+	Н	_	\vdash	+	_	_			\vdash	_	Н	_	+	_	+	Н	+	+		enova	_		7	+		Н	+	7	7	٥٧	9
G-V	acceptance of the	13	Šid	and	2 and 3	1 and 2		3 and 4	1 and 2	10.00	1 and 3	9 and 10	2 and 3	1 and 2	2 and 3	2 and 5	2 and 3	2 and 3	amo	4 and 5	2 and 3		1	2 and 5		Mlade	5 and 6		4			۳)	1 and 2	4	۳,	1 0	2
noirection A←A	rain length Tracks for	12	MAIN LINES azova - Šid - s	506 5	558 2	550 1	\vdash	199 3	227 1	1,7	+	757 9	411 2	641 1	655 2	_	Н	731 2	+	614 4	552 2	\vdash	_	7 (00	-	Rakovica - Mładenovac - Lapovo - Niš - Preševo - state	508 5	+	702	+		730	+	111	753	60 60	681
pəəds	Left track Maximum permitted	H	MAIN Stara Pazova -	100	-	5	Ш	120	2	- 1	200 II 6	7 1001		160 ^T 6	9	5	7	7	1		5				Šid)	1 1	5	<u></u>	80 7		<u> </u> 	7		7	7	0 0	9
Maximum permitted	Right track	Н	Belgrade -		_			120			. 200 II 20	T 001	0.	160 ^T 16	80	120		20	Т	-	30			80	stances for freight traffic (mixed,	"S" NO	9		8 08		0/		OC		30		30
		Н	Bel	L	+		-	_	-			_			\vdash		\vdash	_		~ ~	_		~ l		traffic	JUNCTION			ш						<u></u>	+ -	_
	Railway line category	Н	101	'├─	점 점	+	\vdash	7 7	+	_	+	\vdash	D4	7	\vdash	a a	+	20 2	+	2 2	+	+	+	2 2	reight		_	7	\vdash	7 2	+	7 2	+	+	7 2	+	7
	Class of railway line	00			Z Z	×	Σ	×××××××××××××××××××××××××××××××××××××××	M	Z >	>		M	M	M	Z	M	Z	M	×	Z	M	Σ;	ZZ	s for i	PEN LINE	>	Σ	M	Z	×	∑ ;	≦ ≥	×	Z)	Σ >	Σ
əui	Single/double-track l	7			ם		Ω	ם	D	ם	2		Ω	Q	Q q	ם		ם		O C	ם	Ω	0	۵ ۵	istance	PEN	۲		Ω		Ω	Q s	2 0	S	S	N V	S
1	Type of service point	9		-		-	3	3	1	0 -		-		1		3	-		3	1,	n -	3	۳,	13	ation d	ar - 0	- 4	9	-	m v	3	- 0	7 6		<	7	-
																									and sta	102 Beograd Centar - C											
																									oints a	grad											
																									vicep	Beo											
	oint																								or ser	102	Щ	1									
	Name of service point	1																							data f		N										
	serv	5																							Id); T		TO.	٥		Δ							
	le of			2														ZIA.			WIK				ovi Sa		4 5	ğ		TINCTION A							Ы
	Nam			Ä	۹.					Q. <	. 2		AF	/A F				L L			N. S. S. S. S. S. S. S. S. S. S. S. S. S.			8	ic (N		NA	Š		Į.			AIIV			,	AJSI
				CE	NAR AR				'A'	SS		AF	702	ZOV	 	H		M			CIÆ			2	r traff		E	312	A	ا اِن	2	Ш.				N E	SM
				RAD!	NOVI BEOGRAD TOŠIN RI INAR	z	Ā	ZEMUN POI KAMENDIN	JNIC	000	A PA	NIC	PA	A PA	BIN	Ē		VOGAN;	RAK		E	CI	KAC	STATE BORDER	senge		RAD I		VIC.	KNEZEVAC	0	M	RIPANI KO		ш	j IC	SOPOT KOSMAJSKI
				90G		MO	É	AME AME	\TA	M 22	AR	ATA	AVC	AR	DIC	KRALiE	JMA	VOGAN	ΙĆΑ	ART	JKU	BAČINCI	BAF	A L	r pas		SOG PIN	Ä	4KO	VEZ	JEV	SNI	PAN	RIPAN	KLENJE	PAN AT A	100
		Н		0 BI	2 N 2	2 ZI	3 A1	8 Z	1 B.	0 K	S S	6 B	N 9	4 ST	11 G	<u> </u>	5 RI	9 V	0 [7	9 W	4 M	0 B	5	S O	res for		0 BI	0 0	3 R		0 0	9 RI	2 2	7 RI	0 N	2 0	S S
	SanisdO	4		0+000 BEOGRAD CENTAR	3+442 NOVI BEOGRA 5+216 TOŠIN BI INAR	8+532 ZEMUN	11+053 ALTINA	12+248 ZEMUN POLJE 13+799 KAMENDIN	19+031 BATAINICAP	22+006 KM 22+006 SC	34+944 STARA PAZOVA	20+616 BATAJNICA	27+106 NOVA PAZOVA	34+944 STARA PAZOVA F	44+361 GOLUBINCI	59+800 KRALIEVCI	64+855 RUMA	73+419	86+100 LACARAK	94+076 MARTINC	105+018 KUKUJEVCI/ERDEVIK	109+100	112+700 GIBARAC	121+950 STA	distan		0+000 BEOGRAD CENTAR 1+337 OPEN I INF II INCTION DEDINIE	4+416 OPEN LINE JUNCTION	8+533 RAKOVICA	10+700 KNEZEVAC 10+880 OPFN I INF	11+729 KIJEVO	14+059 RESNIK	17+950 PLNOSAVA 20+121 RTPANi KOLONITA	21+317	24+760	29+592 KIPANJ 1 UNEL 34+730 R AT i A	41+508
						[~		- -	1	2 2	1 6	3	2	3	4	7 50	٥	7) Š	9	10	10	=	12	tation and des		-			- -		<u> </u>	7	2		7 6	4
	Distance in km	3			3,442	3,316	*2,625	1,195	5,232	2,975	7.838		*6,556	7,838	9,417	6.087	5,055	8,564	4,379	7,976	5,124	4,082	3,600	5,585	ts and s		1 337	3,079	*1,738	2,167	0,849	2,330	2,871	1,196	3,443	4,832	6,778
				.486	_	0461	*				Ι,	\vdash	*		1993.		Ш		"					1	vice poin		£66					Γ,				1	
n.susborr		u 🗪 l	- 1	1 .00	'	-01	1	.58	2.18	1.10		1			8	183	2.18	1.10	1		1681	.01.	7.0		ı 🖒 l 🖺	1		1	.48	81.9).E0	- 1					
public transport	Left track			.90.	-	1.01									n		_								or se	4	50.5	_				_		9	34		
_	Right track Left track	Н		.486	61	101	.8	3261.							2009. 2	.826	5I				1.11				Plata for service points and station distances for passenger traffic (Novi Sad); Teta for service points and station di 1) for the numbers of arrival and denotities for the TPC Jemm.		£0.52			61.9		\dashv		03 00	1884		



	əbufulA	30										000	103,9		105,4		107.4	10/,4		115,3		1263	(,021		134,6	136.4	141,1	144, 6		140 5	110,0			164		173,4	167,7			184,9				190,5
	Loading gauge	50	ŽS-I	75-1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	I-SZ	1-S.7 ŽS-1	ZS-I	ŽS-I	ZS-I	ZS-1	1-07	1-67	ŻS-I	ŽS-I	ZS-I	ZS-I	ŽS-I	ZS-I	1-87 ZS-I	ŽS-I	ŽS-I	ZS-I	1-07	78-1	ŻS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	1-SZ	ZS-1	I-SZ	ŽS-I	ŽS-I	ŽS-I	ZS-I
the line [daN]	←	28	\vdash	0 %	+	4		4 .	1 2			+	0 9	+	9		+	2		3			+	Н	4		\vdash	2	+	0 %	+			2		+	2	+	Ŧ	-				
Ruling resistance of	\rightarrow	27	- 6	n -	•	3		٦,	4 c	9		ų	0 4		4		_	4		4		v			4	3	9	4	•	4 <	-			7		7	3			9				
gradient	Slope	-	4 4	م د		4		4 ,	1	2	Ш	٧	0 9	·	9		0	^		3		~	+		4	3	3	2	c	7 0	1			2	Ц	4	2	4	\downarrow	9	+			
Ruling	lncline	-	5 1	3 -	1	1,3 3			6,5 3				0 0	_	4			4		1,5 4		۷			4	3		0 3		1,0				0,0	Н	5,0 6	0 2	\downarrow	+	9 0				0,0
[%] u	Gradient of the statio	24		0,3							10		3.0		0,0			0,0				00			4,4	0.0		4,0												0.0				0
sn	operations Minimum curve radi	_	800	520	777	500		800	500	700	945	1000	700	800	200	1000	006	800	800	800	480	400	1000	2000	1150	1000	300	299	350	009	205	500	200	2000	700	1000	700	1000	10000	1200	700	700	1500	
bits son	Open for the acceptar dispatching of passer	22	Ъ	٦/٦	٠ م	P/F	Ъ	<u>م</u> ا	P/F	P/F		4	P/F	۵,	Ъ	<u>م</u> ا	Ъ	7/1	4 4	P/F	Ъ	D/F	Ы	Ь	P/F	P/F		Ъ	۲ م	7 7	4	٠ م	Ъ	P/F	Ь	P/F	P/F	۲ م	<u>م</u> م	P/F	ы	4	Ь	P/F
	Occupancy of service	-	D e	4 1		n		ם	<u>م</u> <u>:</u>	<u> </u>	Н	-	ч д	+	Ь		P	۱,	t	ď	Н	D	+	П	ь	Д.	n	n	;	5 =				þ	Н	n	Д	+	+	д				Ъ
	Side-\end-loading pla			2		S			S	S		č	Ω							S		v	2	П	S	S				v	2			S	П	S	S	T	T	S	,			S
	Freight car scales	10															Ī														İ					I		Ī	İ	I				
OIIC	Service point code -	18	15407	13701	13702	13703	13704	13705	13706	13401	13402	13403	13405	13406	13450	13301	13302	13304	13305	13350	13307	13310	13311	13312	13313	13352	12501	12502	12517	12503	12505	12506	12519	12507	12508	12509	12510	12520	12511	12513	12514	12515	12518	12516
he service point	Manner of securing t	17		-	•	1						•	-	_	1		-	-		1			•		1	-	1	1	•	٠,	1			-		1	-	I	I	-				1
noitelu	ger offtert to renneM		RC with AB	T T	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	AB	AB	AB	AB	AB	AB	AB	AB	AB	AB	AB	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	PC with AB	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT
	acceptance of the longest trains		4 6	~ ·	t	2		٣,		4	Н	١.	^		4 and 5		4	C pt		3 pt		4 4			3 d 5	2	-	2	Τ.	1 2 and 2				2 and 3	Н	pt 4	1d 3	\dagger	$^{+}$	and 4				_
Direction B→A	Tracks for			1		.,							_		4 aı		7	4 and		4 and		3 and	1		4 and	,,,		Ì	ľ	, ,	7			2 aı		3 and	2 and	_	_	3 aı				Ĺ
Direction	Maximum permitted train length		656	838	20	969		797	642	998			212		657		909	070		715		670			620	825	799	612	663	1/0	260			208		601	498			999				738
	sniert teagnol	ı			t			1			Н	1			13			C p		13		4	2		13	44		14	\dagger	7	3			4.5	Н	12	45	\dagger	Ť	13				
A→B	Tracks for acceptance of the	13	4 6	۳ ا		2			m m			1	4		2 and 3		200	7 and		2 and		S and 6			2 and 3	3 and	2	3 and	(2 Pac V	- a			4 and 5		1 and	4 and			2 and				3
Direction	Maximum permitted train length		299	838	900	693		862	746	785		000	655		530		710	01/		788		202	701		615	559	662	648	223	110	8			574		753	543		I	571				744
pəəds	Left track	=			١,	0			0			30		100		8	20		70	2		120		20		30	١.											100						
Maximum permitted	Right track	101	100	2	;	100		•	100				70					30				120		30		100	30	١	9	Ť							-	100						
	Railway line categor	6	4 5	5 2	7 7	D4	4	4	4 2	7 7	7	4 2	_	7	D4	4	4 5	5 2	5 2	7	Ь,	<u> </u>	7 7	D4	4 2	5 2	7	4	4 2	5 2	2 2	14	7	7	4	4	_	<u>점</u>	4 2	4	7	4	D4	4
	Class of railway line	+	\vdash	+	+	+	-	+	+	N N	\vdash	+	+	+	Н	-	+	+	¥ >	+	\vdash	M	+	Н	-	M M	_	\vdash	+	+	+	M M	+	+	M	\vdash	\rightarrow	+	+	M	-	-		\vdash
	Single/double-track l	\vdash	\vdash	2 00	+	Н	\dashv	\top	S	+	\vdash	$^{+}$	+		Н	_	\pm	$^{+}$		+	\vdash	\top	+	Н	$^{+}$		+	\dashv	S	$^{+}$	+			-	П	\vdash	\neg	\neg		+	+	\vdash	D	
	Type of service point			-	3 .	1	3	2 .			3	e .	1 2	3	Н	+	+	7 2	+	+	Н	9 -	+	3	1 0	+	2	1	m	+	+	+	3	-	3	_		+	E 6	+	3		3	
																																								T				
	Name of service point	\$	47+748 VLAŠKO POLJE	53+110 MLADENOVAC 60+056 KOVAČEVAC	62+925 RABROVAC	67+550 KUSADAK	70+320 RATARE	74+000 GLIBOVAC	78+564 PALANKA 85+570 Mai a Pi ana	90+434 VELIKA PLANA	000 STARO SELO	725 NOVO SELO	100+302 MARKO VAC 106+313 LAPOVO VAROŠ	100 LAPOVO MARSHALLING YARD	109+600 LAPOVO	114+100 BRZAN	116+975 MILOSEVO	120+500 BAGNDAIN 126+050 I ANIČTE	120+950 LAMS1E 131+305 BITKOVČE	237 JAGODINA	140+700 GILjE	145+981 OPEN LINE JUNCTION CUPRIJA	163+670 SIKIRICA/RATARI	166+600 DRENOVAC	171+600 CICEVAC	1/3+900 LOCLINA 176+310 STALAĆ	181+900 STEVANAC	186+486 BRALjINA	190+400 CEROVO/RAZANj	192+210 STANO INOBANEVO	93 VITKOVAC	400 DONII LIUBES	203+500 GORNII LIUBEŠ	205+617 KORMAN	000 TRNjANI		197 ALEKSINAC	217+468 NOZRINA	218+785 LUZANE	705 GREJAČ	227+950 SUPOVAČKI MOST	229+309 MEZGRAJA	232+590 VRTIŠTE	139 TRUPALE
	Ohainage	4										I.																				1												
	Distance in km	3	6,240	6 046	2.869	4,625	2,770	3,680	7,006	4,864	3,566	3,725	6.011	1,688	1,599	4,500	2,875	6,56,6	0,030	3,842	5,463	5,281	*8,582	2,930	5,000	2.710	5,590	4,586	3,914	7.73	4 2 54	2.207	2,100	2,117	2,383	2,480	3,717	3,271	1,317	0,635	5,245	1,359	3,281	2,349
transport	Left track	5				6					Г			.48	81.	60'	ε0	_					.48	81.6		28.5 7961		•	-				066	51.5	0.1	0	T		'†	881	.60	.£0		
		1				~	A.				i .														- 1	. VV					1													-
Date of handover to public	Right track					03.09	1884				-+	561	.80.	60	.174	(I.I	0.6	0 :24	II m z	04.00.			(.04	1.20.	97.	.9.£ ₽881		03 0	1884			٠.	†20	81.4	90, 8	<u> </u>	\top	_		366I	i.cu	67		



	9butitlA	30	188,8	183.3	183	194,1		104	161		201,6		211,5	T	2170	220.0	248,2	255		282,6	306 0	000	324,4	333,3		346 7	367.5	371.9		383,0	397,7	427.2	450 2	4,00			000	178.9	0,041	124.6	13,4	į	1/8,0
	Loading gauge	59	ŽS-I	1-SZ	ŽS-I	ŽS-I	S-I	ZS-I	1-SZ	ŽS-I	ŽS-I	Н	ZS-I	1-2	1-67	+	H	ŽS-I	ŽS-I	ZS-I	1-67	ŽS-I	ŽS-I	Н	ZS-I	1-S2-1	1-SZ	ŽS-I	ŽS-I		I-SZ	1-0	1-SZ	+			ZS-I	ZS-1	+	S-I	ŢS-I	ŽS-I	ZS-1
the line [daV]	←	28	2 2	9	+	- 2	Ž	, Z	7	7 2	- 2	Ž	1 Z	7 20	1	-	1 Ž	2 Ž	Z	- Z	1 1	7	- 7	7 2	Z	7 2	+	+	Ž	3 Ž	1 Z	1		+.	4	H,	+	7 2	+	10 Ž	\vdash	Z	- 6
Ruling resistance of	\rightarrow	27	2	,	3	2		4	٠		2	П	5		0	4	5	9		7	0 00	•	7	7		7	7	9		5	3	×	13	1			13	13	=	,	8		11
gradient	Slope	-	2 1	4	+	0	-	1 0	10	0	0	-	+	+		0	Н	1	-	۰ ۳	- 0	4	\vdash	Н	+	0 4	+	4	4	3	-	7 -	0	+		\vdash	_	7 4	+	6	\vdash	+	0
RulinA	lncline			0 0		88 2	-	2 4	1	2	11	Ш	_	7 0	2 6		2,8 5	11 6			0 00,	7	15 8	\perp	2	0 0		2 5	5	5,	\perp	0 011		_	4	4,9		9 0 9		0,1	\perp		8,7 9
	Minimum curve radio		950 5,48	295 2.86		ω 1,58	2000	2000		4000	20000 0,91	l I	1000 2,44	000	0 171	\perp		327 4,31		1	300 3.7		300 5,45		950	900		450 0,92	1	350 7	350 2,09	- 1	400					3000			300		350 2
	dispatching of passen operations	-		P/F		Ь	+	P 2	, T	Ъ		Н	+	+	, a	+	Н	P/F	д	P/F	A 0		P/F	Ь	<u>д</u>			P/F	Ъ	P/F	J/F	<u>,</u>	P/F			Ь		J, 0	<u></u>	- d	Ы	д г	<u>ч</u> е
nce and	Open for the accepta			+	-		4		1		-	Н	4	1		ľ		-	4	4	_	_	-	Н			\perp	\perp		_	_		\perp	+		Ц	_	1	1	_	Ш	4	_
	Occupancy of service		Д	Д	_	D	+	ρ	+	+	n	Н	Þ	+	=	0 2	Н	Ω	_	E	=)	I	H	+	=		+	-	Ъ	+	-	0 0	+	-	Ы	D	7 E	_	Þ	D	4	0 0
mrotte	salas no maior i	\vdash	S	SÆ	-	S	4	v	2	\perp	S	Н	S	+	+	S		S	4	SÆ	+	\vdash	S	Н	+	+	+	S		S	S	+	S.	2		Н	+	+	\perp	\perp	Н	\dashv	+
	Freight car scales	10	0	+		2	4	m -	, ,	1 60	4	2	9 0		× ×		0	_	2	e .	+ 4	0	9	7	00 0	0 0		1	2	3	4 7	0 4	2					7 6	0 4	4	5	9	- 00
	Service point code -		12550	12551	12301	12302	12304	12303	11002	11003	11004	11005	11006	1100/	11008	11050	11010	11011	11012	11013	11015	11029	11016	Н	11018	11010	+	11021	11022	11023	11024	11026	11027	11028		16103	,	15603	+	15604	15605	15606	+
he service point	Manner of securing t	17		+	-	1		-	+		1	Н	-		-	-	1	1		-	-	1	-	-		-	+	1		-	-	-	+	1		-1		-	+	-	-	┽	
noitelu	ger offert to renneM	16	AB	AB with TWT	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	KC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	station distance	ka Plana	!	AB	PC mith AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB
B→A	acceptance of the longest trains	15	3	3		1					2 and 3		2		-	2	1	4		e (0 0	1	3	1		C	2 6	2 and 3		3	-	-		,	Mala Krsna - Velika Plana	5	,	4 %	2	and 2	3		7 7
Direction	rain length	14	662	488	543	949		601	1		623		632		750	648	069	526		648	708	3	899	865		653	648	650		623	203	284	609	2	ala Kr	702	200	673		801	714	-	603
	acceptance of the longest trains Maximum permitted		3	3		1 (4	t		and 3		2 6	+	-	4		4		t	0 0	t	3 (7 6	L		3 (_				Jajinci - M	4		4 %	+	1	3	-	2 0
Direction A→B	train length Tracks for	2	989	490	580	959		009	3		608 2 a		639	+	33	695	989	537		889	9 0	3	572	858		651	+	-		618	43	289	610		Rakovica - Ja	702		/10	-	815	711	+	900
pəəds	Left track Maximum permitted		9	99	5	9		9			9	Ш	9		7	9	9	5		9	7		5	∞		9	ی او	9		9	9	9	9			7	-	7		8	7		0 5
Maximum permitted	Right track		20	30				20				30	3	S	20		100	99		20		30			8	2			06		20	95	1	40	d centar)	80	09	8			9		
	Railway line categor	6	7	4 4	7	<u>7</u>	7	4 2	5 2	7	7	7	점 2	4 2	2 2	7	D4	D4	7	4 2	5 2	7	74	7	점 2	4 2	5 2	7	D4	7	7 2	5 2	2 2	7	Beograd	74	4 2	4 5	5 2	2 2	74	4 2	4 4
	Class of railway line	\vdash	M :	-	+	M	\rightarrow	M	1	1	1	M	\rightarrow	+	Z >	+	\vdash	-	\rightarrow	M :	+	_	₩	M	-	-	+	+	-	M	+	-	. N	+	-	\vdash	_	_	_		\vdash	-	MM
	Single/double-track l		+		+	Н	\dashv	S V	+	+	+	Н	S	+	+	S	Н	\dashv	\dashv	+	2 00	+	\vdash	\vdash	+	+	2 00	+	┢	S	+	2 0	+	+	+	S	\pm	20	+	+	+	\dashv	s s
	Type of service point	Н	_	7 -		2	\dashv	m -		+	_	3		+	0 0	1 -	2	_	23		7 0	+	_		20	2 0	+		3			0 0	1 -	3 6		Н	9 ,			2 2			7 -
																																1											†
	Name of service point	5	241+005 CRVENI KRST	JUNCTION POINT 1 - 3 NIS NIŠ	249+462 MEĐUROVO	253+946 BELOTINCE	255+441 ČAPLjīNĀC	257+010 MALOSISTE	KOČANE	265+854 PUKOVAC	267+942 BRESTOVAC	270+834 LIPOVICA	PECENJEVCE	ZIVKOVO	280+500 FMBOJ LESMOVACAL	287+568 LESKOVAC	295+779 DORDEVO	GRDELICA	308+610 PALOJSKA ROSULjA	312+725 PREDEJANE	327+886 MOMIN KAMEN	SELINCE	VLADIČIN HAN	334+066 SUVA MORAVA	336+135 LEPENICKI MOST	339+055 STUBAL 341+437 PRIBOTVR ANSCKT	348+015 VRANISKA BANIA	VRANE	361+415 NERADOVAC	365+725 RISTOVAC	373+692 BUJANOVAC	LEI OVICA BITK AREVAC	392+309 PREŠEVO	400+452 STATE BORDER		0+706 RAKOVICA	3+708 OPEN LINE JUNCTION K1	10+910 JAJINCE 16+377 RELI POTOK	DELI FOLOR ZITCE	ZUCE	VRČIN	27+840 KASAPOVAC	31+205 LIPE 36+894 MALA IVANČA
	Spanish		241+005	242+741					263+261							1							329+591								373+692	386+550	302+309				•			21+242			
	Distance in km	3	6,066	0.842	5,879	4,484	1,495	1,569	1 810	2.593	2,088	2,892	4,730	3,207	1,409	5.593	8,211	6,084	6,747	4,115	3 215	3.452	3,253	4,475	2,069	2,920	6 578	6,191	7,209	4,310	7,96	7,020	5 750	8.143			3,002	*1,581	4 073	0,892	3,643	2,955	5,425
handover to public transport	Left track	2	03.09.1884.	.6	Ī															1888.																	20.10. 1988.						
Date of	Right track	1	03	0.50																																	20.						



	9buiti1A	30	135.4	100	123,4	108 5	98.9		83.0		83.1			83.6	3	92,6	99,8		1100	1763	120,5	84,96	142,2	81,2	6,67	82,1		82.6			22	84,73	83.63	83,83	87,58	109,86	109,93	109,9		
	Loading gauge	50	ŽS-I	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	1-SZ-1	ŢS-I	ZS-1 ŽS-1	I-S	ŽS-I	ZS-I	ŽS-I	ŽS-I	ZS-I	1	1 2	1-07 70.1	1-2	ŽS-I	I-S	ZS-I	I-SZ	I-S	ŽS-I	ŽS-I	ŽS-I	ŽS-I	I-S	1-67	I-SZ	ŽS-I	+	ZS-I		\vdash	ŽS-I	ZS-I
[Visb] anil adt	←	28	0	+	5	7	4	+	2 2	Z	1710	4	7	7		Н	4 4	-	- 10	1	1	-	9	13 2	2 2	0 2	Z	7		Ž	7	- 0	1 2	1 2	+	+	2 2	Н	Z	7 12
Ruling Tesistance of	\rightarrow	27	Π.		,				,		\top	3		-		5	∞ c	h	c	,	1	10	8	-		2		9			Ų	^ -		-	4	9 4	2	2	1	
gradient	Slope	26	o	,	4	V	4		4			3		-	•	1	4 <	-	•			0	\vdash	13	^	0		7			t	- c	1	1	4	9 4	2	2		
Ruling	Incline	25	0		2	0		1 1	7 0	\perp	\perp	2		-	•		8 0	9	•	۰	-	10	1 1		9	0 2	-	9				n -	1 1	6 1	5	0,0	2 0	1 1	4	\perp
[%] u	Gradient of the statio	24	0.8		2,2	2.0			0.7			1,4		0.6		4,6						4,1			0,0	4,0		0,0				0,0								
sn	Minimum curve radii	Ш	350		700	2007	1000		280			700		1000		800	800	8				4500	3500	3500	MCI	1200		200			000	2000	2000	0009	2000	2000	20000	20000		
	Open for the acceptal dispatching of passen operations	22	ď	ч	Ь	۵	4 4	Ъ	P/F		<u>а</u>	Ь	Ъ	<u>д</u>	ч	а,	P D/F	1//1	D/E	D/F	1/1	P/F P	Ь	r	4	Ъ		Ь				c	ъ,	Ъ	Ь	P D/F	P	Ь		
e point	Occupancy of service	21	Д	•	n	E	ы		Д	Ш		n		Д	•	n	n a	1	٥	4 0	4	4	U	ם	>	U		C				-	ם	U	Ъ	ם	n	U		
ацоци	Side-\end-loading pla	\vdash			Ш				v.		_	L		v	2		v	2	ŭ	ט מ	2	S	Ш					ш				1				Ü				
	Freight car scales	-		-	Н	-	-		+	\sqcup	+	-		+	-			-	H		-			-	+		+				-	+	-			Vec			4	+
OIC	Service point code - I	18	15616	15610	15611	15612	15614	13509	13551		13502	13503	13508	13510	13505	13506	13507	10-61	13351	13310	01001	16503	16802	16805	10900	16807		16808				22202	23303	23304		23404	23407	23409		
the service point	Manner of securing t	17	-	•	-	-	-	μ.		-		-		-	1	-		•	9	-	-	= =	=	= :	1	11		1			;	= =	=	11	Ξ	===	==	11	_	
noitslu	gar offtert to renneM	16	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	AB	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	Paraćin	action dictance	etation distance	Subotica - state border - (Kelebia)	RC with TWT	RC with TWT	RC with TWT	RC with TWT	with	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	DC with I W I	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT
V←q	acceptance of the longest trains	15		,	3	~	2		4			2		2	+		2 -			7 4	- state bo	5 and 6 1 and 2	1 and 2		1 and 2	2 and 3		4 and 5				1 and 2	and 4	3 and 4	4 and 5	3 and 4	3 and 4	1 and 2		
Direction B→A	train length Tracks for	4	610	1	617	000	586		633			545		610		476	689	a - Cui	167	707	botica	443 5	694 1	-	747	725 2		493 4			\dashv	720 1	3	670 3	\neg	+	683 3	\vdash	+	
	longest trains Maximum permitted		9	-	9	-	2		9		+	2		9	+	4	5 0	Ćuprij	_	+	7 .		Н	+	+	Н	+	+	⊢		_	+	+	Н	\dashv	+	+	Н	+	+
A←A	Tracks for	13			3	~	2		4			2				8	2 %	nction	2 2004	5 2010 4	Novi Sad	1 and 2	3 and 4	7	5 and 4	4 and 5		4 and 5				5 and 4	1 and	1 and 2	2 and 3	3 and 2	and	3 and 4		
Direction	Maximum permitted train length	12	624	170	612	630	602		629			545		809	3	581	594	04 (Jagodina) - Open line junction Cuprija - Cuprija -	240	240	1.0		694	242	747	636		492			020	020	311	099	531	739	735	206		
pəəds	Left track	11				_	,							0				- Op		_	ara P		200		160	100	2	100	95	120	180				200					100
Maximum betimised	Asent track	10	80			100	•			20				100				odina	50	100	rr) - S		200		160	100	2	100	95	120	180				200					100
, ,	Railway line categor	6	<u>4</u> 2	2 2	4	4 2	7	4	4 4	7	7 7	7	7	7 2	7	7 2	4 5	† (Jage	2	5 2	ad Centar) - Stara	7	-	7 2	4 4	\vdash	-	7	_	\vdash	<u>4</u>	5 2	2 2	7	_	_	7	7	\dashv	4 4
	Class of railway line	\vdash	\vdash	_	\vdash	-	+	+	_	+	_	-		M	+	\vdash	+			Z >			-	_	Z Z	\vdash	×	_	₩	\vdash	_	_	+	\vdash	\rightarrow	M	_	\vdash	\rightarrow	Z Z
	Single/double-track I	П	S		П	S U		\Box	S S	\Box	S S		П	S V	\top	П	S U	2		מ מ	⊣e		Н	-	ם		\neg		-	D		ם ב	\top	D	\neg	חנ	1			
	Type of service point	Н	3	3	_	e c	+	Ш	12	12		+	3	3	3	_,			9 -		1 2		-	9 -	1 6	\vdash	9 5	_	\vdash		6 .			-				Н	\dashv	6
									+	Ħ							t	1										+				+								
	Chainage Name of service point		39+600 BRESTOVI 41+300 MAII POŽAREVAC	43+167 DRAŽANj/ŠEPŠIN	47+771 UMČARI	52+315 ZIVKOVAC 55+210 VODANi	60+609 KOLARI	66+570 RALJA SMEDEREVSKA	69+608 MALA KRSNA	70+264 JUNCTION POINT 28 MALA KRSNA	71+995 SKOBALj 74+765 OSPAONICA	76+202 OSIPAONICA	77+817 LUGAVČINA	81+417 SARAORCI 82+767 LOZOVIK/SABAORCI	87+717	90+226	94+639 VELIKO ORASJE 00+706 VELIKA DI ANA	ON VELLEN LEARNER	0+000 OPEN LINE JUNCTION CUPRIJA	7-420 DAR AĆN		34+944 CTAPA IIA3OBA 42+862 INPITA		62+058	70+212 KM 70+212 SC	70+870 PETROVARADIN			79+123		82+304 KM 82+304 SC	84+044 KUMENKA	97+300 STEPANOVIĆEVO	102+514 ZMAJEVO		129+523 LOVCENAC - MALI IĐOS 143+536 BAČVA TODOI A	157+145 ŽEDNIK	166+519 NAUMOVIĆEVO	168+401 KM 168+401 SC	172+282 KM 172+282 SC 175+305 BLOK 1 SUBOTICA
	Distance in km	3	2,706	1,867	4,604	2 004	5.390	5,961	1,230	1,196	1,731	1,437	1,615	3,600	4,950	2,509	4,413	00000	00500	6 000	025,0	7.918	11,170	8,026	4,400	0,658	1,511	*0.210	2,113	1,561	1,620	1,740	6.893	5,214	11,096	15,913	13,609	9,374	1,882	3,881
public transport	Гей изск	2	01.06	24.									10 12	1886.			_						10 17	1883.		•									23.10.1961.					
		П	-	0									0	š				1	1			1	0	, š											10					



	9butitl A	30		113,62		188 3	601			199	207	2, 12	219.5	235,3			265		267		286,9	314				341,6	3 69 5	700,7		416,5			445,8										77.0	77,1
	Loading gauge	29	I-SZ	1-S7	ZS-I		ŽS-I	ŽS-I	ŽS-I	1-07	75.1	ŽS-I	ŽS-I	ŻS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	ZS-I	ZS-I	ZS-I	ZS-I ŽS-I	ZS-I	ŽS-I	I-SZ	ZS-I	1-67	1-57	ŽS-I	ŻS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I			ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŻS-I	1-65	I-SZ
the line [daN]	←	28	-	+	2 2	-		~~	\vdash	4	-		-	-	7		-		-	-	,	-		~~	-	-	7 1	,		1			9	-			-		10	-	8		+	2 4
Ruling resistance of	\rightarrow	27		0	∞		t		1	0	4	+	5	00			7		2		9	7		П		7	,			00			10	12			,	П	4	T	-	١.	1	
gradient	Slope	26		~	2		2	0	0	0	-	0	-	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	9	. 0	-	-	0	5	0	1		4		8	T	8		7	, ,
Ruling	Incline	25		0	00		2	4	5	7 0	4	. 0	5	5	5	5	9	0	3	5	4	9	00	3	5	2	- 4	9 4	- 9	000	5	9	10	11			0	П	3	T		1	7	0
[%] u	Gradient of the statio	24		1,3					000	7,7	25	ì		3,09			0,0		0,0		4,9	0.0				6,4	00	0,0		8,5			9,5			0,0			I	T	T		00	0,45
sn	Minimum curve radio	23		300	300		300	200	200	3000	1000	310	300	300	300	300	200	450	200	009	497	300	400	400	009	495	200	550	0	3000	700	200	200	300			300	009		200	800			009
	Open for the acceptar dispatching of passen operations	22	н	۵,		D/F		Ъ	6	١,	۵	۵,	Д	Ь		Ъ	Ь	Ъ	Ь	Д	Д,	4 4	Д	Ь	Ъ	Ь	D/G	T/L	٠ م	Ы	Ь	Ь	P/F			Ь	Ь	Ъ	Ь	Ь	Ь	۵,	7 00	P/F
	Occupancy of service	21	Д	۵,		Д	•		,	4	۵		n	Ь			Ь		n		Д	Д.				д	٥	4		n			Ь			Ъ	П	Ъ	Ь	T	Ы	F	ч р	ч д
mioth	Side-/end-loading pla	20	щ	ч		T/N	1																				ŭ	2		S			S/E		1			П	T	T	T	T	ŭ	2 02
	Freight car scales	19	Yes	7		Ė	T	T	Ħ	1	t	t		T						1	1	T	T	П	T		†			T			Yes				П	П	\top	\forall	\top	†	Ve	3
			\neg	2	66	17	;	01	-	70	2	50	90	07	80	60	10	56	::	12	13	15	16	17	27	18	2 5	21 5	22	23	24	25		-		52	53	54	13	10	15	90 5		
OIIC	Service point code - J	18	23450	23450	23499	12551		12401		12402	12404	12405	12406	12407	12408	12409	12410	12426	12411	12412	12413	12414	12416	12417	12427	12418	12419	12420	12422	12423	12424	12425	12499	12498		16052	16053	16054	16013	16016	16015	16006	10007	21001
he service point	Manner of securing t	17	=	Ξ		-			ŀ	+	-		8	8			00		8		9	00				8	v	>	1	9			9		1	1		Ħ	-	_		1	-	4
noiælu	ger of traffic reg		RC with TWT				AB	AB	AB	AB	AB AB	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	- Pančevo glavna stanica - Vršac - state border - (Stamora Moravita)		AB with TWT	AB with TWT	AB with TWT	AB	AB	AB	AB	station distance
V. a	acceptance of the longest trains	15	1 and 2	1 and 2	1	goman)			,	.	4			2			and 3		and 3		2	2 and 3				2 and 3	7 204 2	C DITE		2 and 3			2		order - (3	П			1	2	·	/	2 and 3
Direction B→A	train length Tracks for	\vdash	\dashv	\dashv	-	-(Dra	2		9	2	9	2		4			2	_	2	+	-	_	_		\neg	_	\top	\top		626 2	1		-		tate bo	00		Н	+	+	7	+;	+	
	longest trains Maximum permitted	\vdash	+	405	-	border -	-			000	009	3		524			3 603	\dashv	3 614		791	3 713			\dashv	3 624	2 674	+			\vdash		711		ršac - s	0 400	H	Н	\dashv	+	269	-	+	3 471
Direction A→B	Tracks for acceptance of the	13	1 and	1 and 2		106 Niš - Dimitrovgrad - state border - (Dragoman 400 3 488 3	1		•	^	4			2			2 and		2 and		2	2 and				2 and 3	, par	7 allu		2 and			2		nica - V	8 and 10					3	,	1 200	2 and 3
Tirection	Maximum permitted train length	12	800	404		trovgrad 400	2		000	000	200			524			603		614		791	713				624	109	170		626			710		avna sta	364					269	7.73	0/3	471
peeds	Гей таск	11	100		200	- Dim											30														00			80	evo gl)	9	2		50	;	09	100	20
Maximum	Right track	10	100		200	06 Niš											3														^			8	- Panč	05	3	70	2			100		3
A	Railway line category	6	7	7	점	=	<u>D</u> 3	<u>D3</u>	D3	3 2	3 2	2 2	D3	D3	D3	D3	<u>D</u> 3	<u>D3</u>	D3	<u>B</u>	2	2 2	D3	D3	D3	2	3 2	3 2	2 2	2	D3	D3	D3	7	Centar		7	7	7	7	7	7 7	<u> </u>	7
	Class of railway line	8	M	Σ	M		M	M	M	Z	Z	M	M	M	M	M	M	M	M	M	Ŋ,	M	M	M	M	M	Z	2	M	M	M	M	M	M			M	M	M	M	M	M	Z	×
əui	Single/double-track li	7	Q	۵	Ω		S	S	S	2 0	2 00	S	S	s	S	S	S	S	S	S	S	s s	S	S	S	S	2 0	2 0	S	S	S	s	S	s	107 Beograd	Т	D	D	D	Ω	Q	O C	חני	S
	Type of service point	9		_	13	-	12	3	3	- ~	, -	3 .	2	-	3	3	2	3	-	3	_	2 3	3	3	3	7 ,	n -	- 6			3	3	-	13	107	-	7	3	7	3	2	. 3	٠,	
	ta																																											
	Name of service point	5	175+781 SUBOTICA TERETNA	1/6+550 SUBOTICA	184+635 STATE BORDER	0+241 NIŠ	0+736 JUNCTION POINT 4 NIŠ	1+766 PALILULSKA RAMPA	3+400 VOINA BOLNICA	5+401 CELE NULA 6+200 FI MŠ	10+500 NIŠKA BANJA	14+700 PROSEK	17+148 SIĆEVO	22+509 OSTROVICA	23+759 MAJDAN OSTROVICA	29+500 RADOV DOL	31+700 DOLAC	34+300 CRVENI BREG	36+426 CRVENA REKA	39+680 BELANOVAC	44+912 BELA PALANKA	48+500 CRKVICA 53+500 CIFLIK	56+800 SINjAC	58+800 DURĐEVO POLJE	61+900 CRVENČEVO	63+817 STANIČENJE	0/+300 SOPOI	76+900 BOŽTRAT	81+700 VELIKI JOVANOVAC	86+193 SUKOVO	90+500 ČINIGLAVCI	92+700 SREĆKOVAC	97+423 DIMITROVGRAD	103+930 STATE BORDER		0+000 BEOGRAD CENTAR	1+232 KARAĐORĐEV PARK	2+800 VUKOV SPOMENIK	4+688 PANČEVAČKI MOST	7+100 KRNjAČA MOST	8+120 KRNjAČA	9+981 SEBES	12+492 UVCA 20+200 BANČE370 CI AVMA	18+206 PANČEVO VAROŠ
	Chainage				8,085 184+63	0+04	0.495 0+73			0.730 6+20					1,250 23+75						5,232 44+91						5,485 0/+50							_		00+0				2,412 7+10			*7.621 12+49.	
	Distance in km	3	0	o'	∞`		0	1	1	7 0	2 4	4	2.	5,	1,	5,	2,	2,	2,	εí	5	w v	3.	2,	3,	1	7		4	4	4	2,	4	6			1	1		2,			*7	+
public transport	Гей изск	2											01.06.	188/												:	1007	./00								.£6	61.	.co.	53					11.10.1935.
Date of handover to	Right track	1											0	_													7 -	•								.£6	61.	.co.	53	5.	£61	1.11.	.11	11.1



1		əbminlA	30	146.0	120.0	95.4	81,7	87,6		102,3	82,0	105 3	171,1		153,3	117,9		35,3	93,7	100,0	110,9	123,6	145		106.4	264		388,5	501	107 1	411.0	4111,9	352,1			311,0				362.7	401
Secondary Column		Loading gauge	29	7. I	1-67	ŽS-I	ŻS-I	ŽS-I	ZS-I ŽS-I	ŽS-I	ŽS-I		ŽS-I	ŽS-I	ZS-I	I-SZ	ŽS-I	ŽS-I	ZS-I	1-87	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	1-SZ	ŻS-I	ŻS-I	ZS-I	1-S7	1-67	78.1	ZS-I	ŽS-I	ZS-I	ZS-1	75-1	ŻS-I	ŽS-I	72.1	ŽS-I
Part Part		←	28	0 0	7 11	. ~		7		4	5		- 1		6	6		2	m <	٠	1	3	-		-	٠,		1	1	71	1 2	2	6			∞		4			
Secondary Seco		\rightarrow	27	۷ 5	-	+		9		7	3	L	12	Ц	9	_ '		3	2		4	4	7		۰	17	L	16	17	+	+	_	,			1		8		٧	13
Secondary of the control of the co		Slope	70	2	1 5	3 ∞		7	_	4	5	L			∞	∞	1	4	ω <u>-</u>	۲	-	2	-	Ш	-	+	+	\vdash	_	+	+	+	∞		\rightarrow	+	1	0	Ш	•	_
Secondary Comparison Comp	Kuling	Incline	_	_	_	_			2 0	2	3	~		Ш	9		\perp	Ш	4 4		3		7		7		1			-			0	Ц			1	∞		- 1	- 1
1	[%] u	Gradient of the statio	42	1,3	'n	9						ľ	2,1									-			ć	7		2,	2,	ľ					1	,				-	-
Secondary of the control of the co	St		23	300	350	350	009	009	200	300	1905		300		400	400		400	450	100	500	450	500		009	300		300	300	300	300	200	200			200				200	400
1965 1975	nce and gers/freight	dispatching of passen	22	P/F	7/7	ы	Ь	P/F	Ы	P/F		D/F	P/F	Ь	<u>а</u>	r P/F	Ъ	P/F	P/F	1/1	P/F	P/F	P/F	Ь	P P	P) P	<u>م</u>	P/F	م ا	٦ 2/0	D/C	T/L	۵,	Ь	a	P/F	۵	P/F	ם	P/G	P/F
1965 1975			77	-	o 🗚	, H	1	b		Ъ	T	۵	ņ		b	þ		n	d F	-	H	n	n		٥	4 10	,	n	ь	F	9	4	þ	П	-	٦,		n		:	0 04
1965 1975	mroth	side-/end-loading pla	200	20	2 0	2 02		S		S/E	\exists	v	S	П	T	S		S	S O	2	S	S	S		ŭ	2	T		T	T	ŭ	2	T		-	S	T	T		T	S/E
1 1 1 1 1 1 1 1 1 1			+	$^{+}$	$^{+}$	+		Н	+		\dashv	F		Н	$^{+}$	+	\forall	П		+			+		\top	+			\top	+	\dagger		$^{+}$	Н	1	Se	+	t		$^{+}$	-
1881 1881 1882	OIIC	Service point code - J	18	21002	21003	21005	21006	21007	21008		21099	15501	15201	15202	15203	15205	15206	15207	15250	50761	15260	15211	15213	15214	15215	15101	15112	15102	15103	15104	15106	15100	15107	15116		\top	15111	15110	15114	15100	15151
18.90 1.50	he service point	Manner of securing th	17		- 0		8	\vdash	$^{+}$	7	\forall	-		Н	-	-	H	-		-	-	-	-	П	-		+	-	-	-	٠,	+	-	Н	١,		+	-	Н	-	
1981 1982 1984			\top	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	Bijelo Polje)	RC with station distance	RC with station distance	C with station distance	C with station distance	RC with station distance	C with station distance	RC with station distance	C with station distance	RC with station distance	RC with station distance	C with station distance	C with station distance	RC with station distance	C with station distance	RC with station distance	RC with station distance	AC with station distance	C with station distance	C with station distance	C with station distance	RC with station distance	C with station distance	RC with station distance	AC with station distance	C with station distance	RC with station distance	RC with station distance	C with station distance	RC with station distance
1988 1998			2 5	10.3	4 4	1d 3		1d 3		5 pi				24	E4 P	1 12	<u>~</u>			t	T		T	24	1		T		1	4 0	t			24	1	†	4 12	T	P4 1	†	
Page Page		Тгаска гог	\neg	\top	$^{-}$	+	-	\vdash		+	_	tate bor				3	\square			+					_	+				-		_	3		_	\perp					1
Page Page		Maximum permitted	+	+	+	+	\vdash	\vdash		+	_	nica - s	595		268	574		594	706	700	652	601	602		503	520		995	544	653	200	-	549			049		553		562	552
Page Page		acceptance of the	13	2 and 3	3 and 4	2 and 3		2 and 3		4 and 5		ga - Vrb	4		3	3		3	4 c	7	4	3	3		-	5		3	3	2	٧		3			×		3		3	· ~
Page Page	Direction	train length	12	003	530	662		999		643	,	k - Pože	594		171	572		594	689	3	649	865	009		905	553		268	543	133	544	Ę	551		900	04/1		554		2,66	558
Page Page		Гей изск	=				9					- Resni			5		Г	_		5			9								0							_	2		
Page Page		Right track	10				10				2	entar)	7		80			6		6			10								S							•	3		6
Page Page	A	Railway line category	9 ع	20 25	20 50	2 2	D2	D2	20	D2	D2	grad C	7	D4	72	2 7	<u>D</u> 4	D4	7 5	2 2	74	72	7	D4	2 2	2 2	7	<u>7</u>	7 7	3 2	5 2	5 2	7	<u>D</u> 4	7	7 5	5 2	7	7	7 5	7 7
Public public		Class of railway line	» ;	Z	Z >	M	M	M	×××××××××××××××××××××××××××××××××××××××	M			M	M	M	M	M	M	M	ĭ N	M	M	M	M	M	M	M	M	Z,	Z	1 2	Z >	M	M	M ;	Z >	Z	M	M	Z	M
1894 1894	əu	Single/double-track ii	_ 0	20	2 0	2 02	S	S	S S	S	S	108	S	S	S	2 2	S	S	S U	2 00	S	S U	2 02	S	S U	2 02	S	S	S	20	2 0	2 0	S	S	S	20	2 0	S	S	20	2 02
1894 1894		Type of service point	٥,	_ -			3		8 9	, _	2	-		3	2 6	2 0	3	-		1 0		1 0	1	3	e -	2 2	3	_	7 0	2 -	١.	3 6	, _	3	۳,		2 ~	2	e .	ς -	
Column C																																									
1994. 1 1998. 1 1 1998. 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Name of service point	S STATE OF THE STA	BANATSKO NOVO SELO	AT IBITNAR	3ANATSKI KARLOVAC	NIKOLINCI	ULjMA	VLAJKOVAC	VRŠAC	STATE BORDER	PENIK	SELA REKA	NENADOVAC	BARAJEVO	VELIKI BORAK	LESKOVAC KOLUBARSKI	STEPOJEVAC	VREOCI	ZM 46+900 SC	AJKOVAC	SLOVAC	OIVCI	UUKAVAC KOLUBARSKI	IVERAK IAI EUO	VALJEVSKI GRADAC	ESKOVICE	LASTRA	SAMARI	DRENOVACKI KIK	ZOSTEDIĆ	TIBIĆI	KALENIĆI	OTANj	GLUMAC	POZEGA TINICITION BOINT 53 BOŽECA	SASNA	UZIĆI	ZLAKUSA	BUKOVICKA KAMPA	JŽICE TERETNA
1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		9gsnisd)			53+554	59+041	63+037				98+314	0+425						30+627		46+900	52+600										\perp					\perp	\perp				
15.5 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0		Distance in km	2	11.8(7 60	*5.20	3,99	7,30	4,90	1,05	15,40		7,21	4,50	3,5(5,19	4,64	2,88	6,65	1 51	5,70	6,38	3,25	2,08	4,45	4,0,4	7,03	2,44	90,6	4,5	757	4.51	6,44	3,75	2,20	1 70	3.11	3,66	2,23	2,1	4.92
			$^{+}$	_	\top	-				_	oj.						广				_					\top	_				_	_				_		_			•



Secondary Seco		əbuitilA	30	418,4	5,026		631		784	612.5		531,5		390,3		447 7	,,	453,2			505,2	561,5	223,7			109		129,5			153.0	171,6		200,1	236,5		241,9	239	216		210,3		18/,/		202,4
1		Loading gauge	53	-S-1	70	S-I	I-S	I-S	S-1	7 2	I-S	I-S	S-I	S-I	- S	70	S-I	I-S	I-S	I-S	S-I	I-S:	7	1.0		I-S	I-S	S-1	1 2	I-S	I-S	I-S2	I-S	I-S	S-I	S-I	S-I	I-S	I-S-I	S-I	S-I	I-S-I	7 7	1-S	I-S
Secondary Seco	the line [daN]		+	,	1	1	- 2	+	+	-	+	\perp	7	17 2	7 10	+	+	-	H	7	1	+	+	+		-	Z		1		+		Ž	-	-	\dashv	\dashv	\dashv	+	7	5	+	+		\vdash
Secondary Column			\rightarrow	2 5	2		18	18	16	1		-	1			o	,	7	10		2	6	^ 0	0		3	1	9			10	6		8	=	\rightarrow	\rightarrow	4	e	1	3	\dagger	,	t	~
Part		Slope	56	0	>		0	0	2	17		16		17		~	,	3	7			0	0	^		2		0			3	2		0	0		10	3	∞	-	4	t	_		1
Second Column Col	Ruling	Incline	25	10	/1			17	16													- 1		0		- 1		5			00				- 1			3	-	-	2	- 1			7
Second Column Col	[%] u	Gradient of the statio	`																			\perp																							
Secondary Column	sn	Minimum curve radiu	23	400	nce		400		400	300		300		300		300	8	350	400		350	400	400			250		220			550	550		300	300		300	375	300		300	000	300		290
1	nce and gers/freight	dispatching of passen	22	a, e	4 0	Ъ	P/F	P/F	Ъ	4 4		Ъ	Ь	P/F	۲ p	P/E	P	Ъ	P/F	Ъ	ц	д г	٠,		Ъ	P/F	Ъ	Ч	4 0	Ь	д	P/F	Ъ	P/F	Ч	Ъ	P/F	Ъ	P/F	Ь	P/F	Р	P/F D	Ь	P/F
1985 1985	mioq e	Occupancy of service	21	٦ ;	>		D	D	Þ	Þ		n		Д		Ξ)	₽	Ъ		Þ	٥	4	1	4	Д					n	Ъ		Д	Þ		Д	Þ	4	-	Þ	۴	24		Ъ
19 19 19 19 19 19 19 19	miom	Side-/end-loading pla	20											S					S							S						S		S	S		S	S	S		S	ē	2		S
19 19 19 19 19 19 19 19		Freight car scales	19																																										
19 19 19 19 19 19 19 19	nic	Service point code - J	18	15153	10/01	15717	15702	15703	15704	15706	15721	15707	15720	15708	15722	15710	15718	15711	15712	15719	15713	15714	57231	C7/CI	13450	13201	13202	13203	13204	13206	13207	13250	13209	13210	13211	13212	13213	13214	13215	13221	13216	13217	13218	13220	13251
The color of the	he service point	Manner of securing th	17	_,	+	+	-	-	_	-	+	_	+	_	\dagger	-	4	-	-	Н	_		+	+	-	∞	7	∞	\dagger	\dagger	00	9		8	00	+	oo l	8	_	+	00	+	+	\dagger	4
Processor Proc			16	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	AC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	KC with station distance	station distance border - (Volkovo)		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
100 100			\top	+	+		Ħ			+	+	Ħ			Ť	Ť		f				+	+	- ts	91	П									\forall	\dagger	1	\dashv	+	\dagger	+	+	+		\vdash
10.50 19-1	B→A		15	- -	٦.		3	3	3	2	1	-		4		~		3	5		m	- 6	2	vić -	Sano	2		~			3	3		2	2		2	2	~	ď	2	•	7		4
10.50 19-1		train length	4 ;	9 5	+		39	98	31	36		72		23		40		20	66		25	96	#	Tanko	63	99		22			34	44		85	32		14	20	90		26	+	9	T	38
100 100		1-7,	- 7	3h 0	<u>^</u>		53	48	5	5		5,		5.		3	+	30	46		5.	90	Y	eneral	3 50	Н	-	7.			7	8		55	9	-	[9	9	×	-	35	-	-	+	7
100 100			13	- -	_		3	3	3	2	1	-		4		~		3	5		e .	,	2	olie - F	2 and	2		2			3	3		2	2		2	2	~	ľ	2	•	7		4
100 100	D, T, T,		12	353	C+C		539	486	531	550		574		551		551	100	307	495		553	738	24/	OSOTO	530	099		722			734	844		558	632		614	620	591		297		/40		738
100 100		Left track	=			20			0		20				ç	2					20			šak - K		6			9										4						
1905 194-280		Right track	10	_	_					_				_		_	_					_	_	- 00			_									_	_		_	_	_	_			
1905 194-280	A	Railway line category	6	7 2	5 2	7	7	7	7 7	<u> </u>	7	7	7	7	7 5	5 2	7	7	7	젇	4	2 2	\$ 2	2 E		\mathbb{S}	ဗ	3 3	3 8	8	\mathbb{S}	\mathbb{S}	C3	ဌ	8	ဗ	ဗ	${\mathbb S}$	8	8	8	8	3 8	3 8	\Im
Part		Class of railway line	∞ ;	≅ ;	≦ ≥	×	M	M	Z :	Z	×	M	Z	Z	≅ ;	Z	W	M	M	M	Σ	× ×	≦ ;			M	Z	Z Z	ĭ≥	M	M	M	M	M	Z,	Z	Z	Z	≱ :	Σ	Σ	≅ :	Z	Z	M
Part	əui	Single/double-track li	7	S C	מ	S	S	S	S	v v	S	S	S	S	S C	2	S	S	S	S	S	S C	20	2 200		S	S	S o	2 0	S	S	S	S	S	S	S	S	S	S	S	S	S	20	S	S
Part Part		Type of service point	9	- ,	7 6		2	-		2 6	3	2	3	-	n ،	٠ -	3	-	1	3	7	7	٠;			-			۰ ۳	3	-	1	3	1	(3	-	-		m	_	۳.	- ~		-
190.5 1,000		Name of service point		ICE	TANOVIĆA DOI :E	PKOVA	ŠICA	ANEŠCI	ATIBOR	SNICA ZLATIBORSKA STANICA	LEŠ	XPCI	CA	BOJ	LJICE	DOUSKA BANJA	JROVO	JEPOLjE	JEPOLjE TERETNA	LIKA ŽUPA	CICE	ODAREVO	BNICA	ALE BONDEN	POVO	TOČINA	ADAC	DNjEVAC	SININ ANAGOJEVACIA	ETOJEVAC	VANOVAC	AGUJEVAC	VOD	OŠNICA	AGOBRACA	CKOVICA	IÇ	UŽA	BEREVAC	MICA BRDO	TKOVAC	LAVCICI	ANOVAC	ČA	ALjEVO
10 17 18 18 18 18 18 18 18 18 18 18 18 18 18		SganiadO	4	163+881				185+225																_	0+666 LA																				
13.7 1.7 1.7 1.7 1.7 1.7 1.7 1.7 1.7 1.7 1		Distance in km	3	1,98	0,70	2,60	2,35	6,87	8,09	5 10	6,19	3,23	4,66	5,79	3,01	9,77	5.02	6,31	3,24	3,74	5,04	8,68	11,80	7,7		2,73	4,89	3,98	2,65	2.14	1.73	6,49	2,47	2,80	5,45	5,04	2,98	5,88	7,12	1,50	4,23	3,74	5.83	2.80	2,84
19 19 19 19 19 19 19 19 19 19 19 19 19 1		Гей таск	2			1		05.	76.								1	05.	.92									03.	87										12.	.62				1	_
		Right track						21.	19									21.	19									03	18										22.	19					



	əbmitlA	30	171.4	+,1/2	233,4	262,7	304,2	343,1	0 020	0,510	393		406,3	416.5	410,5			441	454	404		470	.01	491	496.6		497	7 20	85.1	85,3		86,6	87,8	2,00	119.6	118,3	124,6	124,7	124,5	119,3
	Loading gauge	50	ZS-I	1-62 ZS-1	ŽS-I	ŽS-I	ZS-I ŽS-I	ŽS-I	ŽS-I	I-SZ	ŽS-I	ŽS-I	ZS-I	ZS-1	1-67	ZS-I	I-SZ	ŽS-I	ZS-I	7S-1	ŽS-I	ŽS-I	ZS-1	1-SZ	ŽS-I	ŻS-I	ŽS-I		ŽS-I	ŽS-I	ŽS-I	ZS-I	1-67	76.1	S-I	ŽS-I	ŽS-I	ZS-I	I-SZ	ŽS-I ŽS-I
[Visb] anil adı	←	28			5	\dashv	6	-		1 1	-	~~	5	+	0					+	7	4	+	0 4	+			-	2	┢			0 4	+		5		4	3 2	9
Ruling resistance of	\rightarrow	27	v	-	5	8	0	8	c	0 5	5		5	V	0			∞	c	0		8	r	2	4				- 1	-		e (2		9	3		4	3	3
gradient	Slope	-	•		3	0	1	0	•	0	0		1	c	^			0	,	7		1	•	3	0				5	1		1	2	1	1	5		4	3	9
Ruling	Incline	25		-	8	9 /	7	9 0		4			4		+	L		9		0		0		0 4					0			0 3	n v	\perp			Ш	4	3	3
[%] u	Gradient of the statio	24	0		0,8		1,0	7,0		ř	2,2		0,4		4,0			0,0		0,0		0,0		0.0					0.2				0,0	\perp			Ш	2,5	2,5	
sn	operations Minimum curve radiu	23	300	7	300	300	250	300	,50	300	250		300	300	300			300	,	200		300	,000	300	300		300		3000	2000		2000	1000	000	3000	3000	1900		_	610
nce and	nsteasce and the nego nessed to guidetequib	Ц	D/G	P	Ъ	Ъ	러 러	P/F	Р	P/F	P/F	Ь	P/F	P P	I/I	Ъ	Ъ	P/F	Ъ	P/F	Ъ	P/F	Ч	P/F	P/F		Ь		P/F			P/F	P/F P/F	1/1	, д	P/F		P/F	P/F	P/F
	Occupancy of service	-	٩	+	T	U	Þ	Ъ	+	4	ď		М	+		-		Ъ	F	+		Ь	+		+		U		4	+		F- 6	14 P	_	'n	Ъ	Н	D	Ъ	<u>a</u>
mioin	Side-/end-loading pla	\vdash	ŭ	2	Н		+	S	Č	2			S	Č	2	H	L	Н	Č	2		S		v s	S			-	S	-		4	A/P		-		Н	+	+	S/E
	Freight car scales	21	+	1 2		+	S S	2	VO 1					7 0	+	_			2 0		-	50					7	-		_		2 (Vec	\top		-	5			0.0
OIC	Service point code - J	18	10101	12102	12103	12104	12105	12106	12115	12108	12109	12110	12111	12112	C1171	12117	12114	12001	12002	120021	12004	12005	12019	12007	12008		12022	25471	25470	25501		25502	25503	24401	24403	24404	24405	24406	24407	24409
he service point	Manner of securing th	17	٥	•	4	4	2	2	c	0 %	00		2	0	0	t		-		-					10		10		-	5		S	0 4	+	+	5		2	5	4
noitelu	gga officit to remack	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	longest trains	5	1	t	L					t				1		t			1		H		1		t			int)	d 4	d 3		d 3	0.0	7 7	d 3	d 4		d 3	d 3	d 3
B→A	Tracks for acceptance of the	15	,		2	2	2	2	·	1	2		2	(7			2	·	^		3	ŕ	1			1	-Œ	3 and 4	2 and 3		2 and 3	3 and 4	2 and 3	2 and	3 and 4		2 and 3	2 and	2 and 3
Direction	train length	14	63.1	100	727	630	658	586	24.4	1005	576		677	630	900			473	023	6/6		576	000	545	640		140	order	732	573		511	505	504	522	506		617	733	594
	longest trains Maximum permitted		+	+		Ť	_	31	+		-		_	+	+	+			,	_		**	-		+			ate bo	_	-		+	+	+	+	\vdash	Н		3	
A→B	Tracks for	13	,	٦	2	2	2	2	·	1	2		2	c	7			2		and		3	,	٦ -	-		-	70 - St	3 and 4	2 and 3		2 and 3	2 and 5	2 and 3	2 and	3 and 4		2 and	2 and	2 and 3
Direction	Maximum permitted train length	12	163	160	727	630	859	586	244	1005	576		657	003	000			479	+	610		587	975	551	630		137	110 Subotica - Bogojevo - state border - (Erdut)	730	+		+	505	+	+	\vdash	H	617	716	594
pəəds	Left track	11					6						6		•													otica	6						6	6				
Maximum permitted	Right track	10					40 (50)						50 (60)								50						10	110 Sub	30 (40)							40 (50)				
A	Railway line category	6	8	3 8	C3	C	ଅଅ	C3	3	3 8	C3	C3	ဗ	3 3	3 8	8	S	\mathbb{S}	2 2	3 2	D3	D3	2 2	2 2	ñ	D3	D3		\Im	D3	D3	2	3 5	ã	ã	D3	D3	2 2	2 2	2 2
	Class of railway line	8	×	×	M	M	M	M	M	×	M	M	M ;	Z	Z	M	M	M	M	Z Z	M	M	Z :	Z	M	M	M		M	M	M	M :	Z	×	M	M	M	M :	M	M
əui	Single/double-track li	7	S o	o S	S	S	s s	S	S	o s	s	s	S	S C	0 00	S	s	S	S	2 0	S	S	S	n s	s	S	S		S	s	S	S	מ מ	2 0	S	S	s	S	s s	s s
	Type of service point	9	12	3	1	2	3	-		- 8	-	3	- ,	e •	13	3	3			3	3			- 8	-	12		13	1	1	9		٠,	٠.		1	3	- ,	٦ -	3
	Chainage Name of service point	4 5	85+714 JUNCTION POINT 72 KRALJEVO	97+915 MATANOSMA DANJA 97+400 PROGORELICA	100+899 BOGUTOVAČKA BANJA	108+861 DOBRE STRANE	118+113 POLUMIR 123+600 PUSTO POL¡E	127+293 UŠĆE	132+800 LOZNO	138+313 PISKANiA	143+453 BRVENIK	147+600 RVATI	152+310 RASKA	157+700 KAZNOVICI	101+988 AUDINICA 164+400 ADMINISTRATIVE LINE	165+600 DONIE JARINIE	168+924 JERINA	172+300 LEŠAK	177+900 DREN	182+600 PRIDVORICA	188+500 SOČANICA	192+300 IBARSKA SLATINA	195+700 PLANDISTE	202+000 BAINJSKA 208+200 VALAČ	210+900 ZVEČAN	213+267 JUNCTION POINT	0+120 KOSOVSKA MITROVICA SEVER	41.026 STATE DAPPED	43+815 BOGOJEVO	50+067 SONTA	50+608 OPEN LINE JUNCTION SONTA	58+636 PRIGREVICA	00+080 BUKUVACKI SALASI 73+450 SOMBOR	83+360 SVFTOZAR MII FTIČ	97+501 ALEKSA ŚANTIĆ	105+172 BAJMOK	111+845 SKENDEREVO	115+374 TAVANKUT	118+55/ LjU10VO 123+761 ŠEBEŠIĆ	128+221 SUBOTICA PREDGRAĐE 131+872 SUBOTICA
	Distance in km	3	0,970	3.487	3,499	7,962	9,252	3,693	5,507	2,190	5,140	4,147	4,710	5,390	2,412	1,200	3,324	3,376	5,600	5 200	0,500	3,800	3,400	6,200	2,700	2,367	*0,120		2.739	6,252	0,541	8,028	7 370	0.010	14,132	7,671	6,673	3,529	5,204	4,460
transport	Left track	2				~	نے ا	l '		o.i				~	ر		•			•	ci			•						٠.	<u> </u>						_	-		
handover to public	Right track		30 10	1931.		07 08	1931			07.08	1931			12.02	1931.						12.02.	1931.								5	1870						11	1869		
To ste Of	Joant tdo! A																																							



	Altitude	30	\top	T	T	П	T		П	\top	\top		П		1	T			П	1		7		П	\Box	\top	П		1		П	T	Ξ		101,6		82,6	84.5		
		Н	-			I	-			-					Ц.			I	ľ	-						-		-			Ц		-	L	Н	- [1		-	
[we min our our	Saugg gange	Н	-		I-SZ	Н	_	ŽS-I		-	ŽS-1	+	Н			-C2-		ŽS-I	ŻS-		ŽS-I		-	ŽS-I		L	ŽS-I	-	ŽŠ	-	,	ZS-I		1 ŽS-I	ŽS-I	.	ŽC 1	+		ŽS-I
To some seisence of [Mab] and the	$\xrightarrow{\leftarrow}$	27 28	-		5 5	Н	-	9 2		-	17	10 8	1 11			5		6 1	-	-	7 5	.	4	+		F	6 1	-	- 0	4		-		2/4 9/11		-		3 6	+	- 2
Ruling	adole	-	\mid		+	Н	+	1 9		\mid	-	+	6		,	+		1	1 -	-	5	.	9	+		H	1 (\mid	,	1		2		7/8	-	.		2	+ 1	2
Ruling gradient	ncline	+	ŀ	7	2	2	+	7		ŀ	15	+-	-	•		7		9	2	F	7			3		f	5	ŀ	0	\dashv		2		0/2	\rightarrow			n m	,	0
[%] u	Oradient of the statio	24		00	0,0	0,0			•									7,0	5,6										0 0	2,0			55		0,0	,	0,0	4.5	,	
sn	Міпітит сигуе гаді	23		009	8	300		300			350	200	350		9	000		400			300		200	300					009	8		180		200	3000		9	700		1000
	Open for the acceptal dispatching of passen gresations	22	μ	4 H	. L.,	P/F	F	T.		t	ц,		P/F		щ		Ľ				Ь		ш	Ъ		Ĺ	,				Ь		ď		P/F		p	4		
mioq e	Occupancy of service	21	۵	цд	ч Д	Ъ	r	Ъ		6	٦.	Þ	Ъ		д:	0	ď				д		д	Ъ		٥	,		> =)			Д		Ъ		٩	ч с	.]	
mrotta	siq gnibsol-bnə/-əbi8	20		V	o so	S		S					S		S																						\perp	Ι		
	Preight car scales	19						ıcs									Yes			I						Vec	153	nci)		on G	П					. [V	Yes]	
OIIC	Service point code - ¹	18	16001	16201	16203	16204	16001	16202		.000.	10701		15501		16202		16201				16103		16021	16103		16201	10201	:1" - (Jaji		ine juncti	16053		16801		16505		14071	23301		
he service point	Manner of securing t	17	-	-		1		1				-	1			٠,	-	1	-					1		-	1	out "K		pen li		-	11		-	. [-	1	aonica	
noitelu	தன offfert to ranneM	1 1.	- Batajnica	station distance	station distance	station distance	ca	station distance		"B" - Open line junction "K/K1" - Resnil	station distance	station distance	station distance	n "K/K1")		station distance	mean) - v nonam	station distance	station distance	- Rakovica	station distance	Rakovica	station distance	station distance		(Какочса)	station distance) - turnout "K" - turnout "K1" - (Jajinci	station distance			AB with TWT		AB	AB	marshalling yard - Open line junction Sajlovo	and distance	block post distance	- junction point 28 - (Osipaonica)	RC with AB
	scceptance of the ongest trains			nd 3	3	4	- Ostružnica	2		ine jun	nd /		3	line junction	and 4	Onen Tine is			H	4	2	٠ ا	8 and 9	5			T	n "B")	T	line		1	nd 4		g pu	unction	C F	and 2		
Direction B→A	Ltacks for	L .	- Ostružnica	2 and	7	Ĺ		\perp		Den 1	o and		Ц	line j	2,3	_ [_			nction		nction				Junction		junction	_	-Ope	Ш	4	3 and	+	4 and	line		7	oint 1	Щ
D, eve, c	Maximum permitted rain length			750	733	862	CD "B	750		B" - C	/8/		730	Open	842	a.	4			ine ju	702	line junction "T"	789	702		ne jun		ii.		park			nc1 566		749	Open	200	86/	tion p	
B←A	receptance of the ongest trains	13	YARD "A"		3	3	Beograd MARSHALLING YARD "B"	2		junction "				ĭ	3 and 4	line imortion				- Open line junctionN	4	- Open		4		Open line		junction "K/K1": (Open		Karadordev park - Open			21 Indiya - Golubinci 644 1 and 2 5		2 and 3	ng yard -	C Pur	1 and 2	Krsna: (Kolari) - junction point 1	
Direction	Maximum permitted rain length Tracks for	12	LING	t	733	853	SHALLI	750	track loco Makiš 2 is 2914m	Open line ji		t	730	Ě	845 3	Onen Iine				yard "B")	702	yard "A"		702		yard "B" -		n "K/K1	+			-	21 Indiya - 644 1		655 2	narshalli	+	86/	ia: (Kola	
pəəds	eft track	1=	grad MARSHALLING				MAR		loco M	1			Н	Open line					Н	lling y		alling y		Н	.	llung y:	_	junctio		Open line junction	50	⊣'		8 8	П	Sad			la Krsn	
Maximum permitted	Zight track	12	d MA		30		eograd	20	track	ard "A"	9		20	1	20	Ell Pact) and	30		Beograd marshalling	30	marshalling	30	20	,	marshalling	30		9	pen li	20			08	8	Sad - Novi	5	3	n Mala	100
	Railway line categor	10	Beogra	7	4 2	D4	112 B	D4	300 and	halling yard	7	74	7	Ostružnica			Small B	<u>D</u> 4	7	ograd 1	74	ad	7 7	7	.	eograd 1	D4	the Open line	7	⊣ <u>՝</u>	\vdash	7		D3	D3	lovi Sad	2	n n	the station	D4
	Class of railway line	 			M	\vdash	╁					M	Н	114 Ost		M	- Iai		M		M		+	M	- 11	-	M	44 F	>		⊢	M			₩	122 No		ZZ		
IIIC	Single/double-track I	\mathbb{H}	F		S	Н	ŀ	S	ints 3	rad m	v	1	Н	=		S S	-		S	116 (S	1	S S	\vdash	.	8	S	e area	v	čevač		D	-		\vdash	=		2 0	track	S
	Type of service point	Н	-			H	ŀ	_	od u	113 Beograd man	و ـ	-	Н		_	15 Beograd mar	-		9	-	9 -	.	-1 9	\vdash		-	\perp	at th	0 0	Pan		9 1	-	14	ш	+	12	+	tion	12 21
,	trion equivae to equT	-	F	+	+	1	ŀ	+	ınctio	=			H	-		Ĭ	₽			ŀ		.		\Box		F	0	track		nction		_	-	-	1		+	- 4	123 Deviation track of	
	ino			AKU A			9 00	d UNI	lling Yard A via ju		AKD A						ARD B						ARD A		604 m	B U B		119 Connecting track at the area o		120 (Open line junction Pančevački							79	JKU		
	Name of service point	5	DMADCHALLING	3+300 DEOGRAD MARSHALLING LARD	MCA	CA	NAABCHAITAIL W.C. V.	5+902 OSTRUŽNICA	Distance between Belgrade Marshalling Yard B and Belgrade Marshalling Yard A via junction points 302.	The Country of the Co	0+000 BEOGRAD MARSHALLING YARD 2+776 OPEN LINE HINCTION B	VE JUNCTION K			0+000 OSTRUZNICA	NE JUNCTION B	D MARSHALLING Y.	4+895 OPEN LINE JUNCTION R	NE JUNCTION A		NE JUNCTION R		5+250 BEOGRAD MARSHALLING YARD 0+000 OPEN LINE HINCTION T	CA.	Distance between the open line junction T and Ostružnica station is 5604 m	D MARCHALLING VA	2+483 OPEN LINE JUNCTION T		8+8/2 OPEN LINE JUNCTION K 0+335 OPEN LINE ITINCTION K1					T	VCI		0+000 JUNCTION POINT 6 NOVI SAD	1+850 NOVI SAD MAKSHALLING YAKD 3+677 SAILOVO		0+000 JUNCTION POINT 1 MALA KRSNA 2+314 JUNCTION POINT 28 MALA KRSNA
	Chainage) 4	O-000 BEOCE AT		-		A TOOLE OF	5+902 OSTRUŽN	rade Marshalling Yard	and the second				-			1+772 BEOGRA				5+798 RAKOVICA			5+612 RAKOVIC	pen line junction T and	1+774 BEOGRA					0+000 KARAĐORĐEV PARK		0+806 INPITA		4+708					
	Distance in km	3		3 300	11,200	11,158		5,902	en Belg		2776	6,081	1,562			7,171		3,123	1,414		0,903		5.250	*3,129	een the o		0,709		0 463	0,0		1,491		*1.949	*3,527		1 050	1,850		2,314
public transport	дей таск	5 I		90	1967.		90	1970.	ace betwe	1	02.08.	28.05.	1967.		28.05.	1907.	8	1070		;	20.10. 1988.		02.03.	970.	nce betwe	00	1970.		28.05.					10.12.	1885.		09.12.	1992.	†	
Date of handover to	Sight track	- I		šč	ŭ #		5	7	Dista		5 -	32	ï		ನ ಕ	1	1	5 F	•		2 1		0	Ĩ	Dista	5	7 6		7 -	1				<u> </u>	-		ŏ	1		



	1.01		Inde: : :		141 1 1-1		1-1-1-1	1				
ShutufA S	102,6		183,8		84.5	82,6	84,5	84.5	84.2	110.5	79.2	1132
almid Suipeor 2	33	333	3 3	3	1.42	3	3	7	- - :	333	3	<u> </u>
	20 20	202	2 2	-23	\vdash	**	25-1	\$2	281	 	*	++++++++++++++++++++++++++++++++++++
To constitue of	C4 92	9 8	0 0	9	10 11	4 1	40	3 7	e) 1	•	-	8
Silope gradient	00	* 0.0	r *	100	8 0	m o	90	-	*	 	C4	vo.
Smilns anibut \$3	- m	n 0 n	0 4	*	9 40	- 50	**	**		7	-	
[e/K] notate at the station [%]	3,0		04		0.0	4,5	9,5	ш	00	10	100	000
Minimum curve radius	500	300	609	238	298	238	298	233	ЦЦ	↓Ш	200	300
Ed dispatching of passengers/freight snoisersqo	0. 0. 0.	£ £ a	£ £ £		ο.	ο.			a. a.	ο.		8
Occupancy of service point Open for the acceptance and	0. 0. 0.	a. a. a.	a. a. a.	HH	α. α.	ο. ο.		a 5	a i- a i		20	a D
mottelq guibeol-bray-obi8 S	90	90	o 55	HH	00	60			m - m		55	8
2 Eucl8tr caracates	8	8	8 00	HH	Π	H	HH	HH	ĦĦ]	HI	9
DIU - aboo minog soivnas≧ ≅	13405 13407 13450	12516 12601 12301	1280	Ш	16808	16808	23301	23301	3300	23409	16805	23.706
Iniog coiving the sorvine point	- 4 -			9	1 1 1	= =	= =	= =	1- 1-	- 11	==	
	900			(Čeleku	2018	8	tage.	200	3	8 8 8	danse	8 8 8
Manner of traffic regulation	- 6 6	AB AB	AB AB		detre	fotion distance	with station determine	eine ei	detempo	Sprion defence Sprion defence	9	tation distance tation distance tation distance
	station d			ion point 4-	90	1000	-	- 1	station	MON HOUSE		terion de terion de
	7		9				Š	é	22	8	8 8	
A B noces for B A B noces for the strength of the str	836 9 and 10	40 -	3	r 2 - juno	4 and 5	4 and 5	l and 2	1 and 2	3 and 4	k 1 Subs	1 and 2	2 and 3
noncentra	83 53	88 8	28 E E	8	493	e 8	, <u>19</u>	HH	28 23 23 23			7 - 1 -
	8 %	100	3 3 4	inaction	HH	Ŭ 	-		-H2H		NES 3	<u> </u>
	S di	n = - 5	0 8 0 0 0 0	(C) (C)	4 and 5	4 and 5	3 and 4	V day		yo prode	Vinogradi	
	6 3	30 8		in and in a	2	6 - 	·		11 Nova - 2			594 2 238 1
Maximum permitted	849	733	733	5	492	Nova 20	69	Vibra N	943 Vrbus N 531	Aleksnar 907	M M	22 39
bottimaq sen flad =	8	30	30 30 30 30	30 N	80 8	98	800	90 90	9 9			50 100
	-	Ъ	2	g a	Щ	\square	Щ	Щ	\dashv \vdash	1	8	
For Beathway line category	1	222	2 22	ok of		Ш	Ш		\dashv \vdash		ž z	8 2 2
	ž zz	XXX	2 2	2	×	×	×	×	× ;	Z Z	×	06 06 06
anil zbert-oldrobletgni8 5	00	00 00 00	vo v	S	ve	60	00	W)	60	0 00 00	60	vo vo vo
Type of service point	r			2 12 12 0 12 12 0 13 13 0	- 6 9 4		4 0 -	40-			9 =	- 5 50 5
ia ia	RD			21						Ве	VINOGRADI	V.
Name of service points	LAPOVO VAROŠ LAPOVOM ARSHALLING YARD LAPOVO	TRUPALE NIS MARSHALLING YARD OPEN LINE JUNCTION MOST MEDUROVO	0+0.99 (R.VENI KR.ST 3+23) NIŠ M.ABSHALLING YARD 244-62 (MIŠ 244-62) (MIŠ	NT3 NIS						VIGIAS NALIMOVIĆEVO ALEKSANDROVO PREDGRAĐE BLOK I SJBOTICA	0-00 RASEUTNICA KARLOVAČKI VINOGRADI 0-633 KARLOVAČKI VINOGRADI	SIBOTICA BLOK I SIBOTICA IM 1-813 SC SIBOTICA JAVNA SKLADIŠTA IM 3-848 SC
	OVO VARO	MARSHALL N LINE JUN JUROVO	OR VENI KRST NIŠ MARSHALL NIŠ OPEN I NE II N	0-00) ANCTION POINTS NIS 0-572 ANCTION POINT 4 NIS	NOVI SAD NOVI SAD TPS NM 002+201 SC SALLOVO	NOVI SAD NOVI SAD TPS SALLOVO	SATLOVO IM 000+285 SC RUMENKA	SALLOVO NM 000+331 SC RUMENKA	0+000 VRBAS NOVA 1+846 VRBAS 0+000 VRBAS NOVA	1-8-49 NAUMOVIČEVO 171-9-02 ALEKSANDROV 175-3-05 BLOK 1 SUBOTIK	EOVAČKI K	S.BOTICA BLOK 1 S.BOTICA NM 1-813 SC S.BOTICA JAVNA NM 3-848 SC
	IAP IAP	NIS) OPE	8 H	SS	NO NO	S S	S W	NIN NIN	VRB VRB	NAL	KAR	SUB SUB SUB SUB
A Claimage	0+000 2+100 3+788	235+243 238+177 239+280 241+268	3+233	0+000	0+000 NOVI SAD 1+996 NOVI SAD 2+201 NM 002+X 3+336 SAJLOVO	0+000 1+995 3+336	0+000 0+285 3+323	0+000 SAJLOVO 0+331 ISA 000+3 3+323 RUMENK	0-000	171+962 171+962 175+305	0+000	0+000 1+082 1+813 2+500 3+848
w Distance in lem	2,100	1,988	3,134	ш	0,370	1,306	93,062	9,016	2,248	5,443	0,683	0,731 0,687 1,348
	2 -	2 = =	en (n	°	\$1 0 F	£, ≛,	0 \$	0 0	\$4 E		0	. 00-
public public track transport		1942	1942.	0.06							2025	=
Pight track Date of Tandover to	167,1961,	61	81	0106							2025	1611



A→B Direction	400 0.0 1 3 2 4 500 0.0 1 3 5 4 4 6 6 4 6 6 4 6 6 7 6 6 7 6 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6	400 0,0 1 3 2 4 0,0 0,0 4 3 6 4	0,0 4 3 6 4 0,0 2 0 2 - 2,5 6 5 6 5	10 10 10 13	10 10 10 13 7 0 7 - 2 2 2 2
10 12 12 12 13 14 14 15 15 15 15 15 15	T P/F 0.0 1 3 2 4 U P 400 0.0 1 3 2 4 T P/F 500 0.0 4 3 6 4 U P 500 0.0 2 0 2 -	400 0,0 1 3 2 4 0,0 0,0 4 3 6 4	0,0 4 3 6 4 0,0 2 0 2 - 2,5 6 5 6 5	10 10 10 13 1 1 1 1 1	10 10 10 13 7 0 7 - 2 2 2 2
10 1 1 1 1 1 1 1 1 1	T P/F 0.0 1 3 U P 400 0.0 1 3 T P/F 500 0.0 4 3 U P 500 0.0 4 3	400 0,0 1 3 0,0 0,0 500 500 500 6 4 3	0,0 4 3 0,0 2 0 2,5 6 5	10 10 10 10 1 1 1	10 10 7 0 2 2 2
Maintain Principle Maintai	T P/F 0.0 1	400 0,0 0,0 500 0,0 4	0,0 4 0,0 2 2,5 6	10	10 7 2
March Marc	T P/F 0.0 U P 400 0.0 T P/F 500 0.0 U P 500 0.0	400 0,0 0,0 500 0,0	0,0		
Maximum Maxi	T P/F 400 U P 400 T P/F 500 U P 500	400			3,0
Maximum premitted Maximum premitted Maximum premitted Maximum premitted Direction Directio	T P/F U P T P/F U P				
Maintaine Main	T D D	된 교 보	500 500 800	300	300 400 1000 1000
Particular Par	$\overline{}$		P/F P/F		
Maximum Maxi	01 01 01		+++	S P	
Maximum Maxi		7 01 01	01 01 01	1 02	
Particular Par	00 00 00 00 00 00 00 00 00 00 00 00 00	0 0 0 0 0	00 03	01	003
	22509 22601 22602 22603 22604	226	22603 22604 22605	23801	23802 23803 23804 23805
	7 10 9 9	10	9 9		1 4
	station distance station distance station distance station distance	station distance station distance station distance	station distance station distance station distance	station distance station distance station distance	station distance station distance station distance station distance station distance
	143	d 3	44	d3	and 3
	2 and 3 2 and 3 2 and 3 2	2 an 2 an 2 an 2 an	2 and 2 3 and	2 and 3	2 an
	740 568 523 570	523	523 570 619	523	009
	and 3 and 3 and 3	d d 3	d 4	d 3	d3
	2 and 3 2 and 3 2 and 3 2	2 an 2 an 2 an 2 an	2 and 2 3 and	2 and 3	2 and 3
	740 568 523 570	568	523 570 619	523	009
			0	0	30)
	09	Ø	9	20	20 (30)
	ខាខាខាខ	ខខខ	ខខខ	AAA	AAAAA
O	2 2 2 2	X X X	* * *	2 2 2 2	***
	S S S S	s s	s s s	S S S	S S S S
	1 3 8	3 8 1	- 8 -	9 12 1	3 3 3
Amange A	0-356 BANATSKO MILOŠEVO 5+105 BOČAR 0-700 ESTER 8+067 PADEJ 5+230 OSTOJIĆEVO	0+508 BANALSKO MILOSEVO 5+105 BOCAR 10+700 ESTER 18+063 PADEJ		35+187 38+407 0+000	
Distance of in the control of the co	7	3 5 8	5 5 0		12 [4] [4] [4]
17.09 12.10 17.09 18.41 17.09 1.50 1.50 1.50 1.50 1.50 1.50 1.50 1.50	7	4,749 5,595 7,363	7,363	3,220 *1,082	*3,129 6,917 5,013 3,825



	Altifude	30	113,2	77	77			81,3	84,9	85,6	85,9	85,7	84,4	85	4,00				86,4	85,1		81,8	81,5	78,6	78,4	88,4	77.4	79,8	82,8	50,08	90				80,3	6'08	101 0	80,9	81,6	81,8	79,2
	Saugg gaibeo	29	I-SZ		ŽS-I	f	ŽS-I	I-S	ZS-1	ŽS-I	ŽS-I	I-S	ŽS-I	ZS-1	7c.1	ŽS-I			ŽS-I	ZS-1	ŽS-I	I-S	ZS-1	ŽS-I	ŽS-I	ZS-I	ZS-I	ŽS-I	ZS-I	1-07	7.0	Н	ŽS-I	7-63		ŽS-I		ŽS-I	ŽS-I		S-I
the line [daN]	←		2 2	-	1 3	ŀ	+	+	0 4	3 2		-	2 .	7	,	2	+		+	^		+	4 -	4		8		6	+	7 4	-	П		-		-		7 2	\vdash	2	
Ruling Tesistance of	\rightarrow	27	7 9		1			7	2	2		1	1	,	^	3			•	0		4	2 6	2		5		11	5	4 4	0		-	4		5		1	8	2	
Ruling gradient	adole		+			-	\perp	+	w 4	0		0	2	0	>	2	1		\rightarrow	^		+	4 -	4		m		10 8	+	4 v	+	Н		4	_	2 0		_	2 2	_	\mathbb{H}
	Gradient of the station	\vdash	1,0 6	145	0,5	ŀ			1,0 4	0,0	1,0	1,0	0,0	1,0	2,0	2	1		4,0				0,0		1,0	0,0	3.0			0,0		Н	,	1	0,0		0 0	0,0		0,0	2
	Minimum curve radiu		200		200			100	300	450	006		300	300	000				0.5	450		1000	1000	2005	400	450	950	400	400	400	200	Ц				300		300	200	200	400
	Open for the acceptar dispatching of passen operations		P/F	2/0	P/F			P/F	P/F P	P/F	Ъ	P/F	Ь	٦ ټو	I/I	P/F			Ė	P/F		P/F	D/F	P	Ь	P/F	ч д	Ь	Ь	c	1	F	щ				P/F	P	Ъ	P/F P	•
tnioq :	Occupancy of service	21	Ъ	-	J D	٢	4	<u>L</u>	J.	T		Ъ	д ;) e	4	Д			Ч	Ч		n :	D E	Þ		Н		U	ם) F	4		c	1	U	I	٩	ņ	,	Ь	
mioh	Side-/end-loading pla	+	S/E	ū	Ω	ļ	\perp	S	N N	S		S	•	S C	a	S				N.		S	v	2		S		S	S	2		80		4	S	Ц	S	S	S C	N V	2
	Preight car scales	Η,	. 0		_		_	e .	4 2	1	-	2	ω .		7 6	0 0	1			_			0 0	h	7	9 4	0 4	3	2 :	_ 0	0	1 Yes		-	-	H	0		2 0	ω 4	+
OIIC	Service point code - J	18	23450	2100	21001	0000	73301	24003	24004	24001	25001	25002	25003	25401	20402	25470			23301	23001		22311	22310	0677	22307	22306	22304	22303	22302	22301	7777	16871	13301	7330	22301		16550	1660	16602	16603	-
ne service point	Manner of securing th	17	4		Щ		-	φ,	4 01	7		4	7	0 -	-	-	1		(- 6		∞ ;	9 0	0		4	-	5	5 5	2 5	10	4		-	10	10	-	3	10	2	-
noüslu	து அரசரி பிர்கரி	16	station distance	1 1	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		Orlovat stajalište	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	junction		station distance	block post distance		station distance	(Zvornik Novi)	station distance	station distance	station distance	station distance
	acceptance of the ongest trains	15	and 3	(Jabuka)	and 5	r		and 3	2 and 3 1 and 2	2 and 3		and 3	and 3	1 and 2	and 5	and 4		1	:	and 3		and 3	2 and 3			and 3		and 3	2 and 3	2 and 5	Open line	П		(oraș	and 3	Π,	border -	and 3	:	and 3	П
Direction B→A	Tracks for		2	2a -		jevo		2 0	_		Н	7		+	1		4	šančevi	(7		\vdash	\top	1	Н	7	+	2	\pm	7 -				(Lukićevo)		H	state b	2	9	7	\mathbb{H}
	Maximum permitted	-	594	junction	200	- Bogo		544	710	387		-	+	+	660	732	4	Rimski		800		593	533	Ť,	Н	573		Н	+	252	_×			- 1a -		Ц.	orina - s	\perp	\vdash	628	
g-V	acceptance of the ongest trains		2 and 3	line	and 5	džaci		2 and 3	2 and 3 1 and 2	2 and 3		2 and 3	and 3	1 and 2	c pile	and 4		1		2 and 3		and 3	2 and 3	alle		2 and 3		2 and 3	2 and 3	2 and 3	YARD.			line innetion	and 3		and 6	and 3		2 and 3	
Direction A←A	rain length Tracks for		594 2	š - Open	9	Sad - C	+	+	710 1	387 2	Н	-	+	+	000	730 3	+	on Sajlovo	+	2 8 2	Н	+	533 2	+	Н	573 2		Н	+	200	NG Y	Н		en line	555 2	H'	junction Donja Borina - state border	+	\vdash	628 2	+
pəəds	Left track Maximum permitted	\vdash	5	206 Pančevo Varoš - Open	Ô	207 Novi Sad - Odžaci - Bogojevo		30	7	3		7	4 (7	5	7	1	e junction		^		5				2		Ш	7	0 0	Sad MARSHALLING	Ш		nat - Onen 1		4	one junc	9	Ш		Ц
Maximum permitted	Right track	Н		ančevo	20	20	50				9			9		100		-Open line	40				(80)					(08) 09		30	d MAR	10	90	10	30	۱	Open line		70 (80)	,	
	Railway line category	\vdash	t A	2061	D2	ŀ	C3	S 3	2 2	$D3^{2)}$	$D3^{2)}$	D3	D3 ²⁾	D3.7	D32	3 2		Sad) -C	{	3 8	3	A ·	Y V	V V	Ą	V V	t A	A	V ·	4 ×	Novi Sa		უ ც	210	<u> </u>		Sabac -	D3	2 2	2 2	25
	Class of railway line	∞ 0	4 24		R	r	4 4	\vdash	_		R	\dashv	-	-	+	4 24	+	(Novi	r	× ×		2	24 04	4 24	R	2	4 24	2	24 1	4 0	209	-	24 0	+		$\overline{}$	-		24 1	+	+
əu	Single/double-track li	7	o s		S	c	o s	S	s s	S	S	S	S	S C	0 0	2 02		208 (C	ν v	2	S	S O	o so	S	S o	2 02	S	S C	20	0		S o	2		S	211 Ruma	S	S	N N	S
	Type of service point	9 8	1		9	,	3 4	٠,	10	1	3	1	- 5	2 -	3	, -			4	1 9	,	- :	10	10	3	- 6	3 0	-		٦ ,	7	-	-	+	-	9	1 1	-	∞ •	3 1	9
	se point	•																			(UKINUTO)											YARD				OVAT 1a					
	Name of service point		76+685 SUBOTICA	ANIČENIO MADOŠ	1+539 OPEN LINE JUNCTION 2a	0110	9+100 VETERNIK	UTOG	25+111 PETROVAC-GLOZAN 29+542 BAČKI MAGLIĆ	GAIDOBRA	44+224 PARAGE	RATKOVO	59+003 ODŽACI	61+240 ODZACI KALVARIJA	22+448 KAKAVOKOVO	4.214 76+685 BOGOJEVO	gravukovo line category A		0+000 SAILOVO	10+148 KIMSKI SANCEVI 14+608 OPEN LINE ITINCTION 1	15+751 OPEN LINE JUNCTION 2 (U	KAĆ	25+218 BUDISAVA 32+224 ŠATKAŠ	VILOVO/GARDINOVCI	TOK	49+432 TITEL	53+845 KNIĆANIN	PERLEZ	65+522 FARKAŽDIN	75+381 UKLUVA1	MLOVAL SLOP	NOVI SAD MARSHALLING	1+595 NOVI SAD LOKOTERETNA	AJLOVO	75+915 ORLOVAT	76+545 OPEN LINE JUNCTION ORLOVAT	TIMA	11+344 BUDANOVCI	VIKINCI	LATICEVO	31+373 OPEN LINE JUNCTION 1
		2005	685 S	g 320.0	539 0	000	1000	-554 F	542 B	36+092 G	-224 P	50+447 R	-003 C	440 C	471	685 B	ci and Ka		S 000	-148 K	15+751	20+569 K	218 B	38+394 V	43+845 L	49+432 TITEL	845 K	58+175 P	522 F	281	7 007	-141 N	-595 N	2 (81	915 C	-545 C	517 R	344 B	675 N	344 F	373 0
	Chainage															4 76+	Sajdobra, Odža																				to				
	Distance in km	3	12,093		1,264		*6,029	3,45	12,557	6,550	8,132	6,223	8,556	2,237	7.03	4.21	vice points (,	*0,4/9	1,143	4,81	4,649	6,170	5,451	5,587	2.713	4,330	7,347	9,839	0,0		0,454	2,0,		0,630		10,827	5,331	7.55	2,47
public transport	Left track	2		5	09.04. 1894.									12	1908.		area of ser		31.05.	1904.	0.7	1889.		5	1889	15.07	1927.		15.09.	Ġ						11.09. 1935.		:	1901.		
Date of handover to	Right track	1		9	18									24	19		1) At the		31.	51	8	18		8	18	15	1 61		15	51						11.09		2	3 6		



	əbutirlA	30	79,1	0,07	79,1		63.4	85.5	91,2	90,8	101,9	105,2	109,4	177 3	121,6	119,8	135,6	134,0	130,9			79,3			Ī		144	144	147,4		153,4		167,5	160 5	174.8			186,8		195.2		202,4	198
	Saugg gaibeo	59	ZS-1	I-SZ	I-SZ	Į-SŽ	ZS-1	1-S2-1	I-SZ	ŽS-I ŽS-I	ŽS-I	ŢS-I	I-S2	ZS-1	ŽS-I	I-SZ	ŽS-I	1-07	ZS-1	ŽS-I		ŽS-I		ŽČI	I-SZ	ŻS-I	ŽS-I	75.1	ŽS-I	ŻS-I	ŻS-I	ZS-I	ZS-I	75.1	ŽS-I	ŽS-I	ŢS-I	ZS-I	ZS-1	ZS-I	ŽS-I	I-SZ	ZS-I ŽS-I
[Mab] anil adt	←	28						,	2	,		-		4	+	3		0	,	9		- 1	ŀ	1			_	7	7		5		7	v	+			9		4	Н	7	6
Ruling resistance of	\rightarrow	27	7				V	0	2	2		3	T	4	-	3		^	2								10	7	7		5		7	v	2			9		4		7	3
gradient	edols	-	7				c	>	-	0		0		0	1	2		7	0	4		0					5	-	4		1		2		, w			5		4		4	7
Ruling	lncline	25	7		Н			2	2	10 2	0,0	0 3	0 0	0,0	0 0	0,0	0,0	0,0	4	0		0	-	+				7 0	4 6		3 5	-	8	5	5.3 4			9 9	+	5 4	Ц	9	0 3
[%] u	Oradient of the statio	24	0				•	0,0												L		Щ							4,4		5,3		0,8					4,55		0.75	\perp		
sn	operations Minimum curve radi		300	5		300		700	009	200	700		700	7007	5500	700	500	707	700	300		300	-	_			200	757	250		700		200	205	500			200		200		300	300
	Open for the accepta dispatching of passer	22	D/F	1/1		•	P P	P/F	P/F	P/F	Ъ	P/F	<u>а</u>	Р Т/Д	Ь	Ъ	P/F	P/F	<u>ц</u>				,	P/F p	ц Д	Ъ	P/F	P/F	Ъ	Ъ	Ъ	Д	<u>д</u>	д П/д	Д	Ъ	ď	<u>с</u>	- P	ц Д	д	P/F	P/F
anioq a	Occupancy of service	21	Д				٥	4	n	Π		Ь		Д	•	Þ	r	4	Д				,	Д			U	ч	n		U		Þ	Д	ņ			Þ		n	\perp	Ъ	H
mion	side =/end-loading pla	\vdash	A/₹	1					Ш	4			1	v	2			Ω						S			S	Ω	S		S		S	v	S			S		S	Ш	S/E	S
	Freight car scales	119	H_	+	Н		_		-					_	_					Ļ				- 1 -	_							_		+	\perp				+	-	H	\vdash	+
nıc	Service point code -	18	16350	2001			16301	16302	16303	16304	16306	16307	16308	16310	16311	16312	16313	16314	C1601	16319				13352	12201	12202	12203	12204	12205	12206	12207	12220	12208	12209	12211	12212	12216	12213	1221/	12215	13220	13251	13001
he service point	Manner of securing t	17	1 0	1	1	-	٥	0	4	00		4	4	4	-	4	<u></u>	4	3	1			ŀ	-			φ,	4	2		2		2	0	2			2	1	2	Ш	4	3
noitelu	gen officitio renneM	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	- (Štitar)	station distance		etation distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		station distance	station distance	station distance	station distance
V. G	acceptance of the ongest trains						C Puc	and z	2 and 3	2 and 3		2 and 3		2 and 3	arra d	2 and 3		and 4			junction 3		f				2	4	2		3		3	~	<u>س</u>			3		3	П	4	3
Direction B→A	rain length Tracks for						1 1/1	1	497 2	542 2	1	614 2	+	853 7	+	574 2	,	018 3			line ju		Požega	+			412	/14	586		625		602	03	089			647		657	H	738	605
	ongest trains Maximum permitted						+	_	Н	~		\dashv	+	~			١,	4			- Open line	\neg					4 (+	5		9		9	-	100			9		-	H	\vdash	9
Direction A→B	racks for fracks for	13	bas c	7 ama			1 and	1 and 2	2 and 3	2 and		2 and 3) and	7	2 and	,	s and					Stalać - Kraljevo	4			2	4	2		3		3					3		3		4	3
	Maximum permitted train length		467	è			614	+T0	497	542	!	614		853	3	574		018			line jun			582			412	/14	586		625		602	603	089			647		657		738	909
permitted beeds	гей таск	Н		20			(08) 02						6	(08) 00						20	(Platičevo) - Open line junction 1	50	213			30 (50)									25 (40)	,							
mumixeM	Right track	\vdash		_	11		_	_		_			_	<u> </u>	_	_	Н.	_	_	L	tičevo		-		_				.		1				_			.			T'	_	
,	Railway line categor	6	20 2	Z A	D	D3	3 2	3 4	A	A A	A	Α	ä	۲ ک	Y	A	A S	3 2	S A	ε	(Pla	D3	-	3	3 8	C	ဗ	3 8	B	B	B2	B2	B B	2 E	B	B 2	B 2	B2	2 E	B2	B2	B	D4 D4
	Class of railway line		24 24	4 84	×	× 1	χ p	4 24	×	24 24	R	R	2	서 6	* ×	×	24 1	4 6	4 4	2	212	R	-	ρ	4 24	R	2	서 12	* ×	×	R	8	24	Z 2	4	R	R	2	۲ p	4 24	~	2	저 없
	Single/double-track l		\vdash	2 S	Н	+	+	o so	Н	S S		\dashv	S	N V	+	⊢	S	2 0	v s	H		S	-	<i>V</i>	2 S	S	S	N V	S	H	Н	S	S	2 0	S	S	S	S	ט מ	v s	S	Н	S S
1	Type of service point	9	9 -	1	9	9	ν c	3 6	-		3	1	m (η -	3	-	٠ س	7 6	n 0	13		9		3 -	n	3		3 1	1	3	1	3	(2 -	-	3	3	(v "	1	3	-	12
	Chainage Name of service point		31+952 OPEN LINE JUNCTION 2	33+695			4+000 MAJUK		22+031 PETLOVAČA				38+900	45+400 LIPNICA 51+3061 OZNICA	53+400	56+183	61+700		0/+800			0+000 OPEN LINE JUNCTION 1 0+675 OPEN LINE JUNCTION 3		0+374 STALAC 1+400 GR 4D STAT A Č				14+559 KKUSEVAC 10+400 ČTT1 1TZ						38+949 IRSTENICKI ODZACI 42+455 TRSTENIK	49+200		55+638		50+938	65+881			72+558 JUNCTION POINT /3 KRALJEVO 78+637 ADRANI
	Distance in km	3	0,579	0.980		0,682	2,000	6.575	7,731	3,769	4,587	1,700	3,900	6,500	2,004	2,783	5,517	3,034	0.885	*0,800		0,675		1 026	2.487	5,083	2,953	2,050	1,984	3,924	3,709	4,683	1,847	3,402	6.745	4,038	2,400	2,013	7 2,287	3.656	3,027	2,713	6,099
transport	Left track	2	<u>.</u>								<u>.</u>							1.	<u> </u>	378.			t		اسا	_		\dagger		-					i						ш	\top	
Date of handover to bilduq	Right track	1	03.06								15.05.	1561						15.05	1950.	09.03.1978.					15.05.	1909									01.12.	1958							



	əbutirlA	30	2124	í	228,7	228.4		237,3	2000	250,3	2	298,2								T			70,9		85,1		8	83,0				83,0				76.2	7.07	123,1	175 3	129.2		105,3	T
	Loading gauge	29	I-SZ	ŽS-I	Į-SŽ	ZS-I	ŽS-I	ŽS-I	I-SZ	75-1	ŽS-I	ŻS-I	ŽS-I	ZS-I	1-87	1-07		ŽS-I	i	ŽS-I		,	ZS-I	ZS-I	ZS-I	ŽS-I	ZS-I	1-57					ZS-I	ZS-1	1-07 ŽC.1	ŽS-1	ŽS-I	ŻS-I	I-SZ	1-SZ	ZS-I	Į-SŽ	ZS-I ŽS-I
the line [daV]	←	28	v	+	00	4	\vdash	5	r	- 0	+	5			+	7			-	Ť		П			8		+	4		\dagger	1			_	1	2		2	+	0	+	10	
Ruling Tesistance of	\rightarrow	27	v	,	8	4		5	r	0	١.	5			v	1]				14			,						-	o	0 1		10	=	2		2	
gradient	Slope	\vdash	c	1	3	4		4	١.	1 0	-	-		4	•	_				_				_	7		+	4			-	Ш	_	٥	0	+	+	2	0		4	10	
Ruling	Incline	25	7		4,6 7	66		7 5		30 8		3,3 4	\dashv	+	4					+		H	0,0	+	12		_	0,7		+	$\frac{1}{2}$	0,7	-	2,6	7	0 0		0,0 10	10		0	8,5 2	+
[%] u	Gradient of the statio	24		Ш				6,17	ľ	o e	ĭ	3																				0			1				_	- 0	0	Ш	
sn	operations Minimum curve radi	Ш	009		009	000		200												_			185		250		-	450						350	-	300	1	800			L	400	
nce and	Open for the accepta dispatching of passet	22	<u>а</u>	ь д	4	<u> </u>		_	+	P/F	L	_	Ь	Ь	D/G	<u>.</u> ,,	L					Ш	P/F	Д	_		Ч					P/F	_	4	14 P				4	4 0	_		<u>а</u>
	Occupancy of servic	Н	=	+	n	=	+	Ъ	+) <u> </u>)	Ъ		+	٥	AFFI	L		-	+	-	Н	ם ;	1	Ъ		+	J.	U		\perp	Ъ	-	4	+	11)	Þ	-	ם כ) Þ	Ъ	
mioite	Freight car scales Side-/end-loading pla	\vdash	V	1	S	V		Yes S	- 6	2	-	S		1		FOR TRAFFIC	-		i	+	+	\vdash		+			-1	2			$\frac{1}{2}$	S	4		+				+	-	\vdash		
		П	2 2	4	50	4 6	2		0 5	2 8	2 8	6(.5	=		7 C			i	+		H	0	12)3		4 :	_		+	+	19	1	0 4	9 5	2 %	2 4	5	9 2	8	6	0	1 2
OIIC	Service point code -	18	13002	13004	13005	13014	13012	13060	13010	13008	13013	13009	13015	13011	15150	OSF			(0/				13670	13602	13603		13604	15551				13551	14551	14550	14500	14503	14504	14505	14506	14508	14509	14510	14511
the service point	Manner of securing	17	~	1	3	C		3	·	2 6	1	3				1 5			gačer				3	Ī	1	1		_				-		3	v	0	•	8	7	4	10	×	
noitelu	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	No 73 - (Adrami) I INF CLOSED	station distance	station distance	- junction point No 54 - (Dragačevo)		Mala Krsna		station distance	station distance	station distance	station distance	station distance	station distance			ac)		station distance	station distance	station distance	station distance		station distance	station distance		station distance	station distance	station distance
	acceptance of the longest trains	5			3	and 3		2	,	2 6	1	3				72 - innetion point			junction	T	1		3		3		1	4 Infa	Towns of the same		- (Vražogrnac)	4	1	2	+			2	,	2 6	+	3	
Direction A←B	Tracks for				4	,			4	+				\downarrow		Inctio	L		lo 53	\perp	- Radinac		4	+	L		4	Smederevo luka		_	T :		4		\downarrow				+		\vdash		
	Maximum permitted train length		909		909	600		877	25	677		618				77 - ii			oint N		/a - R		458		743			Smed	2000		ion ,2	633		543				540	533	676	;	604	
B←A	Tracks for acceptance of the longest trains	13	3	,	3	2 and 3		2	,	2 0	ı	3				noint No			junction point No 53		tion Jezava		3		3			Fezava -	Secara		- Bor - open line junction "2	4		2				2	C	2 6		3	
Direction -	Maximum permitted train length	2	909	3	909	600	Н	877	24.5	677		618				innetion			(Uzići) - ji		line junction.	Ħ	458		711		-	17 Onen line innction Jezava			r - open	629		543				540	533	676		604	
pəəds	Гей таск	=								'		_				٦,	-				Open	Γ						- ii			la - Bo								6	5	_		
Maximum bemitted	Right track	01		80	8							100				ta Ba		'	n Pož	20	evo -		Š	2			70	7 On	5	•	a Krsı		9						(08/09	9			
	Railway line categor	Н	4 4	7	4 ;	2 2	<u>7</u>	4	4 2	<u> </u>	7	74	D4	4 5	5 2	Mataniška Bania)		C	the station Požega:	7	Smederevo - Open		古	4 4	점	င္သ	8	⊢1`	`	4 2	218 Mala Krsna		점	<u> </u>	B2 B2	2 K	D3	23	2 2	3 2	23	D3	D3
	Class of railway line	\vdash	+	+	+	+	+	-	+	_	-	H		+	+	□.				~	10		+	* *	+	Н	+	+		24 24	٦٠,	\vdash	۳ ا	+	+	+	+	Н	+	+	+	Н	2 Z
	Single/double-track	Н	+	S	+	ss ss	Н	+	+	ע מ	+	Н	\dashv	+	2 0	ralier		S	track	v	+		+	N N	+	\vdash	S S	\dashv		S S	+	_	+	+	מ מ	+	╁	S	+	+	╁	Н	s s
	Type of service poin	Н	3	3	\perp		3	\dashv	e -	1 6	3 8	1	3	_	7 -	ion K	12	12	cting	12	1	П	- ,	3 0	\vdash		3		9	9 -	4		3	+	2 6	, -	3	_	e c	7 6	+		m m
		\Box	+	$^{+}$	\exists	+			\dagger	\dagger				ť		- stat	F		215 Connecting track of		1		1		T		+	1			1	Н	+	\top	\dagger				$^{+}$		Ť		
	Chainage Name of service point	4	81+528 MRSAC 84+441 SAMAII A	88+610		94+500 KUKICI 06+303 ZABI AĆF					127+200 JELEN DO			133+700	130±054 JUNCTION POINT 34 POZEGA	_	0+444 JUNCTION POINT 72 KRALJEVO	0+000 JUNCTION POINT 73 KRALJEVO		0+000 JUNCTION POINT 54 POZEGA 0+752 ITINCTION POINT 53 POŽEGA				1+/49 OPEN LINE JUNCTION JEZAVA 3+250 GODOMIN			- [10+8/2 MALA KKSNA		2+484 OPEN LINE JUNCTION JUGOPETROL 4+011 SMEDERFVO 11TR A					89+100 JUGOVICEVO	05+630	100+800		106+350 MAJILOVAC	116+414			131+800 MUSTAPIC 133+900 MIŠLiENOVAC
	Distance in km	3	2,891	4,169	3,650	1 803	2,697	6,541	4,659	2,794	6,706	1,166	1,534	3,800	2,534	70,0		*0,444		0.752			0,813	*1,832	3,461	2,413	0,342	1,400		2,484			10,928	5,563	0.000	5 542	5,168	1,927	3,623	7 359	5,858	3,766	5,762
transport	Гей изск	2		<u>.</u>				\forall			t		لب			+				001.	1					Ш		+			1	-		\dagger				Ш			<u></u>	Ш	
Date of handover to bilduq	Right track	Н		29.09.	1955				28.11	1976.			28.11.	1976.						25.09. 2001.				10.11	1888							01 10	1920.							12.03	1939		



	əbutirlA	30	127,0	153,0	154,1		ĺ	210.0		2802		376,9		3 1/21/5	4/4		518,3			4.20,1	3646	3564	278,7	201,6	152,1				2 200	700,00		443		374,7				245.7	1	216,2			188,5		
	Saugg gaibeo	59	ZS-I	ŽS-I	ŽS-I	ŽS-I	ZS-1	I-S2	ŽS-I	ŽS-I ŽS-I	ŽS-I	ŽS-I	ZS-I	7c 1	1-67 7S-1	I-SZ	ŻS-I	I-SZ	ŽS-I	1-S2-1	ŽS-1	ŽS-1	ŽS-I	ŽS-I	I-SZ	ZS-I ŽS-I			ZS-1	1-67	ŽS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	ZS-I	ZS-I	ZS-I	I-SZ	ZS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	I-SZ
the line [daN]	←	Н	2	2	-	+	7	,		,		,			,		10		\rightarrow	2	7.	+	\perp	16	\rightarrow	0 9		T		,		-		13				13	+	6			9	+	
Ruling resistance of	\rightarrow	27	6	11	3	•	×	6		0		15		1,	2		15					3		ı	1				-2	-		13		5			Ī	-	I	•			3	Ī	I
gradient	Slope	+ 1	2	2	-	+	>	-		0		0	4	+			10		+	4	13	=	+	15	+	6 9	+		_	>		0		==			\downarrow	10	+	0	Ľ	Ц	9	4	\downarrow
[%] u	Gradient of the statio	Н	0,0	1,8 10	8,0	_	8 C,1	0.0		0 0 0		2,0 14			0,0		14			2,0 0	0 0 0			0,0		0 0				0,0		2,0 11		0,0			+	0 0.9		0,0			0,0	+	+
sn	ibsa əvruə muminiM	23	450	400	300			300		300		350		300	200				0.0	320	350	250	250	250	300				030	230		240		250			I	250	1	250			400	I	I
nce and gers/freight	Open for the accepta dispatching of passer operations	22	പ	P/F	Ъ	д г	4 0	P/F	Ь	J/d	Ъ	ď	Ь	P T	T/T D	ď	Ь	Ь	ď	4	Д	P/F	Ъ	J/d	P/F			J/d	ď	T/T D	ď	Ъ	Ь	P/F		Ч	과 6	4 64	۰ ۵	Ъ	Ъ	Ъ	∃/d	ď	4 4
tnioq e	Occupancy of service	21	Þ	I	n	_		n		۵		D	4	6	4		U		:)	i	ρ Δ	ū	U	Ь			Ь	E	-	L	U		Ъ			Þ	n)	n	L		Ъ	1	\perp
moth	Side-/end-loading pla	\vdash	-	S		_		S		V.		S	4	ŭ	2					2		S.)	S	S	-		S	Č	2		S		S			\downarrow	S	1	S	L	Ц	S	4	1
	Preight car scales	119	c) m		10		~ ~	0 0				-		_	+ ~			_	50 1	-			_	~	-	-	$\frac{1}{1}$			- 0	_		9	_	-			+	_		_	10	5		
	- eboo mioe point code -	Ш	14512		14515	\rightarrow	_	14519	14520	14521	14410	14402	14403	14411	14408	14412	14405	14409	14406	1440/	14350	+	+	14303	14302			12550	+	+	14004	\vdash		14007		+	-	14010	+	14013	14014	14015	-	14017	14019
he service point	Manner of securing t	17	4 5	7	7	,	2	1		10		1	4	-	1		1		-	+	-	4	1	1			1	-	C	0	Ł	8		8	+	•	00	9	+	-	H	H	8	+	8
noitelu	gen offtert to renneM	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance station distance		:	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
B→A	Tracks for acceptance of the ongest trains		2	2	2			3		3 and 4		2 and 3		2 200 2	c alle 2					+	2 and 3	2 and 3	2	2 and 3	2 and 3		- Prahovo Port	3	0 5 5 5 5	c allu 2		3		1 and 2			2 and 3	2	1	2 and 3			2 and 3	1	T
Direction	rain length	14	520	636	700			562		681		631	1	620	000				3	000	653	T	T	999	\neg		Praho	662	$^{+}$	171	T	470		497		1	511	583	3	617	П		059	T	T
	acceptance of the ongest trains Maximum permitted	1	2		2 7			3		3 and 4 6		2 and 3 6			alle 5				ì	_	and 3 6	3 6		2 and 3 5			- Zaječar -		,	dilu 3		3 4		and 2 4		١,	2 and 3 5	2 5		2 and 3 6			2 and 3 6	+	+
Direction A←A	rain length Tracks for	2	520	36	200			562		681 3.9	1	631 2 a		c	2000					000	65 23	2	T	560 2a	$^{+}$		- 15	989	C	121		475		497 1 a		+	511 2a	628	3	617 2 a			650 2 a	+	+
pəəds	Left track Maximum permitted	\mathbb{H}	-	9	7			5		0		9		4						_	9	9 6	4	5	5) - Crve	٩	_	_		4		4			^		+	L	Н	Ш			
Maximum bennitted	Kight track	Н					20												40								219 (Niš)	:	6			3	3				90		1	65				20 (30)	
Á	Railway line categor	6	D3	¥	A	A.	4 <	t 4	A	A A	C	ဌ	ဗ	3 8	3 8	8	C3	C3	8	3 8	3 8	3 8	C3	C3	ဗ	ප ප	+``'	-	B2	B3	B2	B2	B 2	B2	B2	B2	B2	B2	32	B2	B2	B 2	B2	B2	B2
	Class of railway line	8	~ ~	R R	×	2	4 0	4 24	R	24 24	R	æ	2	× 6	4 22	~	R	R	24 1	Z 0	4 2	4 22	R	R	2	~ ~		-	× c	4 2	2	R	R	M M	2	2	× t	× ×	# H	2	R	R	2	× t	4 22
əui	Single/double-track l	7	s s	S	S	S	מ מ	2 02	S	S S	S	S	S	S O	2 02	S	S	S	S	2 0	2 0	2 00	S	S	S	s s			S C	2 0	S	S	S	S	S	S (S O	s s	S	S	S	S	S	S O	o s
1	Type of service point	9	- ~	1	-	20	× ~	1	3	3	3	2	3	٠,	3	3	2	3	е,	7 6	٦ -	-	2	-	'	9		-	·	3 .		2	3	-	6	m (7 0	2 3	3 6	,	3	3		m "	0 00
	vice point	•																																											
	Name of service point		136+067 ZVIZD 140+650 KUČEVSKA TURIJA	44+546 KAONA	148+582 KUČEVO	153+616 NERESNICA	2 NEKESINICA		166+800 BOSILJKOVAC	170+740 BLAGOJEV KAMEN 178+852 MAJDANPEK	181+800 DEBELILUG	187+674 LESKOVO	191+800 JASIKOVO	VLAOLE SELO	200+200 GORNIANE	00 ŠUŠULAJKA	73 CEROVO	207+800 KRIVELjSKI MOST	211+800 KRIVELJSKI POTOK	215+200 MALI KKIVELJ 217+500 BPEZONIK	11 BOR	224+350 BOR TERETINA	231+092 BORSKA SLATINA	31 ZAGRAĐE	99 RGOTINA	249+032 OPEN LINE JUNCTION 3 250+045 OPEN LINE JUNCTION 2		0+957 CRVENI KRST	7+493 PANTELEJ	SZ MATEJEVAC 15 GORNIA VRFŽINA	33 JASENOVIK	57 GRAMADA		18 SVRLjIG	45+916 KM 045+916 SC	46+010 NISEVAC	49+332 PALILULA 51 : 602 EXPLISE (18VIA)	2 SVKLJISKI MILJKOVAC 78 PODVIS	I RGOŠTE	68+365 KNJAŽEVAC	35 GORNJE ZUNIČE		77 MINIĆEVO	84+459 SELACKA REKA	96+074 VRATARNICA
	Chainage	Ш																						9 238+081							8 27+453														
	Distance in km	3	2,167	3,896	4,036	5,034	3 200	3.882	3,218	3,940	2,948	5,874	4,126	2,900	3 013	2,100	3,373	2,127	4,000	3,400	3 001	2 949	6,742	686'9	6,618	4,333			6,530	8.263	6,808	2,804	2,343	7,418	5,898	0,094	3,322	2,360	1.863	5,624	3,740	2,908	6,894	2,552	7,868
handover to public transport	Гей ітаск	2				9	1050		900	1958.						03.04.	.716					79 11 1967	03.10.	1963.	25.06.	1960.							15 12	1922	_							1014		T	
Date of	Right track	-				•	-	_	Č	1						0 •						20 1	0	-	2	1							-	. –	•						L	_	_	\perp	



	əbuitilA	30	148		128	116,1		115		7 70	+,+0	9'99			56.9	7,00		39,1	40,3	55,4				Ī		353,3				194			212,3		T	T		241	250	CC7	248,8	290
	Loading gauge	67	ZS-I	S-I	ŽS-I	S-I	ŽS-I	7 7	ZS-I	ŽS-I	7.S-I	ŻS-I	ŽS-I	ZS-I	1-SZ	1-07	S-I	ŽS-I	ŽS-I	ZS-I	1-07 ŽC 1	1	Že I	1	Н	ZS-1	5	ŽS-I		ŽC.1	ZS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	1-SZ	S-I	ŽS-I	ŽS-I	1-SZ	S-I	ŽS-I ŽS-I
[Vab] anil adt	— ←	28	7	N/S	7 2	8 Ž	Ż	10 2	_	Z	-	9	Ž	-	4 2 2	110	Z	4 Ž	9 Ž	4	10	1	,6	4	F,	- 2	1	12 Ž	J L	,,	1 12	2	8 Ž	Z×	7 ×	7 1	7	3 Ž	7 10	100	-	7 2
Ruling resistance of	\rightarrow		5		2	Н		10	-	,	+				+	7	T	-	H	5	+			-		6	1	3	1 1				8		t			∞	+	+	6	+
gradient	Slope	26	7		9	oo.		10	2	c	0	4			n 0	>		4	8	:	1			2		0		10		7	0	0	0	0	0 .	1	0	0	0	0	0	0 0
Ruling	Incline	-	2		1	8		10			1	0			0 0			1		5 .	1]				∞		2	J L	o	3 0	0		5	4 0	% '	00	ш		7) 6	5
[%] u	Gradient of the statio	``	0,0		0,0			3.0			1,0	0,0			1,0					5,0										0,71			5,8					9,1		0,0	6,0	2.0
sn	Міпітит сигче гаді		240		300	250		250	200	030	007	250		-	250	000		250	250	250	007				L					325	009	300	009	009	300	300	1000	300	300	300	350	350
nce and agens/freight	Open for the accepta dispatching of passer operations	22	P/F	Ъ	P/F	P/F		۵	ч	д г	4 0	P/F	Ь	Д ,	4 6	4 0		Ъ	P/F	P/F	F/F									4 0	ь	ь	Ь	4	24 E	4 0	ч	P/F	P	P/F	P/F	а а
	Occupancy of servic	\vdash			Ь	Ч		F	1	1)	Ъ			+				Ъ	A 6	4	4	Ш	1	n	Þ	1	DD	┨	4			ņ		4			H	F	2	ū	Þ
mrolta	Side-/end-loading pl	Н	S		S	S					-	S			S O	2		S	S	S	2	4		4		S	1	S		S	1		S		4	1	L	S	ŭ	2	S	S
	Freight car scales	П	+					+	10		+ 10	5	_	~ .		+			_		+	$\frac{1}{2}$		+			+	_	╁	_	+						_	5			H	m c
nıc	Service point code -	18	14021	14022	14060	14301		14101	14102	14103	14105	14106	14107	14108	14109	14111	14112	14113	14114	14115	141 /0					11113		11113		11001	11121	11102	11103	11129	11104	11119	11124	11106	11130	11108	11109	111128
the service point	Manner of securing	17	9		4	00		-	00	∞ c	0	8			» °	0		8	5	00 (^		9	•	9	9		9	JL	-	t		8		†	t	t	4	•	01	8	10
noitelu	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	- (Trnavac)	otation distance	Station distance		station distance		station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the longest trains		1d 3		1 and 2	nd 3		3			7 1111	2 and 3			and 2	c alla 2		and 3	nd 3	10 3	7 00	-1-		ımlina		2	1	2			t		nd 2		†	t	t	3	7	5 00	1d 3	
Рігестіоп В→А	Tracks for	-	2 and		1 aı	2 and) and	9		1 4	2 a			E C	7 9		2 at	2 and	2 and	- F	line innetion 1		Kurši	Ш		1		Polje		1		1 and		4				ć	7 and	2 and	Д.
	Maximum permitted train length		959		828	819		540	6	364	100	721		1	511	1		329	583	613	674	line		1		618	strat	618	0000	001			564					661	202	282	480	583
	longest trains	_	d 3		d 2	d 3		7	3	-	7 5	d 3			d 2	2	T	d 3	d 3	63	70	3" - Onen		ction	П		- Kastrat	1 1	t - Ko	Ť	Ť		d 2	T	T	Ť	T		0	6.5	d 3	
a←A	acceptance of the Tracks for	-	2 and		1 and	2 and) and	7		1 allu	2 and		,	l and	z and		2 and	2 and	2 and	I and			ne iur		2	ımliia	2	Çastra	4			1 and					3	,	7 and	2 and	3
Direction	Maximum permitted train length		959		828	819		540	2	264	100	721			511	747		329	583	613	674	ction		pen li		618	Kuršumliia	618	vac - I	009			564		T			661	202	282	480	583
pəəds	Гей изск	Н	1										Ш									ine iiir		0 - (ov	\vdash		222		Doljevac - Kastrat - Kosovo Polje						_					t	<u> </u>	
Maximum permitted	Right track	Н	(08/09	00(00)	(0/) 09		9								40							- Onen line innction	40	221 (Barlovo) - open line junction1" - Kuršumlija		20		20	223					5	20							1
K	Railway line categor	6	B2	B2	B 2	C	8	3 8	3	8	3 8	C3	C3	S	3	3 8	8 8	C	C3	<u>ප</u>	3 8	Zotina)	5	3		A A	4	Ą		ä	Bi	B1	B1	B1	B1	BI BI	BI	B1	A 4	4 4	A	A A
	Class of railway line	°	24 0	٦ ٦	R	¥	K	4 2	4 24	24	4 22	R	R	2	4 6	4 0	4	R	R	e4 6	4 2	コズ		4		24 24	4	24		ρ	4 24	ĸ	R	R c	× 1	X X	4 24	R	1 4	4 2	2	R R
əuj	Single/double-track	7	S -	S	S	S	S	מ מ	S	S C	2 02	S	S	S	S C	2 0	S	S	S	S C	מ מ	2	v	2		S	1	S		v	o co	S	S	S	S	N N	S	S	S O	v v	S	s s
1	Type of service poin	9	1	3 4	1	-	9	0 -	3		3	1	3	3	10	3		10	1	-	1		9		9	1		1 6		1	3	3	1	3		3 3	3 0	1	3	» «	-	8 3
	Chainage Name of service point	4	*7,052 103+046 GRLjAN 3 860 106+006 kW 106+006 TE	107+300	111+606	7,228 118+834 VRAŽOGRNAC	121+000 OPEN LINE JUNCTION 2			131+387	7,809 1307150 17DANOVAC 2 568 138+764 TABAKOVAČKA REKA	145+656				3,364 160±100 VIEL (ZOVO	3.416 163+608 MOKRANIA		174+128	887	501 185+070	107-001	04000 OPEN LINE JUNCTION 3			2,560 55+894 KURSUMLIJA 0,460 56+363 FND OF 1 INF		0+000 KURŠUMLIJA 2320 2+320 OPEN LINE JUNCTION KASTRAT		0+247 DOLjEVAC		1,797 6+597 JASENICA	10+096		12+700	2,000 14+/00 LUKOMIK 1 525 16+225 PODINA	18+800	22+327		0,720 31+734 10PLICKA MALA PLANA 2,766 34+500 BRESNIČIĆI		2.856 40+700 TOPLICA MILAN 2.018 42+718 PLOČNIK
	Distance in km	3	*/,	ń O	4	7,	2, 5	o c	3,6	*2,	, ,	9	2,	2,	2,	ń		4	,	7,	7 0	5		>		2,0	5	2			-	-	3,	0	- i	- 2,	2,	3,	2, 4	5 0	3	2,2
public transport	Гей изск	2									1914.																						28 02	1925.					04.12.	1929.	04 13	1929.
Date of handover to	Right track	-									15																						30	12 2					2	15	2	31



	9butitlA	30	313,6					381 4		430,4	500 0			1			84,2	84,9	84,5	67.79	89.2	89,5	88,2					113.2	109.2	110,3	T	75.0	6,61		T			83,1	3 02	81.5	81
	Loading gauge	201	I-S	ZS-1	1-SZ	ŽS-I	ŽS-I	ZS-1	ŽS-I	\perp	7. 7.	I-SZ	ŽS-I	S-I				ŽS-I	ZS-I	1-67 ŽC 1	I-S	ŽS-I	ŽS-I						ŽS-I	Н		-	ŽS-I		ŀ	ŽS-I	.		ZS-1	I-SZ	I-S
[Vab] anil adt	←	28	Ž	Z	7 10	- 2	N P	N IC	7	-	7 2	7	- 2	7			П	2 2	+	0	3 2	Ž	1 Ž						5	Ž			- Ž			3 Ž	.	7	7 10		- 2
Ruling Tesistance of	\rightarrow	27				7				10	15	1	15					2	2 0	0	4		-						2				5					I	v	0 4	-
Ruling gradient	adole	+	\vdash	+	9	\perp	0	0	+	\perp	15 0	+	\vdash	15 0				2 2	+	•	3		1						2 5				0		L	0 3	i	4	+	0 0	1 0
	Gradient of the statio	+	2,0 5	2 4	9 0	5 5		10 /	\perp	1,4 8	171		-	_			0,0	٠.	0,4	C,	1.8		0,3					-	2,7			F	4		F	T	.	2,0		5,0	
	Minimum curve radi	<u> </u>		300	250	300	300	300	300		400	300	300	300							200	450	700						300			-					.			300	
	Open for the acceptal dispatching of passer operations	22	Ъ	۵	4		М	4 0	Ъ	Ч с	ц д	, д	Ь										P/F		TA TOTAL	TAILOIN		P/F				ц	- 1 - 1	JIC JIC				P/F	P D/E	I/I	
anioq e	Occupancy of service	21	U		n	D		11)	n	11						I	U	b	0	n	U	Д			NETO.		Д	1			F	•	RAF			, [Ь	11	Þ	U
moth	Side-/end-loading pla	-					4	v.	2	S							S						ss S/E		1	01.17		S/F				_		ORI			,	S	-	v v	S
	Preight car scales		1	9 0	7		2	0 5	7	9 0	2 2	. 0	8	\dashv			9	2		+ 4	9	7	0 Yes		1	100		0	3 6			-		SED F	H			,	2 5	0 4	2
	Manner of securing t		8 1111	11126	9	9	11122	8 11115	Н	8 11116	8 11117	+	11118				1 23306	7 24202	+	24204	2 24206		4 25550		NOTE A THOU MAN TO THE OTHER TAXABLE TAXABLE	I DINE		4 2345	10 24313			10	10	LINE CLOSED FOR TRAFFIC	4	7		_	10 23002	10 23004	\perp
	gar offtert to renneM		Н	station distance	station distance		station distance	station distance	Н		station distance	distance	station distance	station distance	2)**)	rbas - Sombor TEMPORARILY SUSPENDED TRAIN SERVICE	Н	station distance	station distance	station distance			station distance		HYG	N TIEN			station distance	station distance	Sad (km 1+042) - Novi Sad Ložionica LINE CLOSED FOR TRAFFIC	- (Nac)	station distance		"3" - (Podbara)	station distance				station distance	
B→A	seceptance of the ongest trains		2					2	1	2 and 3	,	1			Z24 Kosovo Polje - Metolija - Pec **) Kosovo Dolie Teretra - onen line imortion 1 - (Drenica)**)	TRAIN	3 and 4	and	2 and 3	c pine 7	2 and 3	2	2 and 3					2 and 3	1 and 2		OSED FO		ame :					2 and 3	C pure	2 and 3	2 and 3
Direction	rain length Tracks for	141	410					557		565	403				Fec.	(DED	938	_	452 2		625		403	brika					+		JE CI	11111e jun			line j		<u> </u>	558	_	293	
	ongest trains Maximum permitted		4		+		+	2	Н	\vdash	4	+		-	ohija	JSPE	Н	\dashv	+	+		Н		ES fica fal				3 5	+		ica LD	open n	+		- ober		Ž		-	_	ш
A→B	receptance of the	13	2					2	1	2 and 3	0	1			- Mel	LY SI	3 and 4	2 and 3	2 and 3	z and z	2 and	2	2 and	Subo				2 and 3 594	1 and 2		ožion	1 200	T amo		I.		šančevi -	2 and	t cod	2 and	2 and 3
Direction	rain length	1 ~	410				1	557	+	505	403	3		-	o Polje	RARI	943	\dashv	492	+	625	\vdash	403 2 and 3	Subotica - Subotica fabrika				Suboutca -	+		Sad I	unction	+	3	Junctio		2	558	+	293	-
pəəds	Left track Maximum permitted		7						Ш	-			Ш	۲,	224 Kosovo Polje - Metohija - Pec Polje Teretra - onen line innetion	TEMP		7	1	1		4	7	301 Sut				302 Sur	1	L	- Nov	ul)		H:	en line		306 R				
Maximum permitted	Right track							•							224 corro Pol	Sombor				١					3	•	,	0	١		m 1+042	Foduara - open line junction open line junction	10	1	ki sancevi) - open line junction "1" - open line junction	10			•		•
A	Railway line categor	0	A	A A	t 4	A	Α.	A A	A	A	4	A	A ·	A	25 Ko	rbas -		C2	CZ	τ <	r A	A	Α		3	CC			A,	'A	Sad (k	rogna	C3	ည	kı sanc	C3			A <	K A	A
	Class of railway line	8	R	ж 2	4 2	R	R	X X	R	R	4 2	R R	R	R	ć	226 V		R	A	4 0	4 8	R	R		٠	L			Τ	Г	303 Novi	50	L		305 (Kıms	L	. [,	L	ı	L
əui	Single/double-track l	7	S	ss v	2 00	S	S	y v	ш	S	מ מ	S	S	S			L,	S	S C	2 0	o so	S	S		٥	o s			S	S	303		S	S	305	S		,	ss v	n v	S
;	Type of service point	9	00	m r	ی م	0	m (2 2	3	1 0	n «		3	13			1			7 6	1	10	-			-		-	-			-	9	9	٧	0	,	- 0	× -	1-	-
	Chainage Name of service point		46+646	54 49+300 NOVOSELSKE LIVADE							20 /5+/00 KOSANICA 05 75+805 KOSANČIĆ IVAN	79+000		43 84+400 ADMINISTRATIVE LINE				16 47+653 KULA		02 02+0/0 31VAC		55 79+695 CONOPLJA	15 89+710 SOMBOR			31 6+139 END OF LINE	3) up to km 002+330 maximum permissible speed is 20 km/h	1+255 SUBOTICA	45 3+600 SUBOTICA BOLNICA			4±413 TO TEABA			0+000 OPEN I NE II NCTION 1		>			27+355	34+016
	Distance in km		3,928	2,654	1 334	1,521	4,245	2,010	4,515	2,555	2,820	3,105	4,057	1,343				10,516	7,318	207,7	9.7	4,255	10,015		2 700	2,431	+330 max		2,345	0,400			2,169	1,077		0,910		,	0,496	7.621	6,661
handover to public transport	Right track Left track			.90.90	1930.					15.05.	1949.								-	1006		1			08.01.	1885.	o to km 002+									01.03. 1969.			02.07.	1899.	
To ste Of	-doest trinis																										ε μ									01.	\Box				



	Altifude	30	1377	140.1	147,7	147,7		11	77	11	77	3 (0	02,7	1,00	I	101.7			167	193,4	245.9		271,5		T	101	101	84	73	72	89,5	89,5			101	Ī	80	T	T	Ī		T	1
	Saugg gaibeo	30		ŽS-I	ŽS-I	ŽS-I			I-S	ŽS-I	ZS-I	F	ŽC I	1-01		ŽS-I	ŽS-I	ŽS-I	ŽS-I	-S-1	1-SZ	ŽS-I	ŽS-I	Z-I			ŽS-I	7.S-1	1-67	I-SZ	ŽS-I	ŽS-I			I-SZ	1		I-S7			Н	ŻS-I ŻS-I	
[Visb] anil adt	←	28			3 2	3 2				5	7	ŀ	2	4	H	4	Н	77	1	7 -	1	Ž	-	7				2	7 10	+	4	Ž		ľ	+		-	-			\vdash	6	1
Ruling Tesistance of	\rightarrow	27			5	5				2			1	2		4			∞ (_	=		18					0	v	•	9					1						1	1
Ruling gradient	globe	-			2	2			L	3		L	1		L		Н	\dashv	0	+	0		0	4			Н	~	0	+	4			L	_		_	0			Ш	∞	$\frac{1}{1}$
	oranean or an same	Н	0.0	2.0	0,0	0,0		0.5	0,2	2,0 1	8,0	00	10,0	=	H	1.9			0,0		10		0,0	\dashv		2,5		2,15 4	0,0		2,0 5	1,5		,	2,5	1	H	0			Н	0	1
	Creatient of the statio	H	-	00/		00/		Ĺ		300		F	300	30		338					250	400	230 (200		280	300		300					F	+			800			Ц	+	
	operations Minimum curve radio								Τ	-		ŀ	ļ.			,,,	7	-	+	_		7							-					ŀ	+	-	<u> </u>	_			Н		-
	Open for the acceptants of passen				P/F			P/F	Ь	М					P/F	1			,	14						P/F								,	P/F	1	P/F				F	ш	
	Occupancy of service	_	٥	4	Ъ			٩	•	Ч		ľ			٩	<u>.</u>			þ	ī	n		n			Ъ			11	0	n			,	d D		Ъ				Ъ	1	
mion	slq gnibsol-bnə/-əbi8	20						S.	2						S.	o o				S	S		S			S/E					S			į	S/E		S				S		
	Preight car scales	12		1					L	Ш		L	1		L	L	Ш		_	4				_		Yes	Ц	4	_	1	L				Yes			4			Ц	_	$\frac{1}{4}$
nıc	Service point code -	18		16316	16317	16317		21001	16014	21101					13404	13901	13902	13903		13905	13907	13908	13909			21009		21301	21302	21304	21305			0000	21009		22850				16203	16205	
he service point	Manner of securing t	17		1	4	4				4	_	⊸ l		-	E	9			,	9	9		9			7		1	c	,	6			,		1	;	10			-	10	
noitelu	gen offfert to renneM	16	Borina - Zvornik Grad	station distance	station distance	station distance			station distance	station distance	ts l	junction point 25 - (Orom	station distance	Station distance		station distance	station distance	station distance		station distance	station distance	station distance	station distance	station distance			station distance	station distance	station distance	station distance	station distance	station distance				3)		station distance	VEFIC FIC	2		station distance	
	scceptance of the ongest trains	15 7	1 - ZV01		2 and 3			nd 3		nd 4				(Recavira)	5				1	2	2		4			5 pu		1	1 2004 2	7 110 7	2 and 3			:	c pu	(km 6+413)	2 and 3	AT O	TRAF		3		1
Direction B→A	ltacks for		Sorina	+	\top	-	lovica	2 and		3 and		77 Junt 77		1		L	Н		_	1				4		4 and	Н	1	+	\top	2 a	Н			4 and			- 6	FOR		Н		$\frac{1}{2}$
	Maximum permitted rain length	4	onaj		398		- Pančevo Voilovica	506	8	174		od nor		- Despototrac	812	299			8	790	764		206	*	n 'n	643			753	66/	681		SE	· Vršac Vašarište	£	sirćetni kompleks	842	TOCE	LUSE	ečmer	733		
	acceptance of the ongest trains	13			nd 3		ančev	2 and 3		3 and 4	Ι.	Junct		Jecmo	4	3			1	3	2		4		Prizre ela Ci	4 and 5			1 204 7	7 01	2 and 3		Z L	ac Va	c pi	etni k	2 and 3	- Car	A CL	ovo B			1
Direction A→B	Fracks for	1			2 and		roš - F	2 31		3 at		oka)	1	1 - Jac					ľ				1		nija - ac - B	4 aı			-	=	2 at		TING	- Vrš	4 ai	o siró	2 ar	150	ala L	- Jak			
Discosion	Maximum permitted rain length	12	- OPEN LINE JUNCTION Donay		398		309 Pančevo Varoš	506	3	174	,	Senta: (Coka) - junction point		- Svilainac		299			8	790	764		206) Material	312 Metonija - Prizren *** 313 Vršac - Bela Crkva	643			753	CCI	681		SHUNTING LINES		643	- Metanolsko	842	do of	03 Bogojevo - Dunavska obala LINE CLOSED FOR 1 RAFFIC 404 Paraćin - Stari Ponovac I.NF CI.OSED FOR TRAFFIC	405 Surčin - Jakovo Bečmen	733		
peeds	eft track		L L	50		+	9 Pand			00		tion S	0	311 Markovac -	NO A		20							,	3				30					401	0			Ž	Stari	40	1	20	
Maximum bermitted	Zight track	12	5	Ś		'	30			^		the station	40	Mar	TATO		Č	4				Ċ							3						20	Kikinda	4		ojevo raćin			20	
. A	Railway line category	6	brasına)	Ą	A	Ą			D2	D2	D2	rack of t	<		+	B2	Ą	A	Α.	Α.	K A	A	Ą	A			A	Α.	4 <	4	Ą	Ą		F	2	7	١.					A A	
	Class of railway line		308 -	1	L	T			1	+		₽!	-	1	F	-	ı	ı	ᆲ,	٦,	1 1	Г	ı	ı			ı,	٦,	٦,	1 1	ı	L		f	man	-		man	504			man	
əui	Single/double-track l	П	~	S	S	S			S	S	S .	nectif	ŭ	2	r	v	S	S	S	S	n s	S	S	S			S	S C	2 0	2 2	S	S		t	S	7		2				SS	٦
	Type of service point	Н	y	3 0	-	1		-	3	-	-	310 Connecting	12	71	-		3	3	_,		2 -	3	1	\dashv		-	9	» (2 -	3	-	Н		,	2 1	,	_	+				-	1
		П								П	7	7			r	t	П			1								\dagger						f	+	†		7			Н		1
	Chainage Name of service point		68±685 OPEN I INE IIINCTION DON: A BORINA			75+300 ZVORNIK GRAD	5 up to km 074+000 the maximum permissible speed is 10 km/n	0+568 PANČEVO VAROŠ			3+475 END OF LINE	28 ±407 HINCTION BOINT 22 SENTA	30+164 IIINCTION POINT 22 SENTA		0+500 MARKOVAC	9+932 SVILAJNAC	17+500 SEDLARE	23+200	27+470		30+400 VOJNIK 42+564 DVORIŠTE	45+800 DUTOVO		53+750 END OF LINE		87+546 VRŠAC		97+263	102+599 S1RAZA 102+515 IA SENOVO	114+649		121+500		STORES OF STREET	0+558 VRSAC 3+415 VRŠAC VAŠARIŠTE		0+000 KIKINDA					15+500 JAKOVO-BEČMEN 16+500 END OF LINE	
	Distance in km	3		1.915	2,854	1,846	000 the max		0,732	1,614	0,561		0.757	10,10		9.432	7,568	5,700	4,270	7,350	6.164	3,236	7,560	0,390			1+118	8+599	7+430	7+134	4+418	2+433			2,857	í	100	0,285				3,400	
public transport	ंसी प्रावटी	2			15.05. 1950. —		km 074+0		11.11.	1935.					01.09	1951.		29.11.	1951.			.1967					.07	1858.			01.11. 1856.												
Date of handover to	Sight track	ı			15.0		*) up t		=======================================	ĩ					0	-		22	-			=					20	ñ			01.11					L							



	_	_	_		_	_	_	_	_	_			
											30	Altitude	
											50	Loading gauge	
											28	←	the line [daN]
											27	\rightarrow	Ruling resistance of
				Г							26	Slope	gradient
											25	Incline	BulinA
											24	Gradient of the statio	[%] u
											23	Minimum curve radio	sr
		Ъ	Ъ	Ь							22	Open for the acceptar dispatching of passen operations	
.		T	n	T							21	Occupancy of service	
											20	side-/end-loading pla	
												Freight car scales	
											18	Service point code -	nıc
											17	Manner of securing t	ne service poi
	station distance	station distance	station distance		(pı		FIC	IC	IC	- Sremska Rača Nova - state border - (Bijeljina) LINE CLOSED FOR TRAFFIC	16	ger offtraffe reg	noiælu
					išegra		TRAI	RAFF	RAFF	OSEI		longest trains	
					r - (V	NE	FOR)R T	R T	ECL	15	Tracks for	B→A
					orde	(Y L)	ED I	DFC	DFC	Z	14	train length	Direction
.					ate B	LWA	SOT	OSE	OSE	(jina)	1	Maximum permitted	
					ı - St	RAI	NE (ECI	ECI	Bije	13	acceptance of the longest trains	
					Gora	RIST	ra LI	Ľ	Z	er - (1	Tracks for	A→B
					Mokra	-TOU	Sajdob	abrika	a Skela	te bord	12	Maximum permitted train length	Direction
			_		501 Šargan Vitasi - Mokra Gora - State Border - (Višegrad)	MUSEUM-TOURIST RAILWAY LINE	Bačka Palanka - Gajdobra LINE CLOSED FOR TRAFFIC	408 Sonta - Apatin Fabrika LINE CLOSED FOR TRAFFIC	407 Ovča - Padinska Skela LINE CLOSED FOR TRAFFIC	va - sta	==	Гей таск	pəəds
	20		30		argan V	MI	čka Pal	onta - 1	vča - F	ača No	10	Right track	Maximum
					501 Š		409 Ba	408 S	407 C	ıska R	6	Railway line category	A
							4			Sren	8	Class of railway line	
	S	S	S							406 Šid	7	Single/double-track li	əu
	13	1	2	1						406	9	Type of service point	
ine km positions												point	
*) Distance in km between the service points is not equal to the difference of their line km positions	ORDER	GORA		VITASI							5	Name of service point	
ice points is not equal	276+951 STATE BORDER	270+146 MOKRA GORA	262+262 JATARE	254+706 ŠARGAN VITASI							4	Chainage	
the serv				25								. 10	
m between	6,805	7,884	7,556								3	Distance in km	
nce in k											2	Гей івск	public transport
	- 1										. 1		handover to

In columns 25-28, for double-track railway times where the ruling line gradient or resistance differ for the right and left track, the data are provided for each track separately; the munemator relates to the right and the denominator to the left track (from the beginning towards the end of the line) ***) Until May 1th 2025 Railway line category D4

Track transition State border
 Track transiti Dispatching point and stop
Traffic and transport dispatching point 9. 10. 11. Train recording point and stop Open-line junction and stop Open-line junction Type of service point Passing point 3. Stop Col.6

Column 10 and 11- datum referred to in brackets indicate maximum permitted speed for DMU
Col.17-Manner of securing the sec Col.17- Manner of securing the service point

. Electro-relay signalling safety devices for comprehensive centralisation od turnouts, signals and routes. There is technical dependance between turnouts and signals 2. Electro-relay signalling-safety devices for partial centralisation od tumouts, signals and routes. There is technical dependance between tumouts and signals. 3. Electro-relay signalling-safety devices - key dependance between tumouts, signals and routes. There is technical dependance between tumouts and signals.

Electron-tay against season of the season light signals. There is no dependance between tumouts and signals.

Electron-telay against season there is technical dependance between tumouts and semaphore signals.

Electron-technical block device. There is technical dependance between tumouts and semaphore signals.

Mechanical signal point machine. There is technical dependance between tumouts via keys and semaphore signals.

Mechanical signal point machine. There is technical dependance between tumouts and semaphore signals.

Electron-echanical permissive block device. There is no technical dependance between tumouts and semaphore signals.

Ordinary signal point for semaphore signals.

Col.20-. S for the service point with side-loading platform, E for the service point with end-loading platform and S/E for the service point with side-loading platform. 11. Access signals. Tumouts are secured by locking devices without signal.

Col 21 P for permanently manued, U for permanently unmanmed and T for temporantly manued service points open for the acceptance and dispatching of passengers. T for service points open for the acceptance and dispatching of passengers, T for service points open for the acceptance and dispatching of passengers and for fleight operations



Appendix 7. Overview of primary train delay causes

	Primary train delay causes (IŽS)
No	Name
1.	Waiting for dispatch
2.	Waiting at the automatic block signal or protective signal
3.	Dispatcher's order
4.	Delay caused by the fault of an infrastructure manager's employee
5.	Entrance/exit to a turn
6.	Traffic on the left track
7.	Speed decrease requested by the infrastructure manager
8.	Delivery of order to the train driver
9.	Unplanned line closure by the infrastructure manager
10.	Level-crossing failure
11.	Failure on the overhead contact line
12.	Extended stay of railway vehicles
13.	Delay caused by restricted-speed running
14.	Rail crack
15.	Deformed track
17.	Technically defective switch
18.	Collision, bumping, derailment, avoided collision of railway vehicles
19.	Failure of signalling-interlocking and telecommunication devices
20.	Extension of the foreseen closure (more than 30 min)

	Primary train delay causes (railway undertaking)
No	Name
1.	Increased passenger frequency
2.	Waiting for railway undertaking staff
3.	Waiting for locomotive or multiple-unit set
4.	Delay caused by the fault of an railway undertaking's employee
5.	Cleaning of wagon or multiple-unit set requested by the railway undertaking
6.	Brake test
7.	Failure of wagon, traction unit or multiple-unit set
8.	Wagon repair without de-coupling
9.	Decreased train speed due to failure of wagon/multiple-unit set/traction unit
10.	Change of composition requested by the railway undertaking
11.	Intervention of police officers, requested by train staff
13.	Waiting for shunting locomotive
15.	Shift change of railway undertaking's employees



16.	Waiting for train forming
17.	Weighing
18.	Special consignment transport
20.	Stopping for cooling of brake shoes
21.	Delay caused by turnover of the multiple-unit set/traction unit of the same composition
22.	Accident on industrial siding of the transport client
23.	Breakdown of brake system air duct
24.	Train passing by the signal which indicates that the further running is forbidden
25.	Unallowed train passing through the service point where it had to stop

	Primary train delay causes (external influences)
No	Name
1.	State needs
2.	Train accepted with delay by another railway management
3.	Train rejected by another railway management
4.	Waiting for train staff of another railway management
5.	Train incorrectly formed by another railway management
6.	Taking a defective wagon of another railway management out of service
7.	Taking an incorrectly sent wagon of another railway management out of service
8.	Another railway management's employee being late
9.	Natural disasters (landslide, flood, current, snow-drift, avalanche, fire, fog)
10.	Falling out of train
11.	Jumping in or out of train
12.	Holding of the train by police officers
13.	Holding of the train by custom-inspection officers
14.	Emergency brake abuse
15.	Emergency service intervention
16.	Level-crossing device breaking
17.	Train rocking
18.	Theft of equipment or devices owned by the infrastructure



	Secondary train delay causes
No	Name
1.	Waiting for crossing
2.	Waiting for overtaking of a train
3.	Waiting for annunciation
4.	Waiting with the train which is in delay
5.	Extended stay in the station due to waiting for regular passing
6.	Waiting for locomotive or multiple-unit set from turnover
7.	Waiting for railway undertaking's staff from turnover
8.	Delay caused by failure of another train's traction unit
9.	Waiting for train connection (passenger or goods) of another railway management
10.	Abuse of emergency brake on another train
11.	Announced strike of IŽS or RU
12.	Another train accident



Appendix 8. Overview of platforms and arranged surfaces in service points

		km position of the		T	Dimensions	,	
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width	
Service point	Location	of platform	surface	(m)	(m)	(m)	
1	2	3	4	5	6	7	
1		MAIN LINES	+	<u> </u>	Ü		
101 Belgrade Center- Stara Pazova- Šid- state border - (Tovarnik)							
	next to 3rd track	0+120-0+00-0+300	platform	420,00	0,55	10,00	
	between the 4th and 5th track	0+155-0+00-0+300	platform	455,00	0,55	10,00	
BELGRADE CENTER	between the 6th and 7th track	0+155-0+00-0+300	platform	455,00	0,55	10,00	
DELORADE CENTER	between the 8th and 9th track	0+133-0+00-0+300	platform	420,00		10,00	
		0+120-0+00-0+300			0,55	7,00	
	next to 10th track next to 1st track	3+204,17 - 3+679,48	platform platform	420,00 475,00	0,55 0,55	5,60	
	between the 1st and 2nd	3+204,17 - 3+679,48	piationii	475,00	0,55	3,86	
	track*	3+204,17 - 3+079,46	platform	473,00	0,55	3,00	
	between the 2nd and 3rd track	3+204,17 - 3+679,48	platform	475,00	0,55	10,46	
NOVI BEOGRAD	between the 3rd and 4th	3+204,17 - 3+679,48	<u>r</u>	475,00	0,55	3,86	
	track*	31204,17 31077,40	platform	475,00	0,55	3,00	
	between the 4th and 5th track	3+204,17 - 3+679,48	platform	475,00	0,55	10,46	
	next to 5th track	3+204,17 - 3+679,48	platform	475,00	0,55	5,60	
	next to 5th track	5+104,79 - 5+274,76	platform	110,00	0,55	4,00	
Tošin bunar	next to left track	5+104,79 - 5+274,76	platform	110.00	0,55	4,00	
	between the 1st and 2nd track	8+276 – 8+676	platform	400,00	0,55	6,16	
	between the 3rd and 4th track	8+276 - 8+676	platform	400,00	0,55	6,16	
ZEMUN	between the 6th and 7th track	8+321 – 8+676	platform	355,00	0,55	6,16	
	between the 8th and 9 th track	8+321 - 8+676	platform	355,00	0,55	6,16	
Altina	next to left track	11+256 – 11+366	platform	110,00	0,55	4,00	
Alulia	next to right track	10+997 – 11+107	platform	110,00	0,55	4,00	
	between the 1st and 2nd track	12+264 -12+374	platform	110,00	0,55	4,00	
ZEMUNSKO POLJE	between the 2nd and 3rd track	12+204 -12+374	platform	220,00	0,55	6,16	
	between the 3rd and 4th track	12+134 -12+374	platform	110,00	0,55	4,00	
	next to left track	13+955 – 14+065	platform	110,00	0,55	4,00	
Kamendin	next to right track	13+744 – 13+854	platform	110,00	0,55	4,00	
	next to 1st track	18+884 – 19+104	platform	220,00	0,55	4,00	
BATAJNICA	between the 2nd and 3rd track	18+884 – 19+104	platform	220,00	0,55	6,16	
BATASINICA	next to 6th track	18+884 – 19+104	platform	220,00	0,55	7,41	
NOVA PAZOVA	between the 4th and 5th track	26+993-27+243 l.n.	platform	250,00	055	7,91	
	next to 1st track	35+015-35+235 l.n.	platform	220,00	0,55	3,00	
STARA PAZOVA	between the 5th and 6th track	35+015-35+265 l.n.	platform	250,00	0,55	6,16	
	between the 2nd and 3rd track	45+767-45+914	platform	147,00	0,35	1,60	
GOLUBINCI	between the 3rd and 4th track	45+767-45+914	platform	147,00	0,35	1,60	
D. 1991	between the 2nd and 3rd track	53+611,93-53+691,91	platform	79,98	0,35	1,60	
PUTINCI	between the 3rd and 4th track	53+611,93-53+691,91	platform	79,98	0,35	1,60	
	next to right track	59+982,18-60+062,18	platform	80,00	0,55	4,00	
Kraljevci	next to left track	59+985,29-60+065,29	platform	80,00	0,55	4,00	
	between the 2nd and 3rd track	64+733-64+973	platform	240,00	0,35	1,60	
RUMA	between the 3rd and 4th track	64+733-64+973	platform	240,00	0,35	1,60	
	between the 4th and 5th track	65+821-64+937	platform	116,00	0,35	1,60	
MOCANI	between the 2nd and 3rd track	73+368-73+518	arranged surface	150,00	0,00	2,00	
VOGANJ	between the 3rd and 4th track	73+368-73+518	arranged surface	150,00	0,00	2,00	
CDEMCEA MITPOVICA	between the 2nd and 3rd track	81+563-81+763	platform	200,00	0,35	1,60	
SREMSKA MITROVICA	between the 3rd and 4th track	81+563-81+763	platform	200,00	0,35	1,60	
Laćarak	between the right and left track	86+109,30-86+159,30	platform	50,00	0,35	1,60	
MADTING	between the 2nd and 3rd track	94+059-94+159	platform	100,00	0,35	1,60	
MARTINCI	between the 3rd and 4th track	94+131-94+141	platform	10,00	0,35	1,60	
Kuzmin		NONE					
KUKUJEVCI-ERDEVIK	between the 2nd and 3rd track	104+935-104+985	platform	50,00	0,45	1,60	
	between the 3rd and 4th track	104+990-105+040	platform	50,00	0,45	1,60	
Bačinci	next to right track	109+070-109+097	platform	27,00	0,35	1,60	
Gibarac		NONE	<u> </u>				
~	between the 1st and 2nd track	116+300-116+490	arranged surface	190,00	0,10	2,50	
ŠID	between the 2nd and 3rd track	116+300-116+665	platform.	365,00	0,45	1,60	
	between the 3rd and 4th track	116+300-116+677	platform	377,00	0,45	1,60	
102 Belgrade Cent	er– Junction "G" – Rakovica - M	<u> Hadenovac - Lapovo - Niš</u>	- Preševo - state bo	rder - (Ta	banovce)		



Service point	Location	km position of the beginning and the end	Platform/arranged	Length	Dimensions Height	s Widt
service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	next to 3rd track	0+120-0+00-0+300	platform	420,00	0,55	10,00
	between the 4th and 5th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
BELGRADE CENTER	between the 6th and 7th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
	between the 8th and 9th track	0+120-0+00-0+300	platform	420,00	0,55	10,00
	next to 10th track	0+120-0+00-0+300	platform	420,00	0,55	7,00
	next to 2nd track - right	8+460-8+786	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00	0,55	6,10
	between the 5th and 6th track	8+545-8+865	platform	320,00	0,55	6,20
17. *	next to right track	10+645-10+758	platform	113,00	0,55	1,55
Kneževac	next to left track	10+645-10+758	platform	113,00	0,55	1,55
Kijevo	next to right track	11+626-11+731	platform	105,00	0,55	1,55
Kijevo	next to left track	11+713-11+819	platform	106,00	0,55	1,55
	next to 1st track	14+080-14+240	arranged surface	160,00	0,55	4,00
RESNIK	between the 1st and 2nd track	14+080-14+240	platform	160,00	0,35	1,55
	between the 3rd and 4th track	13+943-14+238	platform	295,00	0,55	6,20
PINOSAVA		NONE				
Ripanj Kolonija	next to railway line - left	20+080-20+180	platform	100,00	0,35	1,00
	between the 1st and 2nd track	21+324,00-21+356,40	platform	32,40	0,35	1,00
RIPANJ	between the 2nd and 3rd track	21+265,70-21+361,20	platform	95,50	0,35	1,55
	between the 3rd and 4th track	21+265,70-21+361,20	platform	95,50	0,35	1,55
KLENJE	between the 1st and 2nd track	24+743,40-24+804,00	platform	60,60	0,35	1,00
	between the 2nd and 3rd track	24+743,40-24+804,00	platform	60,60	0,35	1,00
RIPANJ TUNEL	between the 1st and 2nd track	29+565-29+615	platform	50,00	0,40	1,60
RALJA	between the 1st and 2nd track	34+695-34+774	platform	79,00	0,40	1,60
	between the 2nd and 3rd track	34+695-34+774	platform	79,00	0,40	1,60
SOPOT KOSMAJSKI	between the 2nd and 3rd track	41+454-41+544	platform	90,00	0,40	1,60
VLAŠKO POLJE	between the 2nd and 3rd track	47+684-47+784	platform	100,00	0,40	1,60
MLADENOVAC	between the 2nd and 3rd track	53+089-53+190	platform	101,00	0,40	1,60
	between the 3rd and 4th track	53+030-53+190	platform	160,00	0,40	1,60
KOVAČEVAC	between the 1st and 2nd track	59+954-60+109	platform	155,00	0,40	1,60
	between the 2nd and 3rd track	59+907-60+056	platform	149,00	0,40	1,60
Rabrovac	next to railway line - left	62+909-63+045	platform	136,00	0,40	1,60
KUSADAK	between the 1st and 2nd track	67+497-67+650	platform	153,00	0,40	1,60
	between the 2nd and 3rd track	67+453-67+600	platform	147,00	0,40	1,60
Ratare	next to railway line - left	70+821-70+931	platform	110,00	0,40	1,60
GLIBOVAC	between the 1st and 2nd track	73+941-74+041	platform	100,00	0,50	1,50
	between the 2nd and 3rd track	73+978-74+078	platform	100,00	0,50	1,50
B.1. (3777)	between the 1st and 2nd track	78+476-78+586	platform	110,00	0,50	1,50
PALANKA	between the 2nd and 3rd track	78+476-78+586	platform	110,00	0,50	1,50
MALA DI ANIA	between the 3rd and 4th track	78+476-78+586	platform	110,00	0,50	1,50
MALA PLANA	between the 2nd and 3rd track	85+505-85+605	platform	100,00	0,50	1,50
	between the 1st and 2nd track between the 2nd and 3rd track	90+350-90+400	platform	50,00 141,00	0,40	1,60 1,60
VELIKA PLANA		90+289-90+430 90+370-90+510	platform		0,40	
	between the 3rd and 4th track between the 4th and 5th track	90+370-90+310	platform platform	140,00	0,40	1,60
	next to right track	90+360-90+464	platform	104,00 47,00	0,40 0,40	1,60
Staro Selo	next to right track	94+008-94+055	platform	47,00	0,40	1,60
	next to right track	97+660-97+706	platform	46,00	0,40	1,60
Novo Selo	next to right track	97+660-97+706	platform	46,00	0,40	1,60
	between the 2nd and 3rd track	100+400-100+450	platform	50,00	0,40	1,60
MARKOVAC	between the 3rd and 4th track	100+350-100+452	platform	102,00	0,40	1,60
MINIO TIC	between the 4th and 5th track	100+350-100+448	platform	98,00	0,40	1,60
	next to right track	106+250-106+310	platform	60,00	0,35	1,6
Lapovo Varoš	next to left track	106+250-106+310	platform	60,00	0,35	1,60
	next to right track	108+350-108+400	platform	50,00	0,35	1,60
Lapovo Marshalling Yard	next to left track	108+340-108+390	platform	50,00	0,35	1,6
	next to 1st track	109+460-109+510	platform	50,00	0,35	1,6
LAPOVO	between the 2nd and 3rd track	109+560-109+680	platform	120,00	0,35	1,60
Lin O 10	between the 3rd and 4th track	109+560-109+680	platform	120,00	0,35	1,60
	next to right track	114+140-114+190	platform	50,00	0,35	1,60
Brzan	next to left track	114+140-114+190	platform	50,00	0,35	1,60
Miloševo	next to right track	116+940-116+990	platform	50,00	0,35	1,60



Carriag naint	Location	km position of the beginning and the end	Platform/arranged		Dimensions	Width
Service point	Location	of platform	surface	Length (m)	Height (m)	Width (m)
1	2	3	4	5	6	7
1	next to left track	116+940-116+990	platform	50,00	0,35	1,60
	between the 2nd and 3rd track	120+229-120+330	platform	101,00	0,35	1,60
BAGRDAN	between 3 rd and 4th track	120+268-120+390	platform	122,00	0,35	1,60
	next to right track	126+920-126+970	platform	50,00	0,35	1,60
Lanište	next to left track	126+920-126+970	platform	50,00	0,35	1,60
	next to right track	131+229-131+279	platform	50,00	0,35	1,60
Bukovče	next to left track	131+229-131+279	platform	50,00	0,35	1,60
	between the 1st and 2nd track	135+192-135+342	platform	150,00	0,20	1,90
IAGODINA	between the 2nd and 3rd track	135+122-135+364	platform	242,00	0,20	1,90
JAGODINA	between the 3rd and 4th track	135+182-135+416	platform	234,00	0,20	1,90
	next to right track	140+550-140+670	platform	120,00	0,55	3,00
Gilje	next to left track	140+550-140+670	platform	120,00	0,55	3,00
,	between the 3rd and 4th track	155+081-155+184	platform	103,00	0,35	1,60
PARAĆIN	between the 4th and 5th track	155+065-155+166	platform	101,00	0,20	1,90
	next to right track	163+560-163+610	platform	50,00	0,35	1,60
Sikirica- Ratari	next to light track	163+565-163+615	platform	50,00	0,35	1,60
	next to right track	166+605-166+655	platform	50,00	0,35	1,60
Drenovac	next to light track	166+605-166+655	platform	50,00	0,35	1,60
<i>t</i> _ <i>t</i>	between the 2nd and 3rd track	171+550-171+640	platform	90,00	0,35	1,60
ĆIĆEVAC	between 3rd and 4th track	171+550-171+640	platform	90,00	0,35	1,60
	next to right track	173+625-173+674	platform	49,00	0,35	1,60
Lučina	next to left track	173+625-173+674	platform	49,00	0,35	1,60
	between the 2nd and 3rd track	176+222-176+425	platform	203,00	0,28	6,40
STALAĆ	between the 4th and 5th track	176+222-176+425	platform	203,00	0,28	1,60
STILLIC	between the 6th and 7th track	176+270-176+378	platform	108,00	0,28	5,30
STEVANAC	between the our that thek	NONE		100,00	0,20	3,30
	between the 2nd and 3rd track	186+443-186+563	platform	120,00	0,35	1,60
BRALJINA	between the 3rd and 4th track	186+443-186+563	platform	120,00	0,35	1,60
Cerovo-Ražanj	next to railway line - left	190+320-190+370	platform	50,00	0,35	1,60
STARO TRUBAREVO	between the 1st and 2nd track	192+150-192+220	platform	70,00	0,35	1,60
TIMO INODINE VO	between the 2nd and 3rd track	194+882-195+003	platform	121,00	0,35	1,60
ĐUNIS	between the 3rd and 4th track	194+882-195+003	platform	121,00	0,35	1,60
	next to right track	199+160-199+210	platform	50,00	0,35	1,60
Vitkovac	next to light track	199+160-199+210	platform	50,00	0,35	1,60
	next to right track	201+175-201+225	platform	50,00	0,35	1,60
Donji Ljubeš	next to left track	201+175-201+225	platform	50,00	0,35	1,60
	next to right track	203+560-203+610	platform	50,00	0,35	1,60
Gornji Ljubeš	next to light track	203+560-203+610	platform	50,00	0,35	1,60
	between the 2nd and 3rd track	205+565-205+675	platform	110,00	0,35	1,60
KORMAN	between 3rd and 4th track	205+545-205+665	platform	120,00	0,35	1,60
	next to right track	208+087-208+186	platform	99,00	0,35	1,60
Trnjani	next to left track	208+087-208+186	platform	99,00	0,35	1,60
	next to 1st track	210+445-210+530	platform	85,00	0,33	5,00
ADROVAC	between the 1st and 2nd track	210+445-210+530	platform	89,00	0,28	1,60
ADNUVAC	between the 1st and 2nd track	210+432-210+321	platform	122,00	0,35	1,60
	between the 2nd and 3rd track	210+440-210+362	platform	210,00	0,35	1,60
ALEKSINAC	between the 3rd and 4th track	214+067-214+277	platform	210,00	0,35	1,60
	next to right track	217+400-217+500	platform	100,00	0,35	1,60
Nozrina	next to left track	217+400-217+500	platform	100,00	0,35	1,60
	next to right track	218+705-218+790	platform	85,00	0,35	1,60
Lužane	next to left track	218+708-218+785	platform	77,00	0,35	1,60
	next to right track	222+062-222+164	platform	102,00	0,35	1,60
Tešica	next to left track	222+062-222+164	platform	102,00	0,35	1,60
	between the 2nd and 3rd track	224+656-224+758	platform	102,00	0,35	1,60
GREJAČ	between the 3rd and 4th track	224+656-224+738	platform	52,00	0,35	1,60
	next to right track	228+087-228+155	platform	68,00	0,35	1,60
Supovački Most	next to left track	228+087-228+133	platform	68,00	0,35	1,60
	next to left track	229+306-229+416	platform	110,00	0,35	1,60
Mezgraja			•		0,35	
	next to left track	229+306-229+416	platform	110,00		1,60
Vrtište	next to right track	232+544-232+631	platform	87,00	0,35	1,60
	next to left track	232+544-232+631	platform	87,00	0,35	1,60
TRUPALE	between the 2nd and 3rd track	234+893-234+994	platform	101,00	0,40	1,60
	between the 4th and 5th track	234+893-234+994	platform	101,00	0,40	1,60



		km position of the		I	Dimension	S
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width
		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00	0,40	1,60
	next to 1st track	243+410-243+763	platform	353,00	0,40	5,80
v	between the 2nd and 3rd track	243+410-243+813	platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
	between 1b. and 1. track	243+643-243+763	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
MEĐUROVO		NONE	1.6	01.00	0.40	1.60
BELOTINCE	between the 1st and 2nd track	253+906-253+987	platform	81,00	0,40	1,60
Čapljinac	next to railway line - left	255+443-255+493	platform	50,00	0,40	1,60
Malošište	next to railway line - left	257+890-257+940	platform	50,00	0,40	1,60
DOLJEVAC	between the 1st and 2nd track	261+419-261+527	platform	108,00	0,40	1,60
	between the 2nd and 3rd track	261+419-261+526	platform	107,00	0,40	1,60 1,10
Kočane	next to railway line - right	263+218-263+263 263+274-263+287	platform	45,00	0,40	
	next to railway line - right next to railway line - right		platform platform	13,00 29,00	0,40 0,40	1,10 1,60
Pukovac		265+833-265+862	platform			
BRESTOVAC	next to railway line - right between the 2nd and 3rd track	265+870-265+897 267+906-267+971	platform	27,00 65,00	0,40 0,40	1,60 1,60
DVESTOAM	next to railway line - left	270+819-270+844	platform	25,00	0,40	1,10
Lipovica	next to railway line - left	270+819-270+844	platform	37,00	0,40	1,10
PEČENJEVCE	between the 2nd and 3rd track	275+522-275+596	platform	74,00	0,40	1,10
Živkovo	next to railway line - right	278+820-278+865	platform	45,00	0,40	1,10
Priboj Leskovački	next to railway line - right	280+440-280+480	platform	40,00	0,40	1,30
VINARCI	next to failway fine - fight	NONE	piationii	40,00	0,40	1,50
VIIVARCI	between the 1st and 2nd track	287+460-287+679	platform	219,00	0,40	1,60
LESKOVAC	between the 2nd and 3rd track	287+507-287+630	platform	123,00	0.40	1.60
ĐORĐEVO	between the 2nd and 31d track	NONE	piationii	123,00	0,40	1,00
	between the 2nd and 3rd track	301+841-301+886	platform	45,00	0,40	1,60
GRDELICA	between the 3rd and 4th track	301+841-301+886	platform	45,00	0,40	1,60
Palojska Rosulja	next to railway line - left	308+614-308+629	platform	15,00	0,40	1,60
PREDEJANE	between the 1st and 2nd track	312+675-312+750	platform	75,00	0,40	1,60
DŽEP	between the 2nd and 3rd track	319+629-319+710	platform	81,00	0,40	1,60
MOMIN KAMEN	next to railway line - left	322+900-322+930	platform	30,00	0,40	1,60
Šelince		NONE		,	, ,	,
VLADIČIN HAN	between the 1st and 2nd track	329+472-329+676	platform	204,00	0,40	1,60
SUVA MORAVA	next to 1st track	334+043-334+095	platform	52,00	0,40	1,60
Lepenički most		NONE				
Stubal		NONE				
PRIBOJ VRANJSKI		NONE				
VRANJSKA BANJA	between the 1st and 2nd track	347+958-348+080	platform	122,00	0,40	1,60
VRANJE	between the 1st and 2nd track	354+080-354+260	platform	180,00	0,40	1,60
VIXANJE	between the 2nd and 3rd track	354+125-354+242	platform	117,00	0,40	1,60
Neradovac		NONE	,		,	
RISTOVAC	between the 1st and 2nd track	365+666-365+768	platform	102,00	0,40	1,60
	between the 2nd and 3rd track	365+666-365+768	platform	102,00	0,40	1,60
BUJANOVAC	between the 1st and 2nd track	373+665-373+720	platform	55,00	0,40	1,60
Letovica		NONE				
BUKAREVAC		NONE				
PREŠEVO	between the 1st and 2nd track	392+256-392+357	platform	101,00	0,40	1,60
	103 (Belgrade Center) - Rako			00100	0.7-	
	next to 2nd track - right	8+460-8+786	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00	0,55	6,10
TATINICA	between the 5th and 6th track	8+545-8+865	platform	320,00	0,55	6,20
JAJINCI	h-4	NONE	-1.46	07.00	0.40	1 (0
BELO POTOK	between the 2nd and 3rd track	16+240-16+337	platform	97,00	0,40	1,60
7 '	between the 3rd and 4th track	16+240-16+351	platform	111,00	0,40	1,60
Zuce staj.	next to railway line - right	20+305-20+363	platform	58,00	0,40	1,60
ZUCE	between the 1st and 2nd track	21+180-21+287	platform	107,00	0,40	1,60
VRČIN	between the 1st and 2nd track	24+824-24+932	platform	108,00	0,40	1,60
Vacamari	between the 2nd and 3rd track	24+824-24+934	platform	110,00	0,40	1,60
Kasapovac LIPE	next to railway line - left between the 1st and 2nd track	27+840-27+938	platform	98,00	0,40	1,60
MALA IVANČA	next to 1st track	31+208-31+316 36+858-36+925	platform platform	108,00 67,00	0,40	1,60 1,60
IVIALA I V ANCA	HEAT TO 1ST TEACK	JU+0J0-JU+94J	piauoilli	07,00	0,40	1,00



		km position of the	1	T	Dimension	
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Widtl
per vice permit	200000	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the 1st and 2nd track	36+863-36+925	platform	62,00	0,40	1,60
Brestovi	next to railway line - left	39+208-39+305	platform	97,00	0,40	1,60
	between the 1st and 2nd track	41+250-41+356	platform	106,00	0,40	1,60
MALI POŽAREVAC	between the 2nd and 3rd track	41+250-41+358	platform	108,00	0,40	1,60
Dražanj-Šepšin	next to railway line - right	43+114-43+219	platform	105,00	0,40	1,60
	between the 1st and 2nd track	47+730-47+839	platform	109,00	0,40	1,60
UMČARI	between the 2nd and 3rd track	47+730-47+837	platform	107,00	0,40	1,60
Živkovac	next to railway line - left	52+290-52+340	platform	50,00	0,40	1,60
VODANJ	between the 2nd and 3rd track	55+130-55+229	platform	99,00	0,40	1,60
KOLARI	between the 1st and 2nd track	60+558-60+656	platform	98,00	0,40	1,60
Ralja Smederevska	next to railway line - left	66+573-66+605	platform	32,00	0,40	1,60
Kaija Sinedere vska	between the 1st and 2nd track	69+030-69+175	platform	145,00	0,40	1,90
	between the 2nd and 3rd track	69+030-69+175	platform	145,00	0,40	1,90
MALA KRSNA	between the 3rd and 4th track	69+042-69+184	platform	142,00	0,40	1,90
	between the 3rd and 4rd track	69+080-69+230	platform	150,00	0,40	1,90
Skobalj	next to railway line - left	71+981-72+015	platform	34,00	0,40	1,60
Osipaonica staj.	next to railway line - left	74+749-74+784	platform	35,00	0,40	1,60
Osipaoliica staj.	between the 1st and 2nd track	76+168-76+231	platform	63,00	0,40	1,60
OSIPAONICA	between the 1st and 2nd track	76+177-76+229	platform			1,60
T			_ r ··· ·	52,00	0,40	1,00
Lugavčina	next to railway line - right	77+867-77+904	platform	37,00	0,40	1,30
Saraorci	1 2 1 12 14 1	NONE	1 .6	102.00	0.40	1.66
LOZOVIK-SARAORCI	between the 2nd and 3rd track	82+710-82+812	platform	102,00	0,40	1,60
Miloševac	next to railway line - left	85+500-85+602	platform	102,00	0,40	1,60
KRNJEVO-TRNOVČE	between the 2nd and 3rd track	90+248-90+348	platform	100,00	0,40	1,60
	between the plateau in front of					
VELIKO ORAŠJE	the station building and 2 nd	94+626,50-94+658,50	platform	32,00	0,40	1,6
VELIKO OKASJE	track					
	between the 2nd and 3rd track	94+586,50-94+689,50	platform	103,00	0,40	1,6
	between the 1st and 2nd track	90+350-90+400	platform	50,00	0,40	1,60
VELIKA PLANA	between the 2nd and 3rd track	90+289-90+430	platform	141,00	0,40	1,60
VELIKA I LANA	between the 3rd and 4th track	90+370-90+510	platform	140,00	0,40	1,60
	between the 4th and 5th track	90+360-90+464	platform	104,00	0,40	1,60
	104 (Jagodina) – Open Lin	e Junction Ćuprija – Ćup	rija – Paraćin			
ĆUPRIJA	between the 1st and 2nd track	0+516-0+641	platform	125,00	0,20	1,60
CUPRIJA	between the 2nd and 3rd track	0+516-0+641	platform	125,00	0,30	1,60
DADAĆDI.	between the 3rd and 4th track	155+081-155+184	platform	103,00	0,35	1,60
PARAĆIN	between the 4th and 5th track		platform	101,00	0,20	1,90
10:	5 (Belgrade Center) - Stara Pazo				- , -	
	next to 1st track	34+015-35+235 л.н.	platform	220,00	0,55	3,00
STARA PAZOVA	between the 5th and 6th track	35+015-35+265 л.н.	platform	250,00	0,55	6,10
	next to 1st track	42+577 - 42+977	platform	400,00	0,55	4,10
INĐIJA	between the 4th and 5th track	42+577 - 42+977	platform	400,00	0,55	7,55
BEŠKA	next to 1st track	53+922 - 54+142	platform	220,00	0,55	4,00
DESINA			•			4,00
	next to 4 th track	53+922 - 54+142	platform	220,00	0,55	
SREMSKI KARLOVCI	between the 1st and 2nd track	65+759 - 65+979	platform	220,00	0,55	4,00
	between the 1st and 2nd track	65+759 - 65+979	platform	220,00	0,55	4,00
PETROVARADIN	between the 1st and 2nd track	70+603 - 70+823	platform	220,00	0,55	6,10
	between the 5 th and 6 th track	70+708 - 70+928	platform	220,00	0,55	6,10
	between the 10th and 11th	77+077-77+214	platform	137,00	0,55	6,10
	track		_		, í	-,-,
	between the 7th and 8th track	76+794-76+919	platform	125,00	0,55	
NOVI SAD	next to 1st track	76+809-77+214	platform	405,00	0,55	8,60
	between the 2nd and 3rd track	76+819-77+247	platform	428,00	0,55	8,60
	between the 4th and 5th track	76+837-78+247	platform	410,00	0,55	8,60
	next to the 6th track	76+892-77+177	platform	285,00	0,55	6,00
RUMENKA		NONE	1	- ,	. ,	
KISAČ	next to the 1st track left	90+222-90+442	platform	220,00	0,55	4,00
KIDAC	next to the 4th track right	90+222-90+442	platform	220,00	0,55	4,00
						4,00
Stepanovićevo	next to the 1st track right	97+227-97+447	platform	220,00	0,55	4,00
=	next to the 4th track left	97+227-97+447	platform	220,00	0,55	4,00
7MAIDUO		100 - 401 - 100 - 701	•	220.00		
ZMAJEVO	next to the 1st track right	102+481-102+701	platform	220,00	0,55	4,00



		km position of the	DL (C / 1	I	Dimensions	3
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width
		of platform	Surrace	(m)	(m)	(m)
1	2	3	4	5	6	7
	next to the 4th track left	102+664-102+884	platform	220,00	0,55	4,00
	next to the 1st track right	113+500-113+720	platform	220,00	0,55	4,00
VRBAS NOVA	between the 1st and 2nd track	113+410-113+810	platform	400,00	0,55	6,60
	between the 5th and 6th track	113+410-113+810	platform	400,00	0,55	6,60
LOVĆENAC – MALI IĐOŠ	next to the 1st track right	129+386-129+606	platform	220,00	0,55	4,00
	next to the 4th track left	129+386-129+606	platform	220,00	0,55	4,00
BAČKA TOPOLA	next to the 1st track left	143+406-143+806	platform	400,00	0,55	4,00
	next to the 4th track right	143+406-143+806	platform	400,00	0,55	4,00
ŽEDNIK	next to the 1st track right	156+965-157+185	platform	220,00	0,55	4,00
	next to the 4th track left	156+965-157+185	platform	220,00	0,55	4,00
NAUMOVIĆEVO	next to the 1st track left	166+393-166+613	platform	220,00	0,55	4,00
	next to the 4th track right	166+393-166+613	platform	220,00	0,55	4,00
	next to the 1st track left	176+606-176+850	platform	244,00	0,55	3,00
	between the 2nd and 3rd track	176+450-176+850	platform	400,00	0,55	6,10
Subotica	between the 4th and 5th track	176+550-176+820	platform	270,00	0,55	6,10
	between the 6th and 7th track	176+605-176+826	platform	221,00	0,55	6,10
		GRAD - state border –(D	1			
	next to 1st track	243+410-243+763	platform	353,00	0,40	5,80
	between the 2nd and 3rd track	243+410-243+813	platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
1415	between 1b and 1st track	243+410-243+771	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
Palilulska rampa	next to railway line - left	1+669-1+769	platform	100,00	0,40	1,60
- T. D. I.;	next to railway line - left	1+809-1+875	platform	66,00	0,40	1,60
Vojna Bolnica		NONE 5 122 5 502	1.6	00.00	0.40	1.60
ĆELE KULA	between the 2nd and 3rd track	5+422-5+502	platform	80,00	0,40	1,60
EI NIŠ		NONE	,			
NIŠKA BANJA	between the 2nd and 3rd track	10+450-10+558	platform	108,00	0,40	1,60
Prosek	next to railway line - right	14+712-14+731	platform	19,00	0,40	1,60
	next to railway line - right	14+740-14+770	platform	30,00	0,40	1,60
SIĆEVO		NONE				
OSTROVICA	between the 1st and 2nd track	22+475-22+529	platform	54,00	0,40	1,60
Majdan Ostrovica		NONE				
Radov Dol	next to railway line - left	29+494-29+520	platform	26,00	0,40	1,60
DOLAC	between the 2nd and 3rd track	31+640-31+739	platform	79,00	0,40	1,60
Crveni Breg	next to railway line - left	34+262-34+292	platform	30,00	0,40	1,60
CRVENA REKA	between the 2nd and 3rd track	36+393-36+451	platform	58,00	0,40	1,60
Belanovac	next to railway line - left	39+691-39+761	platform	70,00	0,40	1,60
BELA PALANKA	between the 2nd and 3rd track	44+907-44+977	platform	70,00	0,40	1,60
Crkvica	Services the 2nd and 3rd track	NONE	pianomi	70,00	0,10	1,00
ČIFLIK		NONE				
Sinjac	+	NONE				
Đurđevo polje	+	NONE				
	+					
Crvenčevo	-	NONE				
STANIČENJE	 	NONE				
Sopot	1, , , , , , , , , , , , , , , , , , ,	NONE	1 ,		1 0 1	
PIROT	between the 1st and 2nd track	72+901-72+989	platform	87,00	0,40	1,60
	between the 2nd and 3rd track	72+868-73+021	platform	153,00	0,40	1,60
Božurat		NONE				
Veliki Jovanovac		NONE				
SUKOVO		NONE				
	next to railway line - left	90+465-90+471	platform	6,00	0,40	1,60
	•		platform	6,00	0,40	1,60
Činiglavci	next to railway line - left	90+485-90+491	F			
	•	90+485-90+491 NONE	F			
Činiglavci Srećkovac	next to railway line - left next to 14th track		platform	141,00	0,40	2,50
Činiglavci Srećkovac DIMITROVGRAD	next to railway line - left next to 14th track between the 1st and 2nd track	NONE 97+126-97+267 97+316-97+717	platform platform	401,00	0,40	2,50 3,20
Činiglavci Srećkovac DIMITROVGRAD	next to railway line - left next to 14th track	NONE 97+126-97+267 97+316-97+717	platform platform	401,00		
Činiglavci Srećkovac DIMITROVGRAD	next to railway line - left next to 14th track between the 1st and 2nd track	NONE 97+126-97+267 97+316-97+717	platform platform	401,00		
Činiglavci Srećkovac DIMITROVGRAD	next to railway line - left next to 14th track between the 1st and 2nd track 7 Belgrade Center - Pančevo Mair next to 3rd track	NONE 97+126-97+267 97+316-97+717 n St Vršac - state borde 0+120-0+00-0+300	platform platform r - (Stamora Moray	401,00 vita) 420,00	0,40	3,20
Činiglavci Srećkovac DIMITROVGRAD	next to railway line - left next to 14th track between the 1st and 2nd track Belgrade Center- Pančevo Mair next to 3rd track between the 4th and 5th track	NONE 97+126-97+267 97+316-97+717 n St Vršac - state borde 0+120-0+00-0+300 0+155-0+00-0+300	platform platform r - (Stamora Morav platform platform	401,00 vita) 420,00 455,00	0,40 0,55 0,55	3,20 10,00 10,00
Činiglavci Srećkovac DIMITROVGRAD	next to railway line - left next to 14th track between the 1st and 2nd track 7 Belgrade Center - Pančevo Mair next to 3rd track	NONE 97+126-97+267 97+316-97+717 n St Vršac - state borde 0+120-0+00-0+300	platform platform r - (Stamora Morav platform	401,00 vita) 420,00	0,40	3,20



Service point	Location	km position of the beginning and the end	Platform/arranged	Length	Dimensions Height	Width
1	2	of platform	surface	(m) 5	(m)	(m) 7
1	between the tracks	3	4	3	6	1
Karađorđev park	(next to left Banat track)	1+123-1+215	platform	92,00	0,55	7,00
randordev park	between the tracks (next to right Banat track)	1+222-1+314	platform	92,00	0,55	7,00
	between the tracks	2+754,13-2+829,13 (chainage along the left) 2+850,52-2+925,52 (chainage along the right)	central platform	75,00	0,95	18,60
	between the tracks (next to right Banat track)	2+785,52-2+850,52	lateral platform towards the Center	65,00	0,95	3,50
Vukov spomenik	between the tracks (next to right Banat track)	2+925,52-3+010,52	lateral platform towards the bridge	85,00	0,95	3,50
	between the tracks (next to left Banat track)	2+689,13-2+754,13	lateral platform towards the Center	65,00	0,95	3,50
	between the tracks (next to left Banat track)	2+829,13-2+914,13	lateral platform towards the bridge	85,00	0,95	3,50
	next to 1st track	4+590-4+741	platform	151,00	0,90	4,94
PANČEVAČKI MOST	next to 2nd track	4+694-4+845	platform	151,00	0,90	4,94
THINE THEM MOST	next to railway line - right	10+500-10+600	Danube platform	100,00	0,35	1,60
Krnjača most	Between the left and right track	7+003,50-7+223,50	platform	220,00	0,60	7,00
WDMIA ČA	next to 4th track	8+165,06-8+385,06	platform	220,00	0,55	3,00
KRNJAČA	next to 1st track	8+182,24-8+402,24	platform	220,00	0,55	3,00
Sebeš	next to left Banat track	9+975,05-10+085,05	platform	110,00	0,60	3,10
Sedes	next to right Banat track	9+975,05-10+085,05	platform	110,00	0,60	3,10
OVČA	next to 1st track	12+537,60-12+757,60	platform	220,00	0,55	4,00
	between the 4th and 5th track	12+537,60-12+757,60	platform	220,00	0,55	6,10
PANČEVO MAIN	between the 1st and 2nd track	15+913-16+033	platform	120,00	0,40	1,60
STATION	between the 1st and 2nd track	16+090-16+210 15+913-16+210	platform platform	120,00 297,00	0,40 0,40	1,60 1,60
STATION	between the 3rd and 4th track	15+987-16+137	platform	150,00	0,40	1,60
	next to 1st track	18+131-18+223	station plateau	92,00	0,40	1,60
PANČEVO VAROŠ	between the 1st and 2nd track	18+105-18+345	platform	240,00	0,40	1,60
	between the 2nd and 3rd track	18+100-18+364	platform	264,00	0,40	1,60
BANATSKO NOVO SELO	between the 2nd and 3rd track	33+981-34+035	arranged surface	54,00	0,30	0,50
VLADIMIROVAC	between the 1st and 2nd track	45+806-45+906	arranged surface	100,00	0,00	1,30
VLADIVIIKO VAC	between the 2nd and 3rd track	45+806-45+906	arranged surface	100,00	0,00	1,30
ALIBUNAR	between the 1st and 2nd track	53+503-53+603	arranged surface	100,00	0,00	1,30
	between the 2nd and 3rd track	53+503-53+603	arranged surface	100,00	0,00	1,30
BANATSKI KARLOVAC	between the 2nd and 3rd track	NONE				
Nikolinci ULJMA	between the 2nd and 3rd track	NONE				
Vlajkovac	between the 2nd and 31d track	NONE				
•	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
VRŠAC	between the 2nd and 3rd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
1	08 (Belgrade Center) - Resnik -			•	l c 1	
DEGNAZ	next to 1st track	14+080-14+240	arranged surface	160,00	0,55	4,00
RESNIK	between the 1st and 2nd track	14+080-14+240	platform	160,00	0,35	1,55
BELA REKA	between the 3rd and 4th track between the 1st and 2nd track	13+943-14+238 7+538-7+648	platform platform	295,00 110,00	0,55 0,35	6,20 1,60
Nenadovac	next to railway line - left	12+077-12+127	platform	50,00	0,35	1,60
BARAJEVO	between the 2nd and 3rd track	15+654-15+764	platform	110,00	0,35	1,60
Barajevo Centar	next to railway line - left	17+895-18+003	platform	108,00	0,35	1,60
VELIKI BORAK	between the 1st and 2nd track	23+039-23+151	platform	112,00	0,35	1,60
Leskovac Kolubarski	next to railway line - right	27+720-27+770	platform	50,00	0,35	1,60
STEPOJEVAC	between the 2nd and 3rd track	30+572-30+682	platform	110,00	0,35	1,60
VREOCI	between the 2nd and 3rd track	37+150-37+300	platform	150,00	0,35	1,60
,12301	between the 3rd and 4th track	37+150-37+300	platform	150,00	0,35	1,60



	ı	1 '.' C.1	1		· ·	
Service point	Location	km position of the beginning and the end	Platform/arranged		Dimensions	S Width
Service point	Location	of platform	surface	Length (m)	Height (m)	(m)
1	2.	3	4	5	6	7
1	between the 1st and 2nd track	45+311-45+462	platform	151,00	0,35	1,60
LAZAREVAC	between the 2nd and 3rd track	45+311-45+462	platform	151,00	0,35	1,60
	between the 1st and 2nd track	52+547-52+697	platform	150,00	0,40	1,60
LAJKOVAC	between the 2nd and 3rd track	52+527-52+697	platform	170,00	0,35	1,60
	between the 1st and 2nd track	58+899-59+052	platform	153,00	0,35	1,60
SLOVAC	between the 2nd and 3rd track	58+899-59+052	platform	153,00	0,35	1,60
Mlađevo	next to railway line - right	63+958-64+035	platform	77,00	0,35	1,60
	between the 1st and 2nd track	67+043-67+213	platform	170,00	0,35	1,60
DIVCI	between the 2nd and 3rd track	67+043-67+213	platform	170,00	0,35	1,60
Lukavac Kolubarski	next to railway line - right	69+165-69+265	platform	100,00	0,35	1,60
Iverak	next to railway line - right	72+725-72+825	platform	100,00	0,35	1,60
VALIEVO	next to 1st track	77+550-77+851	platform	301,00	0,35	5,4
VALJEVO	between the 2nd and 3rd track	77+562-77+863	platform	301,00	0,35	7,55
VALJEVSKI GRADAC	next to railway line - right	84+560-84+610	platform	50,00	0,35	1,60
Leskovice	next to railway line - left	91+605-91+655	platform	50,00	0,35	1,60
LASTRA	between the 2nd and 3rd track	93+985-94+131	platform	146,00	0,35	1,60
SAMARI	between the 2nd and 3rd track	103+118-103+168	platform	50,00	0,40	1,60
Drenovački Kik	next to railway line - right	107+700-107+750	platform	50,00	0,40	1,60
RAŽANA	between the 3rd and 4th track	111+284-111+430	platform	146,00	0,35	1,60
KOSJERIĆ	between the 3rd and 4th track	118+748-118+948	platform	200,00	0,40	1,60
	between the 4th and 5th track	118+748-118+948	platform	200,00	0,40	1,60
Tubići	next to railway line - left	123+446-123+496	platform	50,00	0,35	1,60
KALENIĆI	between the 3rd and 4th track	129+772-129+918	platform	146,00	0,35	1,60
Otanj	next to railway line - right	133+600-133+710	platform	110,00	0,40	1,50
Glumač	next to railway line - right	135+807-135+863	platform	56,00	0,40	1,60
POŽEGA	next to 1st track	140+720-140+975	platform	255,00	0,45	10,00
	between the 2nd and 3rd track	146+675-140+984	platform	309,00	0,45	6,20
Rasna	next to railway line - right	145+618-145+650	platform	32,00	0,40	1,00
UZIĆI	between the 1st and 2nd track	149+125-149+255	platform	129,00	0,40	1,60
	between the 2nd and 3rd track	149+255-149+389	platform	134,00	0,40	1,60
Zlakusa	next to railway line - right	151+536-151+566	platform	30,00	0,40	1,60
Bukovička Rampa	next to railway line - right	154+141-154+161	platform	20,00	0,40	1,60
SEVOJNO	between the 1st and 2nd track	156+882-157+082	platform	200,00	0,40	1,60
UŽICE FREIGHT STATION	between the 2nd and 3rd track	161+795-161+995	platform	200,00	0,40	1,60
	between the 1st and 2nd track next to 1st track	161+813-161+953 163+645-163+900	platform platform	140,00 255,00	0,40 0,40	1,60 3,00
UŽICE	between the 2nd and 3rd track	163+626-163+881	platform	255,00	0,60	5,10
STAPARI	between the 1st and 2nd track	170+590-170+710	platform	120,00	0,40	1,60
STALAKI	next to railway line - left	173+412-173+425	platform	13	0,40	1,60
Ristanovića Polje	next to railway line - right	173+426-173+464	platform	38	0,40	1,60
Tripkova	next to railway line - right	176+045-176+095	platform	50	0,40	1,60
SUŠICA	between the 2nd and 3rd track	178+251-178+371	platform	120,00	0,40	1,60
5551611	next to 1st track	185+181-185+291	platform	110,00	0,40	5,50
BRANEŠCI	between the 1st and 2nd track	185+181-185+291	platform	110,00	0,40	1,60
	between the 2nd and 3rd track	185+181-185+291	platform	110,00	0,40	1,60
ZLATIBOR	between the 2nd and 3rd track	193+234-193+404	platform	170,00	0,40	1,60
Ribnica Zlatiborska	next to railway line - left	200+350-200+400	platform	50,00	0,40	1,60
JABLANICA	between the 3rd and 4th track	204-405-204+550	platform	145,00	0,40	1,60
Goleš	next to railway line - right	211+590-211+616	platform	26,00	0,40	1,00
ŠTRPCI	between the 2nd and 3rd track	214-755-214-900	platform	145,00	0,40	1,60
Rača	next to railway line - right	219+515-219+536	platform	21,00	0,40	1,00
PRIBOJ	between the 2nd and 3rd track	225+227-225+490	platform	263,00	0,50	5,10
	between the 6th and 7th track	225+137-225+237	platform	100,00	0,50	3,00
Poljice	next to railway line - right	228+110-228+190	platform	80,00	0,40	1,60
Pribojska Banja	next to railway line - right	232+867-232+899	platform	32,00	0,40	1,00
BISTRICA NA LIMU	between the 2nd and 3rd track	241+208-241+352	platform	144,00	0,40	1,60
Džurovo	next to railway line - right	246+300-246+328	platform	28,00	0,40	1,00
PRIJEPOLJE	next to 1st track	252+396-252+705	platform	309,00	0,40	4,60
	between the 2nd and 3rd track	252+396-252+705	platform	309,00	0,40	7,00
PRIJEPOLJE FREIGHT	between the 2nd and 3rd track	255+789-255+982	platform	187,00	0,35	1,60
STATION	between the 3rd and 4th track	255+789-255+982	platform	187,00	0,35	1,60
Velika Župa	next to railway line - right	259+605-259+624	platform	19,00	0,40	1,00



	1		1			
g · · · ·	T	km position of the	Platform/arranged		Dimensions	
Service point	Location	beginning and the end	surface	Length	Height	Width
1	2	of platform	4	(m)	(m)	(m) 7
l HÖLGE	2	3	4	5	6	
LUČICE	between the 2nd and 3rd track	264+581-264+714	platform	133,00	0,35	1,60
BRODAREVO	between the 2nd and 3rd track	273+255-273+404	platform	149,00	0,30	1,60
VRBNICA	between the 1st and 2nd track	285+205-285+255	platform	50,00	0,30	1,60
1007	between the 2nd and 3rd track	285+112-285+256	platform	144,00	0,30	1,60
109 La	povo - Kraljevo - Lešak - Kosovo		· · · · · · · · · · · · · · · · · · ·		0.05	1.60
I A DOMO	between the 2nd and 3rd track	109+560-109+680	platform	120,00	0,35	1,60
LAPOVO	between the 3rd and 4th track	109+560-109+680	platform	120,00	0,35	1,60
D. Mo čpri	next to 1st track	109+460-109+510	platform	50,00	0,35	1,60
BATOČINA	between the 1st and 2nd track	3+374,70-3+421,90	platform	47,20	0,12	1,30
Gradac	left side	8+243,40-8+292,90	platform	49,50	0,30	1,05
BADNJEVAC	between the 2nd and 3rd track	12+264,50-12+311,50	platform	47,00	0,14	1,80
Resnik Kragujevački		NONE	1.6	46.00	0.00	1.10
Milatovac	right side	18+206,90-18+253,70	platform	46,80	0,33	1,10
Cvetojevac	right side	20+381-422,20	platform	41,20	0,25	1,20
JOVANOVAC	between the 2nd and 3rd track	22+308-22+352	platform	44,00	0,22	1,75
KRAGUJEVAC	between the 1st and 2nd track	28+726-28+918,70	platform	192,70	0,24	1,20
	between the 2nd and 3rd track	28+752-28+907	platform	155,00	0,24	1,80
Zavod	right side	31+280,50-31+288,25	platform	7,75	0,10	0,50
GROŠNICA	between the 1st and 2nd track	34+062,80-34+104,30	platform	41,50	0,22	1,50
DRAGOBRAĆA	between the 1st and 2nd track	39+529-39+565	platform	36,00	0,20	1,20
Vučkovica	right side	44+513-44+538	platform	25,00	0,30	1,20
KNIĆ	between the 1st and 2nd track	47+560-47+607	platform	47,00	0,30	1,40
GRUŽA	between the 1st and 2nd track	53+458-53+505,5	platform	47,50	0,22	1,40
GUBEREVAC	between the 1st and 2nd track	60+567-60+614	platform	47,00	0,20	1,55
Tomića Brdo	right side	64+795-64+822,50	platform	27,50	0,35	1,00
VITKOVAC	between the 1st and 2nd track	66+309-66+353	platform	44,00	0,25	1,25
Milavčići	left side	70+141,80-70+172,80	platform	31,00	0,35	1,40
VITANOVAC	between the 1st and 2nd track	73+904,30-73+948,70	platform	44,40	0,22	1,40
Šumarice	left side	79+111-79+128,4	platform	17,40	0,25	0,50
Sirča	right side	82+006-82+069	platform	63,00	0,35	1,90
KRALJEVO	between the 1st and 2nd track	84+649-84+733	platform	84,00	0,33	1,60
	between the 2nd and 3rd track	84+649-84+748	platform	99,00	0,33	1,60
MATARUŠKA BANJA	between the 2nd and 3rd track	93+895-93+940	platform	45,00	0.20	1,80
Progorelica	left side	97+352-97+386	platform	34,00	0,25	1,40
BOGUTOVAČKA BANJA	between the 1st and 2nd track	100+868-100+919	platform	51,00	0,22	1,80
DOBRE STRANE		NONE				
POLUMIR	between the 1st and 2nd track	118+291-118+344	platform	53,00	0,26	1,50
Pusto Polje	left side	123+555-123+589	platform	34,00	0,25	1,00
UŠĆE	between the 1st and 2nd track	127+223-127+281	platform	58,00	0,34	1,50
Lozno	right side	132+832-132+866	platform	34,00	0,22	0,50
JOŠANIČKA BANJA	between the 1st and 2nd track	136+102-136+152	platform	50,00	0,25	1,45
Piskanja	left side	138+842-138+884	platform	42,00	0,21	1,00
BRVENIK	between the 1st and 2nd track	143+481-143+528	platform	47,00	0,32	1,50
Rvati	left side	148+258-148+304	platform	46,00	0,22	1,00
RAŠKA	between the 1st and 2nd track	152+236-152+353	platform	117,00	0,32	1,80
Kaznovići	left side	157+700-157+740	platform	40,00	0,23	1,00
RUDNICA	between the 1st and 2nd track	161+970-162+022	platform	48,00	0,25	1,55
Donje Jarinje	Secretaria 15t and 2nd track	NONE	practoriii	10,00	5,25	1,55
Jerina	next to railway line - left	168+865-168+935	arranged surface	70,00	0,20	1,60
	between the 1st and 2nd track	172+294-172+394	platform	100,00	0,35	1,60
LEŠAK	between the 2nd and 3rd track	172+294-172+394	platform	100,00	0,35	1,60
Dren	between the 2nd and 31d track	NONE	piauoiiii	100,00	0,55	1,00
LEPOSAVIĆ	between the 1st and 2nd track	182+675-182+775	platform	100,00	0,35	1,60
Pridvorica	between the 1st and 2nd track	NONE	piauoiiii	100,00	0,55	1,00
Sočanica Sočanica	next to railway line - left	190+000-190+040	platform	40,00	0,35	1,00
IBARSKA SLATINA	neat to failway fille - left	NONE	piatioilli	40,00	0,33	1,00
Plandište						
		NONE				
BANJSKA	hatryaan the 1-t en 10 1.	NONE	omon == 1 C	60.00	0.25	1.00
Valač	between the 1st and 2nd track	208+170-208+230	arranged surface	60,00	0,35	1,00
ZVEČAN	next to 1st track	210+900-211+000	platform	100,00	0,35	1,60
Kosovska Mitrovica Sever	next to railway line - left	213+390-213+440	platform	50,00	0,35	1,60
	110 Subotica - Bo	gojevo - state border - (E1	dut)			
BOGOJEVO		NONE				



g · · · ·	T. d'	km position of the	Platform/arranged		Dimensions	
Service point	Location	beginning and the end of platform	surface	Length (m)	Height (m)	Width (m)
1	2	3	4	5	6	7
SONTA	_	NONE			-	
	between the 1st and 2nd track	58+619-58+649	platform	30,00	0,30	1,55
PRIGREVICA	between the 2nd and 3rd track	58+619-58+649	platform	30,00	0,30	1,57
BUKOVAČKI SALAŠI		NONE				
	between the 1st and 2nd track	73+417-73+477	platform	60,00	0,31	1,61
	between the 1st and 2nd track	73+584-73+612	arranged surface	28,00	0,05	1,50
SOMBOR	between the 1st and 2nd track	73+673-73+823	arranged surface	150,00	0,05	1,50
SOMBOR	between the 2nd and 3rd track	73+417-73+477	platform	60,00	0,38	1,61
	between the 2nd and 3rd track	73+584-73+612	arranged surface	28,00	0,05	1,50
,	between the 3rd and 4th track	73+584-73+701	arranged surface	117,00	0,05	1,50
SVETOZAR MILETIĆ	between the 2nd and 3rd track	83+340-83+397	platform	56,70	0,30	1,68
ALEKSA ŠANTIĆ	between the 2nd and 3rd track	97+500-97-556	platform	55,61	0,24	1,90
BAJMOK	between the 2nd and 3rd track	105+138-105+193	platform	55,00	0,23	1,90
Skenderevo		NONE	1.0	70.00	0.20	1.00
TAVANKUT	between the 2nd and 3rd track	115+350-115+400	platform	50,00	0,30	1,80
Ljutovo		NONE				
ŠEBEŠIĆ	next to rollway line 1sft	NONE	platform	<i>4</i> 1.00	0.25	1 60
Subotica predgrađe	next to railway line - left between the 1st and 2nd track	128+229-128+270 176+360-176+414	1	41,00	0,25	1,60 1,70
	between the 1st and 2nd track	176+360-176+414	arranged surface platform	54,00 73,00	0,05	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,25	1,70
SUBUTICA	between the 1st and 2nd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
		ng Yard "A" – Ostružnica		230,00	0,03	1,70
BELGRADE	111 Beigraue Marshann					
MARSHALLING YARD A		NONE				
OSTRUŽNICA		NONE				
SURČIN		NONE				
	between the 1st and 2nd track	20+510 - 20+768	platform	258,00	0,35	1,90
	between the 2nd and 3rd track	20+543 - 20+722	platform	179,00	0,35	1,90
BATAJNICA	between the 3rd and 4th track	20+598 - 20+722	platform	124,00	0,35	1,60
	between the 4th and 5th track	20+598 - 20+722	platform	124,00	0,35	1,60
	112 Belgrade Mar	shalling Yard "B" - Ostru	ižnica			
BELGRADE		NONE				
MARSHALLING YARD B		NONE				
OSTRUŽNICA		NONE				
	de Marshalling Yard,,A" - Open	line junction "B" - Open	line junction "K/K	1" - Resnil	ζ.	
BELGRADE		NONE				
MARSHALLING YARD A						
D-001-777	next to 1st track	14+080-14+240	arranged surface	160,00	0,55	4,00
RESNIK	between the 1st and 2nd track	14+080-14+240	platform	160,00	0,35	1,55
	between the 3rd and 4th track	13+943-14+238	platform	295,00	0,55	6,20
OSTRUŽNICA	114 Ostružnica - Open line ju	inction "B" - (Open line ji NONE	unction "K/K1")			
	 ade Marshalling Yard,,B" - Ope		n line junction 4"	- (Rospile)		
BELGRADE	ade Marshaning Fard,, b - Ope	n nne junction "K - Opei	ii line junction "A	- (Kesilik)		
MARSHALLING YARD B		NONE				
MINISTRIEEN O TIME B	116 (Belgrade Marshalling Ya	rdB") - Onen line iunctio	n "R" - Rakovica			
	next to 2nd track - right	8+460-8+786	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00	0,55	6,10
	between the 5th and 6th track	8+545-8+865	platform	320,00	0,55	6,20
	117 Belgrade Marshalling Ya			,	, ,,,,,	-,
BELGRADE						
MARSHALLING YARD A		NONE				
	next to 2nd track - right	8+460-8+786	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00	0,55	6,10
	between the 5th and 6th track	8+545-8+865	platform	320,00	0,55	6,20
	118 Belgrade Marshalling Yar	d,,B" - Open line junction	,,T" - (Rakovica)			
BELGRADE MARSHALLING YARD B		NONE				
	one of Open line junction "K/K1		") - Open line junct	tion "K" -	Open line	junction
		K1" - (Jajinci)				



		km position of the	F1 . C / 1	I	Dimension	1S
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width
-		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the tracks	1+123-1+215	platform	92,00	0,55	7,00
Karađorđev park	(next to left Banat track)	11123 11213	platform	72,00	0,55	7,00
1	between the tracks	1+222-1+314	platform	92,00	0,55	7,00
	(next to right Banat track)	ndija Calubinai				· ·
	between the 1st and 2nd track	nđija - Golubinci 42+840-42+970	platform	130,00	0,40	1,60
INĐIJA	between the 1st and 2nd track	42+783-42+928	platform	145,00	0,40	1,60
	between the 2nd and 3rd track	45+767,00-45+914,00	platform	147,00	0,35	1,60
GOLUBINCI	between the 3rd and 4th track	45+767,00-45+914,00	platform	147,00	0,35	1,60
	122 Novi Sad- Novi Sad Mars			117,00	0,55	1,00
	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00
	between the 11th and 10th track	77+822-77+950	platform	128,00	0,40	3,72
	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20
NOVI SAD	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90
	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75
	between the 12thand 1st track	78+104-78+250	platform	146,00	0,40	8,90
	between the 14 th and 13 th track	78+104-78+249	platform	145,00	0,40	6,46
NOVI SAD		NONE		<u> </u>		
MARSHALLING YARD		NONE				
123 by-pass track	of Mala Krsna station: (Kolari) -			[o28 - (Osi	paonica)	
-	124 Open line junction Lapovo	Varoš - Lapovo Marshall	ing Yard - Lapovo			
Lapovo Varoš	next to right track	106+250-106+310	platform	60,00	0,35	1,60
	next to left track	106+250-106+310	platform	60,00	0,35	1,60
LAPOVO MARSHALLING		NONE				
YARD						
	between the 2nd and 3rd track	109+560-109+680	platform	120,00	0,35	1,60
LAPOVO	between the 3 rd and 4 th track	109+560-109+680	platform	120,00	0,35	1,60
	next to 1st track	109+460-109+510	platform	50,00	0,35	1,60
		Marshalling Yard - Među				
TRUPALE	between the 2nd and 3rd track	234+893-234+994	platform	101,00	0,40	1,60
	between the 4th and 5th track	234+893-234+994	platform	101,00	0,40	1,60
NIŠ MARSHALLING	next to 1a. track	238+216-238+289	platform	73,00	0,40	2,20
YARD MEĐUROVO		NONE				
MEĐUROVO	126 Cryoni V	NONE rst - Niš Marshalling yard	<u> </u>			
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00	1,60	0,40
NIŠ MARSHALLING	next to 1a. track	238+216-238+289	platform	73,00	0,40	2,20
YARD	next to 1a. track	230 210-230 207	plationii	73,00	0,40	2,20
1140	127 Niš - Open line jun	ction Most - (Niš Marshal	ling Yard)		II.	
	next to 1st track	243+410-243+763	platform	353,00	0,40	5,80
	between the 2nd and 3rd track	243+410-243+813	platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
	between the 1b. and 1st track	243+643-243+763	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
128 Connecting t	rack of Niš station: (Crveni Krst		separation switch	No4 - (Ćel	e Kula)	
	REGIONA	AL RAILWAY LINES				
	201 Subotica - Ho	orgoš - state border - (Rös	zke)			
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
JAVNA SKLADIŠTA	next to railway line - left	2+275-2+385	platform	110,00	0,55	3,00
PALIĆ	next to 2 nd track (right)	7+575-7+685	platform	110,00	0,55	3,00
	next to 4th track	7+575-7+685	platform	110,00	0,55	8,00
Hajdukovo	next to railway line - right	12+002-12+112	platform	110,00	0,55	3,00
BAČKI VINOGRADI	next to 2 nd track (right)	15+360-15+470	platform	110,00	0,55	3,00
HORGOŠ	next to 2 nd track (right)	23+995-24+105	platform	110,00	0,55	4,00
	next to 5th track	23+995-24+105	platform	110,00	0,55	4,00
	202 Pančevo Main St Zrenj			120	0.40	1.00
PANČEVO MAIN	between the 1st and 2nd track	15+913-16+033	platform	120	0,40	1,60
STATION	between the 1st and 2nd track between the 2nd and 3rd track	16+090-16+210 15+913-16+210	platform	120 297	0,40	1,60 1,60
51111011		134413-164710	platform	79/	11 /1(1)	1.60



		km position of the	D1-+f/	I	ns			
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width		
•		of platform	surface	(m)	(m)	(m)		
1	2	3	4	5	6	7		
	between the 3rd and 4th track	15+987-16+137	platform	150	0,40	1,60		
JABUKA	between the 3rd and 4th track	NONE	piatroim	130	0,40	1,00		
KAČAREVO	between the 1st and 2nd track	26+784-26+834	platform	50	1.6	0,35		
	between the 1st and 2nd track		piationii	30	1,0	0,33		
CREPAJA		NONE						
DEBELJAČA		NONE						
KOVAČICA	between the 1st and 2nd track		NONE					
UZDIN		NONE			T	T		
TOMAŠEVAC	between the 1st and 2nd track	61+920-61+970	platform	50	1,6	0,35		
TOWASEVAC	between the 2nd and 3rd track	61+920-61+970	platform	50	1,6	0,35		
ORLOVAT STAJALIŠTE	between the 1st and 2nd track	64+025-64+075	platform	50	1,6	0,35		
LUKIĆEVO		NONE						
ZRENJANIN FABRIKA		NONE						
	next to 1st track	88+705-88+776	platform	71	1,3	0,55		
ZRENJANIN	between the 1st and 2nd track	001703 001770	NONE	/ 1	1,3	0,55		
ZKENJAMIN	between the 2nd and 3rd track							
ELEMID	between the 2nd and 3rd track	NONE	NONE					
ELEMIR		NONE						
MELENCI	between the 2nd and 3rd track		NONE					
KUMANE		NONE						
NOVI BEČEJ		NONE						
BANATSKO MILOŠEVO		NONE						
POLJE		NONE						
	next to 1st track		NONE					
BANATSKO MILOŠEVO	between the 1st and 2nd track		NONE					
Bin with the time of the	between the 2nd and 3rd track		NONE					
Derić	Detween the 2nd and 3rd track	NONE	NONE					
Denc			1.46	126.00	0.10	2 20 4		
KIKINDA	next to 1st track	160+030-160+166	platform	136,00	0,19	3,30-4,		
	between the 1st and 2nd track	160+064-160+190	arranged surface	126,00	0,00	1,50		
BANATSKO VELIKO		NONE						
SELO								
203 Belgrade Donji G	rad (km 7+041) – Belgrade Duna			RAFFIC SU	USPEND	ED		
	204 Topčider Putnička (km 4+)	195) – Open line junction	"G" – (Rakovica)					
	205 Banatsko I	Miloševo - Senta - Subotic	ea					
	next to 1st track		NONE					
BANATSKO MILOŠEVO	between the 1st and 2nd track		NONE					
	between the 2nd and 3rd track		NONE					
Bočar	between the 1st and 2nd track							
Ester	between the 1st and 2nd track	NONE	NONE					
Estei	1	NONE	NONE					
PADEJ	between the 1st and 2nd track		NONE					
	between the 2nd and 3rd track		NONE					
Ostojićevo	between the 1st and 2nd track		NONE					
	between the 1st and 2nd track		NONE					
ČOKA	between the 2nd and 3rd track		NONE		_	_		
	between the 3rd and 4th track		NONE					
SENTA	between the 1st and 2nd track	102+905-102+950	platform	45,00	0,17	1,90		
Gornji Breg	2000 the life life and Zing truck	NONE	Piunoiiii	.5,50	0,17	1,50		
	+							
Bogaraš	-	NONE						
Doline	1	NONE						
OROM		NONE						
Gabrić		NONE						
Bikovo		NONE						
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70		
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60		
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70		
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70		
	between the 3rd and 4th track	176+335-176+573	•		0,05	_		
	between the 3rd and 4th track	1/0+333-1/0+3/3	arranged surface	238,00	0,05	1,70		
		Open line junction 2a - (.			1			
	next to 1st track	18+131-18+223	station plateau	92,00	0,40	1,60		
PANČEVO VAROŠ	between the 1st and 2nd track	18+105-18+345	platform	240,00	0,40	1,60		
	batusaan tha 2nd and 2rd traak	19 : 100 19 : 264	platform	264.00	0.40	1.60		



NOVI SAD

0,40

0,40

0,40

1,60

3,00

3,72

264,00

114,00

128,00

platform

platform

platform

207 Novi Sad- Odžaci - Bogojevo

18+100-18+364

77+836-77+950

77+822-77+950

between the 2nd and 3rd track

next to 11th track

between the 11th and 10th track

		km position of the		Ī	Dimension	ıs		
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width		
•		of platform	surface	(m)	(m)	(m)		
1	2	3	4	5	6	7		
	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20		
	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90		
	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75		
	between the 12 th and 1 st track	78+104-78+250	platform	146,00	0,40	8,90		
	Between 14th and 13th track	78+104-78+249	platform	145,00	0,40	6,46		
Veternik		NONE						
FUTOG		NONE						
PETROVAC - GLOŽAN		NONE						
Bački Maglić		NONE						
GAJDOBRA		NONE						
Parage		NONE						
RATKOVO		NONE						
ODŽACI		NONE						
Odžaci - Kalvarija		NONE						
KARAVUKOVO		NONE						
Bogojevo Selo		NONE						
BOGOJEVO	(NOVI CAD) O I'm 'm A'	NONE PICTURE	.Y O.1	1.74				
	(NOVI SAD) - Open line junction		icevi- Oriovat Staja	iliste				
RIMSKI ŠANČEVI KAĆ		NONE NONE						
KAC Budisava		NONE NONE						
ŠAJKAŠ		NONE						
Vilovo-Gardinovci		NONE						
Lok		NONE						
TITEL		NONE						
Donji Titel		NONE						
Knićanin		NONE						
PERLEZ		NONE						
FARKAŽDIN		NONE						
ORLOVAT		NONE						
ORLOVAT STAJALIŠTE	between the 1st and 2nd track	64+025-64+075	platform	50,00	1,6	0.35		
	arshalling yard separation switch			ction SAJ	LOVO			
NOVI								
SADMARSHALLING		NONE						
YARD								
	210 Orlovat - Ope	n line junction 1a - (Luki	ćevo)					
ORLOVAT		NONE						
211	l Ruma - Šabac - Open line juncti							
	between the 2nd and 3rd track	64+733-64+973	platform	240,00	0,35	1,60		
RUMA	between the 3rd and 4th track	64+733-64+973	platform	240,00	0,35	1,60		
	between the 4th and 5th track	65+821-64+937	platform	116,00	0,35	1,60		
BUĐANOVCI	between the 1st and 2nd track	11+324,00-11+355,00	platform	31,00	0,35	1,60		
Nikinci	next to railway line - left	16+657,70-16+688,70	platform	31,00	0,35	1,60		
PLATIČEVO	between the 1st and 2nd track	21+293,00-21+323,00	platform	30,00	0,35	1,60		
Klenak	next to railway line - right	28+873,15-28+904,15	platform	31,00	0,35	1,60		
ŠABAC	between the 1st and 2nd track	32+684,00-32+738,00	platform	54,00	0,40	1,00		
Majur	next to railway line - left	3+975-4+025	platform	50,00	0,35	1.00		
ŠTITAR	between the 1st and 2nd track	7+713,70-7+735,70	platform	22,00	0,35	1,60		
Dublje Mačvansko	<u> </u>	NONE						
PETLOVAČA Dibori	<u> </u>	NONE						
Ribari PRNJAVOR MAČVANSKI		NONE NONE						
PRNJAVOR MACVANSKI Podrinsko Novo Selo		NONE NONE						
LEŠNICA	between the 1st and 2nd track	34+900,00-35+025,00	platform	125,00	2,40	0,55		
Jadarska Straža	next to railway line - right	38+860,00-38+940,00	platform	80,00	0,35	1,60		
Lipnica	NONE							
LOZNICA		NONE						
	1	NONE						
Loznica Fabrika	1	56+170,00-56+213,00	platform	43,00	0,35	1,60		
Loznica Fabrika KOVILIAČA	hetween the 1st and 2nd track	JUI 1 / 0,00-JUT 4 1 J,00	pianomi	75,00	0,55	1,00		
KOVILJAČA	between the 1st and 2nd track							
KOVILJAČA Gornja Koviljača		NONE	platform	142 00	0.35	3.20		
KOVILJAČA	between the 1st and 2nd track between the 2 nd and 3 rd track next to railway line - right		platform platform	142,00 100,00	0,35 0,35	3,20 1,60		



		km position of the	D1 (C / 1]	Dimensions	<u> </u>		
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width		
		of platform		(m)	(m)	(m)		
1	2	3	4	5	6	7		
		nć - Kraljevo - Požega	1					
GTAL A G	between the 2nd and 3rd track	176+222-176+425	platform	203,00	0,28	6,40		
STALAĆ	between the 4th and 5th track	176+222-176+425	platform	203,00	0,28	6,40		
M:	between the 6th and 7th track	176+270-176+378	platform	108,00	0,28	5,30		
Mrzenica Makrešane	right side	3+868-3+910 NONE	platform	42,00	0,35	2,00		
DEDINA		NONE						
	between the 2nd and 3rd track	14+451-14+626	platform	175,00	0,35	2,84		
KRUŠEVAC	between the 3 rd and 4 th track	14+490,3-14+610,3	platform	120,00	0,35	1,60		
Čitluk		NONE						
KOŠEVI		NONE						
Globoder		NONE						
STOPANJA		NONE						
Donja Počekovina		NONE						
POČEKOVINA Trstenički Odžaci		NONE						
TRSTENIK	between the 2nd and 3rd track	NONE 42+400-42+500	platform	102,00	0,35	1,80		
VRNJAČKA BANJA	between the 2nd and 3rd track	49+136-49+241	platform	102,00	0,35	1,60		
Lipova	Secretaria and and and and track	NONE	piutioniii	100,00	0,55	1,00		
Tominac		NONE						
PODUNAVCI		NONE						
Vraneši		NONE	-		-			
Vrba		NONE						
RATINA		NONE						
Sirča	left side	68+880,70-68+940,40	platform	59,70	0,35	1,60		
KRALJEVO	between the 1st and 2nd track	84+641,9-84+774,9	platform	133	0,30	1,60		
ADRANI	between the 2nd and 3rd track between the 2nd and 3rd track	84+644,4-84+773 78+622,20-78+657,20	platform platform	128,6 35,00	0,30 0,35	1,60 1,60		
Mrsać	left side	81+513-81+553	platform	40,00	0,33	0,50		
SAMAILA	Tert side	NONE	piationii	70,00	0,55	0,50		
Goričani	left side	88+610-88+658	platform	48.00	0.37	1,00		
MRŠINCI	between the 2nd and 3rd track	92+241-92+279	platform	38.00	0.35	1,00		
Kukići		NONE						
ZABLAĆE		NONE						
Baluga	1.0.0	NONE			0.44			
ČAČAK	left from 1st track	105+500-105+590	platform	90,00	0,44	6,50		
CACAK	between the 1st and 2nd track	105+494-105+628	platform	134,00	0,37	1,60		
Trbušani	between the 2nd and 3rd track next to railway line - left	105+494-105+615 110+240-110+263	platform platform	23,00	0,38 0,40	1,60 1,60		
PRIJEVOR	between the 2nd and 3rd track	112+820-113+070	platform	250,00	0,40	1,60		
	next to railway line - right	120+450-120+550	platform	100,00	0,40	1,60		
OVČAR BANJA	between the 1st and 2nd track	120+450-120+652	platform	202,00	0,35	1,60		
Jelen Do	next to railway line - right	127+180-127+230	platform	50,00	0,40	1,60		
DRAGAČEVO	between the 2nd and 3rd track	128+295-128+405	platform	110,00	0,40	1,60		
Gugalj		NONE		-	<u> </u>	-		
Boračko		NONE	,					
POŽEGA	next to 1st track	140+720-140+975	platform	255,00	0,45	10,00		
	between the 2nd and 3rd track	140+675-140+984	platform	309,00	0,45	6,20		
	of Kraljevo station: (Mataruška l					nı)		
215 connecting	track of Požega station: (Uzićo) - s 216 Smederevo – Open line			054 - (Dra	gacevo)			
	between the 1st and 2nd track	0+000-0+103	platform	103,00	0,40	1,60		
SMEDEREVO	between the 1st and 2nd track	0+000-0+105	platform	105,00	0,40	1,60		
Godomin	next to railway line - left	3+303-3+350	platform	47,00	0,40	1,60		
	next to 1st track	6+650-6+800	platform	150,00	0,50	2,20		
RADINAC	between the 2nd and 3rd track	6+650-6+800	platform	150,00	0,60	6,20		
Vranovo	next to railway line - left	9+475-9+537	platform	62,00	0,40	1,90		
	between the 1st and 2nd track	69+030-69+175	platform	145,00	0,40	1,90		
MALA KRSNA	between the 2nd and 3rd track	69+030-69+175	platform	145,00	0,40	1,9		
WITTER KINDINA	between the 3rd and 4th track	69+042-69+184	platform	142,00	0,40	1,90		
	between the 4th and 5th track	69+080-69+230	platform	150,00	0,40	1,90		
		ction Jezava – Smederevo						
	218 Mala Krsna - Bor - C	Open line junction "2" - (\	v razogrnac)					



	1		Т			
g	Ŧ	km position of the	Platform/arranged		Dimensions	
Service point	Location	beginning and the end	surface	Length (m)	Height	Width
1	2	of platform			(m)	(m) 7
1	_	3		5	6	
	between the 1st and 2nd track	69+030-69+175	platform platform	145,00	0,40	1,90
MALA KRSNA	between the 2nd and 3rd track between the 3rd and 4th track	69+030-69+175 69+042-69+184	platform	145,00 142,00	0,40 0,40	1,90 1,90
	between the 3rd and 4th track	69+080-69+230	platform	150,00	0,40	1,90
Ljubičevski most	between the 4th and 5th track	NONE	piationii	130,00	0,40	1,90
-	between the 1st and 2nd track	87+703-87+826	platform	123,00	0,40	1,80
POŽAREVAC	between the 2nd and 3rd track	87+712-87+816	platform	104,00	0,40	1,60
Jugovićevo	next to track - left	89+078-89+094	platform	16,00	0,50	1,00
Sopot Požarevački	next to track -right	90+082-90+107	platform	24,00	0,40	1,60
BUBUŠINAC-BRATINAC	8	NONE	1	, , , , ,	- 7	
Bare - Kasidol		NONE				
STIG	between the 1st and 2nd track	102+693-102+764	platform	71,00	0,40	1,60
Majilovac		NONE				
SIRAKOVO	between the 1st and 2nd track	109+026-109+079	platform	53,00	0,40	1,60
LJUBINJE	between the 1st and 2nd track	116+381-116+444	platform	63,00	0,40	1,60
Češljeva Bara	next to railway line - left	122+138-122+200	platform	62,00	0,40	1,60
RABROVO-KLENJE	between the 1st and 2nd track	126+007-126+067	platform	60,00	0,40	1,60
Mustapić		NONE				
Mišljenovac ZVIŽD		NONE				
ZVIZD Kučevska Turija		NONE NONE				
KAONA		NONE				
KUČEVO		NONE				
Neresnica		NONE				
Neresnica (tov.)		NONE				
Voluja		NONE				
BRODICA	between the 2nd and 3rd track	164+515-164+576	platform	61,00	0,40	1,60
Bosiljkovac		NONE	1	,		
Blagojev Kamen		NONE				
MAJDANPEK	between the 2nd and 3rd track	178+769-178+920	platform	151,00	0,35	1,60
Debeli Lug	next to railway line - left	181+300-181+318	platform	18,00	0,35	1,60
LESKOVO	between the 2nd and 3rd track	187+660-187+722	platform	62,00	0,35	1,60
Jasikovo	next to railway line - left	191+810-191+890	arranged surface	80,00	0,09	1,60
Vlaole Selo	next to railway line - right	194+740-194+780	arranged surface	40,00	0,20	1,60
VLAOLE	between the 2nd and 3rd track	197+163-197+224	platform	61,00	0,35	1,60
Gornjane CEROVO	next to railway line - right	200+288-200+386 NONE	arranged surface	98,00	0,35	1,60
Kriveljski most	next to railway line - right	207+905-207+995	arranged surface	90,00	0,35	1,60
Kriveljski potok	next to railway line - left	211+873-211+913	arranged surface	40,00	0,35	1,60
MALI KRIVELJ	between the 1st and 2nd track	215+171-215+206	-		0,35	1,60
Brezonik	next to railway line - left	217+490-217+540	platform	35,00 50,00	0,35	1,60
	next to 1st track	221+369-221+452	platform	83,00	0,35	8,00
BOR	between the 2nd and 3rd track	221+352-221+452	platform	100,00	0,35	1,60
BOR FREIGHT STATION	between the 2nd and 3rd track	224+320-224+375	platform	55,00	0,35	1,60
BORSKA SLATINA		NONE		-	· '	
ZAGRAĐE		NONE				
RGOTINA	between the 1st and 2nd track	244+658-244+738	platform	80,00	0,35	1,60
		rst - Zaječar – Prahovo Pr				
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00	0,40	1,60
Pantelej	next to railway line - left	7+455-7+507	platform	52,00	0,35	1,60
MATEJEVAC	between the 1st and 2nd track	12+370-12+395	platform	25,00	0,35	1,50
Gornja Vrežina Jasenovik		NONE				
Jasenovik GRAMADA	between the 1st and 2nd track	NONE 30+232-30+282	platform	50,00	0,35	1,60
Hadžićevo	between the 1st and 2llu track	NONE	pianoilli	50,00	0,55	1,00
SVRLJIG	between the 1st and 2nd track	39+925-40+075	platform	150,00	0,35	1,60
Niševac	next to railway line - right	46+002-46+018	platform	16,00	0,35	1,60
PALILULA	between the 1st and 2nd track	49+320-49+355	platform	35,00	0,35	1,60
Svrljiški Miljkovac	and the same and t	NONE	r	,	, ,,,,,	.,
PODVIS	between the 1st and 2nd track			0,35	1,60	
Rgošte		NONE		, -		
KNJAŽEVAC	between the 1st and 2nd track	68+338-68+392	platform	54,00	0,35	1,60
Gornje Zuniče	next to railway line - right	72+080-72+142	platform	62,00	0,35	1,60
		·				



		km position of the		T	Dimension	9
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
Service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
Donje Zuniče	next to railway line - right	74+988-75+076	platform	88,00	0,35	1,60
MINIĆEVO			•		0,35	
WIINICEVO	between the 1st and 2nd track	81+830-81+930	platform platform	100,00 45,00	0,35	1,60 1,60
C -1 - ¥1 D -1		81+930-81+975	-			
Selačka Reka	next to railway line - right	84+450-84+500	arranged surface	50,00	0,35	1,60
Mali Izvor	next to railway line - right	88+180-88+230	platform	50,00	0,35	1,60
Vratarnica	between the 1st and 2nd track	96+048-96+098	platform	50,00	0,35	1,60
GRLJAN	between the 1st and 2nd track	102+955-103+105	platform	150,00	0,35	1,60
Timok	next to railway line - left	107+320-107+380	arranged surface	60,00	0,35	1,60
×	between the 1st and 2nd track	111+622-111+820	platform	198,00	0,35	1,60
ZAJEČAR	between the 2nd and 3rd track	111+662-111+815	platform	153,00	0,35	1,60
· · · · · · · · · · · · · · · · · · ·	between the 3rd and 4th track	111+651-111+803	platform	152,00	0,35	1,60
VRAŽOGRNAC	between the 1st and 2nd track	118+760-118+910	platform	150,00	0,35	1,60
TRNAVAC	between the 1st and 2nd track	124+593-124+668	platform	75,00	0,35	1,60
Čokonjar	next to railway line - left	128+500-128+550	platform	50,00	0,35	1,60
Sokolovica	next to railway line - right	131+100-131+125	platform	25,00	0,35	1,60
TABAKOVAC	between the 1st and 2nd track	136+170-136+223	platform	53,00	0,35	1,60
Tabakovačka reka	next to railway line - right	138+740-138+790	platform	50,00	0,35	1,60
BRUSNIK	between the 1st and 2nd track	145+616-145+696	platform	80,00	0,35	1,60
Tamnič	next to railway line - right	148+420-148+480	platform	60,00	0,35	1,60
Crnomasnica	next to railway line - right	151+323-151+364	platform	41,00	0,35	1,60
Rajac	next to railway line - right	154+430-154+505	platform	75,00	0,35	1,60
ROGLJEVO	between the 1st and 2nd track	156+795-156+875	platform	80,00	0,35	1,60
Veljkovo		NONE	F	,	0,00	-,00
Mokranja		NONE				
Kobišnica		NONE				
NEGOTIN	between the 2nd and 3rd track	174+049-174+199	platform	150,00	0,35	1,60
PRAHOVO	between the 2nd and 3rd track	181+974-182+054	platform	80,00	0,35	1,60
PRAHOVO PRISTANIŠTE	between the 2nd and 31d track	NONE	plationii	00,00	0,55	1,00
FRANOVOFRISTANISTE	220 (Rgotina) - Open line junct		on 12 (Tumovos)			
		n line junction "1" - Kurš				
KURŠUMLIJA	221 (Barlovo) - Ope		шшца			
		NONE				
KUKSUMLIJA	222 K	NONE určumlija Kastrat				
	222 K	uršumlija - Kastrat				
KURŠUMLIJA		uršumlija - Kastrat NONE	Polio			
	223 Doljevac - Ka	uršumlija - Kastrat NONE strat – Merdare - Kosovo		100	0.40	1.60
	223 Doljevac - Ka between the 1st and 2nd track	uršumlija - Kastrat NONE strat – Merdare - Kosovo 261+419-261+527	platform	108	0,40	1,60
KURŠUMLIJA DOLJEVAC	223 Doljevac - Ka	NONE strat – Merdare - Kosovo 261+419-261+527 261+419-261+526		108 107	0,40	1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac	223 Doljevac - Ka between the 1st and 2nd track	NONE strat – Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE	platform			
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac	223 Doljevac - Ka between the 1st and 2nd track	uršumlija - Kastrat NONE strat – Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE	platform			
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica	223 Doljevac - Ka between the 1st and 2nd track	nršumlija - Kastrat NONE strat – Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE	platform			
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA	223 Doljevac - Ka between the 1st and 2nd track between the 2nd and 3rd track	nršumlija - Kastrat NONE strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE	platform platform	107	0,40	1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar	223 Doljevac - Ka between the 1st and 2nd track	NONE strat – Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977	platform			
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica	223 Doljevac - Ka between the 1st and 2nd track between the 2nd and 3rd track	NONE Strat – Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE	platform platform	107	0,40	1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir	223 Doljevac - Ka between the 1st and 2nd track between the 2nd and 3rd track	NONE Strat – Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE	platform platform	107	0,40	1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina	223 Doljevac - Ka between the 1st and 2nd track between the 2nd and 3rd track next to railway line - left	nršumlija - Kastrat NONE strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE NONE NONE NONE	platform platform platform	52,00	0,40	1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok	223 Doljevac - Ka between the 1st and 2nd track between the 2nd and 3rd track next to railway line - left next to railway line - right	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE	platform platform platform platform	52,00 48,00	0,40	1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE NONE 18+726-18+774 22+257-22+370	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja	223 Doljevac - Ka between the 1st and 2nd track between the 2nd and 3rd track next to railway line - left next to railway line - right	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027	platform platform platform platform	52,00 48,00	0,40	1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE NONE NONE NONE NONE NONE NONE NON	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE NONE NONE 18+726-18+774 22+257-22+370 24+990-25+027 NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE Strat - Merdare - Kosovo 261+419-261+527 261+419-261+526 NONE NONE NONE NONE 10+925-10+977 NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka Ljuša	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka Ljuša Rudare	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka Ljuša Rudare Dešiška KOSANIČKA RAČA	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60
KURŠUMLIJA DOLJEVAC Šajinovac Toplički Badnjevac Jasenica ŽITORAĐA Žitorađa Centar Rečica Lukomir Podina Babin Potok PROKUPLJE Gornja Draganja Toplička Mala Plana Bresničići BELOLJIN Toplica Milan Pločnik Barlovo Novoselske Livade Pepeljevac Rasputnica Kastrat Visoka Ljuša Rudare Dešiška	between the 1st and 2nd track between the 2nd and 3rd track between the 2nd and 3rd track next to railway line - left next to railway line - right between the 1st and 2nd track	NONE NONE	platform platform platform platform platform platform	52,00 48,00 113,00	0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60



	1	km position of the		Т	Dimension	10						
Corrigo point	Location	beginning and the end	Platform/arranged			Width						
Service point	Location	of platform	surface	Length	Height							
1	2	3	4	(m) 5	(m) 6	(m) 7						
Vasiljevac	Z	NONE	+	<u> </u>	Ü	/						
Merdare		NONE										
Wierdare	224 Kosovo	Polje - Metohija – Peć**										
		t - Open line junction 1 - (Drenica) **									
		Vrbas - Sombor	Di cilica)									
	between the 2nd and 3rd track	116+702-116+770,3	platform	68,00	0,35	1,40						
VRBAS	between the 3rd and 4th track	116+702-116+770,3	platform	68,00	0,35	1,40						
KULA	between the 3rd and 4rd track	47+626-47+667	platform	41,00	0,33	1,52						
CRVENKA	between the 1st and 2nd track	54+956-54+986	platform	30,00	0,25	1,56						
SIVAC	between the 1st and 2nd track		piationii	30,00	0,13	1,50						
Novi Sivac	NONE NONE											
KLJAJIĆEVO	between the 1st and 2nd track	75+417-75+456	platform	39,00	0,15	1,38						
Čonoplja	between the 1st and 2nd track	79+692-79+722	platform	39,00	0,15	1,38						
Сопоріја	between the 1st and 2nd track	73+417-73+477	platform	60,00	0,13	1,61						
	between the 1st and 2nd track	73+584-73+612	arranged surface	28,00	0,05	1,50						
	between the 1st and 2nd track	73+384-73+612	arranged surface	150,00	0,05	1,50						
SOMBOR					,							
	between the 2nd and 3rd track	73+417-73+477	platform	60,00	0,38	1,61						
	between the 2nd and 3rd track	73+584-73+612	arranged surface	28,00	0,05	1,50						
	between the 3rd and 4th track	73+584-73+701	arranged surface	117,00	0,05	1,50						
		D 4 11 11/4 17 1 11 11/4										
		RAILWAY LINES										
	301 Subotica - Subotica Fabrika		UT OF SERVICE									
		ica - Subotica Bolnica	ı									
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70						
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60						
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70						
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70						
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70						
	303 Novi Sad(km	1+042) - Novi Sad Ložion	ica									
	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00						
	between the 11th and 10th	77+822-77+950	platform	128,00	0,40	3,72						
	track	771022-771930	plationii	120,00	0,40	3,72						
NOVI SAD	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20						
110 115110	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90						
	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75						
	између 12. и 1. колосека	78+104-78+250	platform	146,00	0,40	8,90						
	између 14. и 13. колосека	78+104-78+249	platform	145,00	0,40	6,46						
	304 Podbara - Open line june											
309	5 (Rimski Šančevi) - Open line ju		ction "3" - (Podba	ra)								
	306 Rin	mski Šančevi- Bečej										
RIMSKI ŠANČEVI		NONE										
Bački Jarak		NONE										
TEMERIN		NONE										
GOSPOĐINCI		NONE										
ŽABALJ		NONE										
ČURUG		NONE										
Bačko Gradište		NONE										
Bečej predgrađe		NONE										
BEČEJ	<u></u>				<u></u>							
BEČEJ	308 (Brasina) - Open line j	junction Donja Borina – Z	vornik Grad									
BEČEJ ZVORNIK GRAD		NONE										
ZVORNIK GRAD		NONE		92,00	0,40	1,60						
	309 Pančevo	NONE Varoš - Pančevo Vojlovica		92,00 240,00	0,40	1,60 1,60						
ZVORNIK GRAD	309 Pančevo next to 1st track	NONE Varoš - Pančevo Vojlovica 18+131-18+223	station plateau			,						
ZVORNIK GRAD	309 Pančevo v next to 1st track between the 1st and 2nd track	NONE Varoš - Pančevo Vojlovica 18+131-18+223 18+105-18+345	station plateau	240,00	0,40	1,60						
ZVORNIK GRAD PANČEVO VAROŠ Pančevo Strelište	next to 1st track between the 1st and 2nd track between the 2nd and 3rd track	NONE Varoš - Pančevo Vojlovica 18+131-18+223 18+105-18+345 18+100-18+364	station plateau platform platform	240,00 264,00	0,40 0,40	1,60 1,60						
ZVORNIK GRAD PANČEVO VAROŠ	next to 1st track between the 1st and 2nd track between the 2nd and 3rd track next to railway line - left	NONE Varoš - Pančevo Vojlovica 18+131-18+223 18+105-18+345 18+100-18+364 1+290-1+400	station plateau platform platform platform	240,00 264,00 110,00	0,40 0,40 0,40	1,60 1,60 1,60						
ZVORNIK GRAD PANČEVO VAROŠ Pančevo Strelište PANČEVO VOJLOVICA	next to 1st track between the 1st and 2nd track between the 2nd and 3rd track next to railway line - left between the 3rd and 4th track	NONE Varoš - Pančevo Vojlovica 18+131-18+223 18+105-18+345 18+100-18+364 1+290-1+400 2+632-2+852 2+645-2+965	station plateau platform platform platform platform platform platform	240,00 264,00 110,00 220,00 220,00	0,40 0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60						
ZVORNIK GRAD PANČEVO VAROŠ Pančevo Strelište PANČEVO VOJLOVICA	next to 1st track between the 1st and 2nd track between the 2nd and 3rd track next to railway line - left between the 3rd and 4th track next to 4th track g track of Senta station: (Čoka)	NONE Varoš - Pančevo Vojlovica 18+131-18+223 18+105-18+345 18+100-18+364 1+290-1+400 2+632-2+852 2+645-2+965	station plateau platform platform platform platform platform platform separation switch	240,00 264,00 110,00 220,00 220,00	0,40 0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60						
ZVORNIK GRAD PANČEVO VAROŠ Pančevo Strelište PANČEVO VOJLOVICA	next to 1st track between the 1st and 2nd track between the 2nd and 3rd track next to railway line - left between the 3rd and 4th track next to 4th track g track of Senta station: (Čoka)	NONE Varoš - Pančevo Vojlovica 18+131-18+223 18+105-18+345 18+100-18+364 1+290-1+400 2+632-2+852 2+645-2+965 - separation switch No22 -	station plateau platform platform platform platform platform platform separation switch	240,00 264,00 110,00 220,00 220,00	0,40 0,40 0,40 0,40 0,40	1,60 1,60 1,60 1,60						



		km position of the	Platform/arranged	Dimensions								
Service point	Location	beginning and the end	surface	Length	Height	Width						
		of platform	Surrace	(m)	(m)	(m)						
1	2	3	4	5	6	7						
	between the 4th and 5th track	100+350-100+448	platform	92	0.4	1.6						
	312 M	etohija - Prizren**										
	313 V	ršac – Bela Crkva										
VRŠAC	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	0,40	1,60						
VRSAC	between the 2nd and 3rd track	platform	95,00	0,40	1,60							
Potporanj		NONE										
Straža												
JASENOVO		NONE										
Crvena Crkva		NONE										
	between the 1st and 2nd											
BELA CRKVA	track	119+052-119+082	platform	30,00	0,30	1,60						
	SHUNTING LINES											
		ac - Vršac Vašarište										
¥	between the 1st and 2nd track	82+807,5-82+902,5	platform	95.00	0,40	1,60						
VRŠAC	between the 2nd and 3rd track	82+807,5-87+902,5	platform	95.00	0.40	1,60						
	402 Kikinda – Metano	olsko sirćetni kompleks (k		,		, , , , , ,						
WIWDID A	next to 1st track	160+030-160+166	platform	136,00	0,19	3,30-4,40						
KIKINDA	between the 1st and 2nd track	160+064-160+190	arranged surface	126,00	0,00	1,50						
	403 Bogojevo – Dunavs	ka Obala – TRAFFIC SU	SPENDED									
		opovac - TRAFFIC SUSP										
	405 Sur	čin – Jakovo-Bečmen										
SURČIN		NONE	3									
	406 Šid- Sremska Ra	ča Nova - state border - (F	Bijeljina)									
	between the 1st and 2nd track	116+300-116+490	arranged surface	190,00	0,10	2,50						
ŠID	between the 2nd and 3rd track	116+300-116+665	platform.	365,00	0,45	1,60						
	between the 3rd and 4th track	116+300-116+677	platform	377,00	0,45	1,60						
Adaševci		NONE	·									
MOROVIĆ	between the 1st and 2nd track	12+360-12+390	platform	30,00	0,35	1,60						
VIŠNJIĆEVO	between the 1st and 2nd track	19+633-19+655	platform	22,00	0,35	1,60						
Rasputnica Rača		NONE				T.						
SREMSKA RAČA NOVA	between the 1st and 2nd track	24+169-24+205	platform	36,00	0,35	1,60						
		Skela - TRAFFIC SUSP	ENDED									
		ıta – Apatin Fabrika										
	409 Bačka Palanka – G	Sajdobra - TRAFFIC SUS	SPENDED									

^{*} not intended for handling of passengers

Note: In column one halts are marked with small letters and all other service points with capital letters.



^{**} The lines on the territory of Kosovo and Metohija are temporarily under the supervision of UNMIK, according to the Temporary Agreement between ŽTP Belgrade and UNMIK railways, dated May 31, 2002 (records No 300/2002 - 153 dated May 31, 2002).

Appendix 9. Method for calculation of electricity consumption for train traction

Compensation for calculation of electricity consumption for train traction is determined as follows:

$$Csv/brtkm = \frac{MES.RAČ-TROŠ.INF}{BRTKMter + K*BRTKMput}$$

where:

Csv/brtkm – monthly rate of electric energy spent for train traction, expressed in RSD per grosstonne km.

MES.RAČ – monthly bill amount for high voltage electric energy issued by electric energy supplier.

TROŠ.INF – monthly expenses for electric energy for train traction need used by "Infrastruktura železnice Srbije"

BRTKMter – total (all railway undertakings) monthly freight transport expressed in gross-tonne km.

K – coefficient by means of which is taken into consideration that passenger trains consume more electric energy per gross-tonne km than freight trains.

BRTKMput – total (all railway undertakings) monthly passenger transport expressed in gross-tonne km.

The compensation amount per individual RU is calculated by multiplication of monthly rate of electrical energy for train traction with gross-tonne kilometers realized by the respective RU (BRTKMter for freight service, and K* BRTKMput for passenger service):

Ntern = Csv/btkm * BRTKMtern for freight service, i.e

Nputn = Csv/btkm * K * BRTKMputn for passenger service,

where:

Ntern – compensation paid by x RU in freight service for the consumption of electrical traction, expressed in RSD.

BRTKMtern – gross-tonne kilometres realized by x RU in freight service in the given month.

Nputn - compensation paid by x RU in passenger service for the consumption of electrical traction, expressed in RSD.

BRTKMputn - gross-tonne kilometres realized by x RU in passenger service in the given month.

The compensation is paid to Infrastructure Manager on a monthly basis, based on the issued bill.

K coefficient values are as follows:

month	I	П	Ш	IV	V	VI	VII	VIII	IX	X	XI	XII
K	2	1,8	1,7	1,5	1,35	1,4	1,4	1,4	1,35	1,5	1,7	1,9



Appendix 10. Railway node boundaries

Node	Border station (service point) of the node	Chainage of the station (service point)	Entry signal from the direction	Railway line	Chainage of mandatory signal	Distance [m]
	Batajnica	19+031 ^P / 20+616 ^T	Nova Pazova	101 Belgrade Center - Stara Pazova - Šid - state border - (Tovarnik)	19+960 ^P / 21+396 ^F	929 ^P / 780 ^F
Э	Ovča	12+555 / 12+653	Pančevo Main St.	107 Belgrade Denter - Pančevo Main St Vršac - state border - (Stamora Moravita)	13+550 / 13+647	995
BEOGRAD	Jajinci	10+988	Beli Potok (Mala Krsna)	103 (Belgrade Center) - Rakovica - Jajinci - Mala Krsna - Velika Plana	12+045	1057
BEC	Resnik	14+059	Pinosava (Mladenovac)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	14+848	789
	Resnik	0+000	Bela Reka (Valjevo)	108 (Belgrade Center) - Resnik - Požega - Vrbnica - state border - (Bijelo Polje)	0+825	825
	Naumovićevo	166+519	Žednik (Vrbas)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	165+640	879
ПСА	Palić	7+658	Bački Vinogradi (Horgoš)	201 Subotica - Horgoš - state border - (Roszke)	8+614	956
SUBOTICA	Subotica	76+739	Orom (Senta)	205 Banatsko Miloševo - Senta - Subotica	74+990	1751
S	Subotica Freight St.	75+972	Orom (Senta)	205 Banatsko Miloševo - Senta - Subotica	74+990	982
	Šebešić	123+761	Tavankut (Sombor)	110 Subotica - Bogojevo - state border - (Erdut)	122+915	846
	Novi Sad	77+101	Rumenka (Vrbas)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	78+552	1542
	Sajlovo rasp. i odj.	0+000	Futog (Bogojevo)	207 Novi Sad - Odžaci - Bogojevo	0+280	280
NOVISAD	Sajlovo rasp. i odj.	0+000	Rimski Šančevi (Orlovat)	208 (Novi Sad) - Open line junction Sajlovo - Rimski Šančevi - Orlovat Stajalište	4+093	1370
NO	Sajlovo rasp. i odj.	0+000	Rumenka (Vrbas)	Sajlovo - Rumenka	1+295 / 1+248	1287
	Petrovaradin	70+870	Sremski Karlovci (Inđija)	105 (Belgrade Center) – Stara Pazova – Novi Sad – Subotica – state border – (Kelebia)	69+870	1000
OVO	Lapovo Varoš	106+302	Markovac (Velika Plana)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	105+710	592
LAPOV	Lapovo	109+597	Bagrdan (Stalać)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	110+540	943
	Batočina	3+405	Badnjevac (Kragujevac)	109 Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral Janković - state border - (Volkovo)	4+419	1014
	Trupale	234+939	Grejač (Stalać)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	233+934	1005
NIŠ	Crveni Krst	0+000	Matejevac (Zaječar)	219 (Niš) - Crveni krst - Zaječar - Prahovo Pristanište	(0+957=3+455) 3+736	1238
	Međurovo	249+462	Doljevac	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	250+323	861
	Ćele Kula	5+461	Niška Banja (Pirot)	106 Niš - Dimitrovgrad - state border - (Dragoman)	6+320	859
00	Pančevo Main St.	16+069	Ovča (Beograd)	107 Belgrade Center - Pančevo Main St Vršac - state border - (Stamora Moravita)	14+878	1191
PANČEVO	Pančevo varoš	18+206	Banatsko Novo Selo (Vršac)	107 Belgrade Center - Pančevo Main St Vršac - state border - (Stamora Moravita)	19+242	1036
P/	Open line junction 2a	17+659	Jabuka (Zrenjanin)	202 Pančevo Main St Zrenjanin - Kikinda - state border - (Jimbolia)	18+160	501



P – passenger traffic (from the direction of Novi Sad) F- freight traffic (mixed, from the direction of Šid)