INFRASTRUCTURE OF SERBIAN RAILWAYS JSC

NETWORK STATEMENT 2025

Adopted by the Shareholders' Meeting of "Infrastructure of Serbian Railways" JSC

No: 5/2023-525-204 dated December 12th, 2023

Effective as of December 15th, 2024

Applicable to 2024/2025 Timetable

На основу члана 20. став 6. Закона о железници ("Службени гласник РС", бр. 41/18 и 62/23) и члана 17. став 1. и члана 43. став 2. Закона о Влади ("Службени гласник РС", бр. 55/05, 71/05 - исправка, 101/07, 65/08, 16/11, 68/12 - УС, 72/12, 7/14 - УС, 44/14 и 30/18 - др. закон),

Влада доноси

Р Е Ш Е Њ Е О ДАВАЊУ САГЛАСНОСТИ НА ОДЛУКУ О ВИСИНИ ЦЕНА ПРИСТУПА И ЦЕНА ПРИСТУПА ДЕЛУ ЈАВНЕ ЖЕЛЕЗНИЧКЕ ИНФРАСТРУКТУРЕ КОЈИ ПОВЕЗУЈЕ СА УСЛУЖНИМ ОБЈЕКТИМА ЗА РЕД ВОЖЊЕ 2024/2025

I

Даје се сагласност на Одлуку о висини цена приступа и цена приступа делу јавне железничке инфраструктуре који повезује са услужним објектима за Ред вожње 2024/2025, коју је донела Скупштина Акционарског друштва за управљање јавном железничком инфраструктуром "Инфраструктура железнице Србије", Београд, на седници од 21. септембра 2023. године.

II

Ово решење објавити у "Службеном гласнику Републике Србије".

05 Број: 338-11265/2023

У Београду, 20. новембра 2023. године

влада

Тачност преписа оверава ГЕНЕРАЛНИ СЕКРЕТАР

ПРЕДСЕДНИК

Новак Недић

Ана Брнабић, с.р.



Amendments, corrections, and interpretations

No	Subject	Determined by the Decision No.	Valid as of
1	7.3.5, Appendices 3.11 and 6	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision 5/2024-535- 212 dated Aprl 2 nd 2024	April 2 nd , 2024
2	1.1; 4.2; Appendices 1, 3.10 and 4.1.b	Infrastructure of Serbian Railways JSC Shareholders' Meeting Decision 5/2024-542- 215 dated May 29 th 2024	May 29 th , 2024



TABLE OF CONTENTS

TERMS AND ABBREVIATIONS	
1. GENERAL INFORMATION	
1.1 Introduction	
1.2 Purpose of the Network Statement	
1.3 Legal Aspects	
1.3.1 Legal Framework	
1.3.2 Legal Status and Liability	
1.3.3 Appeals Procedure	
1.4 Structure of the Network Statement	
1.5 Validity Period, Updating and Publishing	
1.5.1 Validity Period of the Network Statement	
1.5.2 Updating Process	
1.5.3 Publishing, Distribution and Availability of the Network Statement	
1.6 Contacts	
1.7 Cooperation Between European IMs/ABs	
1.7.1 Rail Freight Corridors	
1.7.2 RailNetEurope	
2. INFRASTRUCTURE	
2.1 Introduction	
2.2 Extent of Network	21
2.2.1 Limits	
2.2.2 Connecting Railway Networks	21
2.3 Network Description	23
2.3.1 Geographic data and types of railway lines	23
2.3.2 Track Gauges	25
2.3.3 Stations and Nodes	25
2.3.4 Loading Gauge	25
2.3.5 Weight Limits	26
2.3.6 Line Gradients	26
2.3.7 Maximum Line Speeds	27
2.3.8 Maximum Train Lengths	27
2.3.9 Power Supply	28
2.3.10 Signalling Systems	
2.3.11 Traffic Control Systems	
2.3.12 Communication Systems	
2.3.13 Train Control Systems	
2.4 Traffic Restrictions	
2.4.1 Specialised Infrastructure	
2.4.2 Environmental Restrictions	
2.4.3 Dangerous Goods	
2.4.4 Tunnel Restrictions.	
2.4.5 Bridge Restrictions	
2.5 Availability of the Infrastructure	
2.6 Infrastructure Development	
3. ACCESS CONDITIONS	
3.1 Introduction	
3.2 General Access Requirements	
3.2.1 Conditions for Applying for Capacity	
3.2.2 Conditions for Access to the Railway Infrastructure	
3.2.3 Licenses	
3.2.4 Safety Certificate	
3.2.5 Coverage for Civil Liability (Insurance)	
3.3 Contractual Arrangements	
3.3.1 Framework Agreement	
5.5.1 1 mine work 1 is rounded	



3.3.2 Contracts with RUs	38
3.4 Specific Access Requirements	39
3.4.1 Rolling Stock Acceptance	39
3.4.2 Staff Acceptance	39
3.4.3 Exceptional Transport	39
3.4.4 Transport of Dangerous Goods	40
4. CAPACITY ALLOCATION	
4.1 Introduction	
4.2. Description of infrastructure capacity allocation procedure	
4.3 Allocation of capacity for maintenance, including the allocation process	
4.4. Impact of Framework Agreements	
4.5 Schedule for Path Requests and Allocation Process	
4.5.1 Schedule of requests submission for new annual timetabling process	
4.5.3 Allocation of capacities during annual Timetable validity period on ad hoc reques	
4.5.4 Path Allocation and Coordination Process	
4.5.5 Dispute Resolution Process	
4.6 Congested Infrastructure	
4.7. Exceptional Transports and Dangerous Goods	
4.8 Rules After Path Allocation	
4.8.1 Non-usage of allocated train path	
4.8.2. Rules of Cancellation.	
4.9. International Timetabling Process Redesign (TTR)	
4.9.1. Objectives of TTR	
5. SERVICES AND CHARGES	51
5.1 Introduction	51
5.2 Charging Principles	
5.2 Minimum Access Package and Charges	52
5.4 Additional Services and Charges	
5.5 Ancillary Services and Charges	
5.6 Discounts	
5.7 Performance Scheme	62
5.8 Changes to Charges	
5.9 Billing Arrangements	
5.10 Tariff system	
6. OPERATIONS	
6.1 Introduction	
6.2 Operational Rules	
1	
6.3.1. Principles	
6.3.2. Operation regulation	
6.3.3. Foreseen and Unforeseen problems	
7. SERVICE FACILITIES	
7.1. Introduction	
7.2. Service Facility Overview	
7.3. Service Facilities Managed by IŽS	
7.3.1. Common Provisions	
7.3.2 Use of station buildings in the function of passenger traffic	
7.3.3 Freight Terminals	
7.3.4 Marshalling Yards and Train Formation Facilities, including Shunting Facilities	70
7.3.5 Storage Sidings	75
7.3.6 Maintenance facilities	76
7.3.7 Other Technical Facilities, including Cleaning and Washing Facilities	76
7.3.8 Maritime and Inland Port Facilities	
7.3.9 Relief Facilities.	
7.3.10 Refuelling Facilities.	
APPENDICES	
Appendix 1: Organizational chart of "Infrastructure of Serbian Railways" JSC	
- 177 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	, 03

5



Appendix 2: Internal regulations (documents) and technological procedures	84
Appendix 3.1. Loading Gauge ŽS I	85
Appendix 3.2. Loading Gauge UIC-GA	86
Appendix 3.3. Loading Gauge UIC-GB	87
Appendix 3.3a Loading Gauge UIC-GC	88
Appendix 3.4. Electrified lines	89
Appendix 3.5 Power supply facilities	91
Appendix 3.6 Overview of signaling & safety devices equipping level	94
Appendix 3.7 Overview of telecommunication devices equipping level	98
Appendix 3.8. List of service points where it is possible to perform the transshipment of dangerous goods	3105
Appendix 3.9. Alternative transport routes	
Appendix 3.10. Facilities for rolling stock maintenance	111
Appendix 3.10a. Information on the service facility managed by Nelt Co	117
Appendix 3.11. Railway infrastructure development projects	119
Appendix 4.1. Request for train path allocation (form)	120
Appendix 4.1a. Request for train path allocation (e-papir)	121
Appendix 4.1b Template for submission of traction vehicle technical data	124
Appendix 4.2. Instruction for completion of the Request for train path allocation	125
Appendix 4.3. Deadlines for annual 2024/2025 timetable preparation	127
Appendix 4.4. Deadlines for amendments to annual 2024/2025 Timetable	128
Appendix 5.1. Overview of railway lines on which train running is possible when they are manned only	with
engine driver	
Appendix 5.2. Overview of the lines fulfilling the conditions for train running with an engine driver only	130
Appendix 5.3. Geometry of pantograph (current collector) TIP POS - 254/III used on IŽS network	131
Appendix 6. Register of infrastructure data	132
Appendix 7. Overview of primary train delay causes	
Appendix 8 Overview of platforms and arranged surfaces in service points	154
Appendix 9 Method for calculation of electricity consumption for train traction	172
Appendix 10 Railway node boundaries	173



TERMS AND ABBREVIATIONS

Terms:

Public railway infrastructure

means the entire railway infrastructure constituting a network operated by the infrastructure manager, but not including the railway lines and secondary tracks (industrial railway lines and industrial tracks) connected to the network;

Infrastructure Manager is a public enterprise or a company responsible for construction, exploitation, maintenance, and rehabilitation of railway infrastructure on the network, as well as for participation in its development within the general policy of infrastructure development and financing;

Railway Undertaking

is a company or other legal entity, registered for the prevailing activity of provision of freight and/or passenger railway transport services, to whom the license was issued, with an obligation to provide train traction or that provides train traction only. In terms of access to railway infrastructure, service facilities and services in connection to performing of railway transport, a railway undertaking is also a company or other legal entity that performs railway transport for its own purposes and to whom the license for transport for its own purposes was issued;

Freight Terminal

is a facility along the railway lines with freight transport, specifically arranged in order to enable loading of goods onto the freight trains and/or unloading of goods from such trains, as well as integration of services of railway freight transport with the services of road, maritime, inland waterway and air transport, i.e. forming or changing the composition of freight trains, and, if necessary, it is used to implement the border procedures at the borders with other countries;

Transport License

is a document by which a relevant licensing authority confirms the capacity of a company or other legal entity, registered for provision of the activity of public transport of goods and/or passengers, to provide railway transport services as a railway undertaking, which can be limited to the provision of certain types of services or the provision of railway transport for own purposes;

Applicant

means a railway undertaking or an international grouping of railway undertakings, or other persons or legal entities, such as competent authorities, consignors, forwarding agents or combined transport operators, having the commercial interest for provision of public service or commercial interest for allocation of railway infrastructure capacity;

Ad hoc request

is a request for individual train paths submitted during the validity of the established timetable;

Network

is a network of railway lines, including the connecting lines and secondary tracks, with elements of railway infrastructure, operated by the Infrastructure Manager; intended for railway transport of goods and/or passengers, as well as for transport for own purposes, which can be performed by railway undertakings according to the principle of transparent and non-discriminatory



access to the network;

Path

is the capacity of railway infrastructure necessary for train movement between two service points, within the envisaged period of time and under the precisely determined technical and technological conditions on the public railway infrastructure;

during a certain period of time;

Timetable

is a formal document of the public railway infrastructure manager setting out the schedule of operation for passenger and freight trains as well as for trains operated for own purposes on the public railway infrastructure of the infrastructure manager;

Infrastructure capacity

is a possible number of train paths for timetabling on the particular part of public railway infrastructure over a given period of time;

Congested infrastructure

is a section of railway infrastructure for which infrastructure capacity demand cannot be completely satisfied during certain time periods, even after different infrastructure capacity requests have been coordinated;

Path allocation

is the allocation of public railway infrastructure capacities by the infrastructure manager;

Access right

is the right of a railway undertaking to use the railway infrastructure;

Coordination

is a process whereby the infrastructure manager and applicants make an adjustment of individual requests for path allocation;

Safety Certificate

means evidence that a railway undertaking has established the safety management system and that it meets the requirements set out in the technical specifications of interoperability, national safety regulations and other relevant regulations in order to control the risks and perform safe railway traffic operations on the network;

Competent institution, Relevant authority (body)

is an authority entitled to adopt various decisions relating to particular fields;

Relevant Railway Authority is an authority authorised to act regarding the administrative issues in the railway sector of the Republic of Serbia (Directorate for Railways or the Ministry of Construction, Transport and Infrastructure, as the case may be).

Service Facility
Operator

is an entity responsible for operating one or more service facilities or for providing one or more services to railway undertakings (basic, additional and/or accompanying), including operating of railway infrastructure which



forms a part of a service facility.

Information about service facility

is a document containing detailed information necessary for access to a service facility and services (basic, additional and accompanying) with reference to performing of railway transport provided by the operator in that service facility.



The abbreviations used in the Network Statement have the following meanings:

ATC Automatic Train Control

AGC European Agreement on Main International Railway Lines

AGTC European Agreement on Important International Combined Transport Lines and Related

Installations

EU European Union FTE Forum Train Europe IM Infrastructure Manager

MCTI Ministry of Construction, Transport and Infrastructure of the Republic of Serbia

MF Ministry of Finance of the Republic of Serbia

NS Network Statement
DG Dangerous goods
OSS One-Stop-Shop

RID (2017) Regulations concerning the international carriage of dangerous goods by rail

RNE RailNetEurope (European Infrastructure Managers Association)

UIC International Union of Railways

DR Directorate for Railways – Regulatory Body in the Republic of Serbia

IŽS "Infrastructure of Serbian Railways" JSC

EMU Electric multiple-unit set
DMU Diesel multiple-unit set

TOR Top of rail

RS Republic of Serbia

LTDG Law on Transport of Dangerous Goods ("Official Gazette of the RS" no. 106/2016,

83/2018, 95/2018 (other law), 10/2019 (other law))

GSM-R Global System for Mobile Communications – Railway

ERTMS European Rail Traffic Management System

ETCS European Train Control System



1. GENERAL INFORMATION

1.1 Introduction

"Infrastructure of Serbian Railways" JSC (hereinafter IŽS) is a joint stock company for the management of public railway infrastructure (hereinafter: railway infrastructure), founded by the Republic of Serbia.

Railway infrastructure represents goods in general use, owned by the Republic of Serbia, that can be used by railway undertakings, on equal terms, in accordance with the Law on Railways.

Management of railway infrastructure is an activity of general interest.

Railway infrastructure includes permanent way and substructure, tunnels, bridges and other track structures, station tracks, level crossings including devices for securing of level crossings; safety, signaling and telecommunication installations on open lines, in stations and marshalling yards, including the plants for generating, transforming and distribution of electric energy for signaling and telecommunications; buildings for such installations or plants; track brakes; plants for transformation and transmission of electric energy for train traction: 110 kV two-phase transmission lines, sub-stations except for 110 kV distribution switchgear in such substation, supply cables between substations and contact wire, catenary and girders, third rail with beams, lighting installation for traffic and safety needs, service points' buildings and other facilities on trackside land used for regulation of railway traffic including the part of the equipment for calculation and charging of transport charges and buildings for railway infrastructure maintenance, accesses for passengers and goods, including road access and access to passengers for arrival and departure of pedestrians, track-side land and the airspace above the track, 12 m high, i.e. 14m high at over 220kV overhead power lines, measured from the top of rail.

The Network Statement is a document that contains all the information in accordance with the Law on Railways of the Republic of Serbia ("Official Gazette of the RS" No. 41/18 and 62/23).

The document is compliant to all the norms set forth under the guidelines provided by the association RailNetEurope (hereinafter RNE) and shall be used as informative material for the interested railway undertakings. Moreover, the Network Statement has been harmonized with relevant EU Directives.

Network Statement provides general information on railway network, terms and conditions for access to railway infrastructure, principles and criteria for allocation of capacities, principles for charge calculation and their amounts, procedures for dispute resolution and other important details for usage of services provided to railway undertakings.

Infrastructure Manager Basic Information

Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade (hereinafter: Company) was founded with the Decision on founding of Joint Stock Company for Public Railway Infrastructure Management ("Official Gazette of the RS", no.60/15 and 73/15) and registered in the registry of Serbian Business Registers Agency, under the number BD 69692/2015 from August 10, 2015.

The founder of the Company is the Republic of Serbia, as the sole stakeholder of the Company, of behalf of which the founder's right is enforced by the Government of the Republic of Serbia, Belgrade, Nemanjina 11, company number 07020171. The Company is under the jurisdiction of the Ministry of Construction, Transport and Infrastructure.

Business company name: Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade

Abbreviated Company Name: "Infrastructure of Serbian Railways" JSC



Company Headquarters is in Belgrade, and the address of company's headquarters is 6 Nemanjina, Belgrade.

The main activity of company is "Service activities in land transport", activity code is 5221.

Company Reg. No is 21127094, TIN 109108420.

Company Business Accounts are 205-222959-26 and 160-438771-53.

The main activity of the Company includes: Service activities in land transport. The activity includes the management of public railway infrastructure in the segment of maintenance of public railway infrastructure, organization and control of railway traffic, provision of access and use of public railway infrastructure to all interested railway undertakings and protection of public railway infrastructure. The company performs the activity of general interest in accordance with the law. The company may also perform other activities in accordance with the law. The company performs the activities and services in domestic and international trade in accordance with the law.

Responsible persons: Acting General Manager Jelena Tanasković Tel.: +381 11 3618 330 kabinet.infrastruktura@srbrail.rs

Infrastructure Manager Organisational Chart

The organizational structure of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade is based on the Rulebook on organization and systematization of operations of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade.

Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways", Belgrade, (hereinafter: the Company), in order to perform the activities of management of public railway infrastructure, is organized according to the groups of operations, as follows:

- organization and control of railway traffic,
- maintenance of railway infrastructure,
- economic affairs,
- investments.
- human resources and common affairs, and
- operations that are organizationally related to the General Manager's Office.

The Company operations are performed within its departments, divisions, sections, units, technical-technological divisions, stations and operational sections and other lower organizational forms.

The management of public railway infrastructure includes the maintenance of public railway infrastructure, the organization and control of railway traffic, the provision of access and use of public railway infrastructure to all interested railway undertakings, the protection of public railway infrastructure, as well as the performing of investor function in construction and reconstruction of public railway infrastructure.

The following operations are also performed within the Company: traffic engineering, civil engineering and electrical engineering operations, development, investment and project management operations, as well as common affairs: financial, planning and analysis operations, restructuring and cooperation with international financial institutions, accounting, public procurement and warehousing operations, human resources management, occupational health and safety, operations related to property and inventory-taking, information technologies implementation and development operations, internal safety, international affairs and ethic's operations. Furthermore, in order to implement the operative, professional and administrative functions within the Company, the operations which are organizationally related to the General Manager's Office are also performed.



The operations referred to in the previous paragraph are performed within:

- 1. Traffic Department,
- 2. Railway Infrastructure Access Department,
- 3. Centre for Relief Train Operations,
- 4. Centre for Infrastructure Technical Monitoring,
- 5. Civil Engineering Department,
- 6. Electrical Engineering Department,
- 7. Finance Department,
- 8. Accounting Department,
- 9. Centre for Planning, Analysis and Restructuring,
- 10. Procurement and Central Warehousing Department,
- 11. Development Department,
- 12. Investment Department,
- 13. Department for Management of EU-Funded Projects (PIU).
- 14. Human Resources and General Affairs Department,
- 15. IT Department,
- 16. Centre for Security,
- 17. Real Estate Department,
- 18. Inventory-Taking Department,
- 19. Centre for International Affairs,
- 20. Ethic's Office,
- 21. Company's Management Secretariat,
- 22. Legal Department,
- 23. Centre for Internal Audit,
- 24. Centre for Internal Control,
- 25. Centre for Safety Management System,
- 26. Media Centre,
- 27. Centre for Railway Infrastructure Testing and Diagnostics.

The Organizational Chart of "Infrastructure of Serbian Railways" JSC is provided in Appendix 1.

Contact details

"Infrastructure of Serbian Railways" JSC contact details are the following:

Acting General Manager

Jelena Tanasković

Tel.: +381 11 3618 330

kabinet.infrastruktura@srbrail.rs

Traffic Department

Nemaniina 6

11000 Belgrade, Serbia

Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.sp@srbrail.rs

Railway Infrastructure Access Department

Nemanjina 6

11000 Belgrade, Serbia

Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs



Civil Engineering Department Nemanjina 6 11000 Belgrade, Serbia Tel: +381 11 3618 248

Fax: +381 11 3616 874 infr.sektorzagp@srbrail.rs

Electrical Engineering Department

Nemanjina 6

11000 Belgrade, Serbia Tel: +381 11 3618 241 Fax: +381 11 3618 130

etp@infrazs.rs

Centre for Relief Train Operations

Nemanjina 6

11000 Belgrade, Serbia

Tel.: +381 11 3620 899 Fax: +381 11 3620 899 direktor.tkp@infrazs.rs

Procurement and Central Warehousing Department Nemanjina 6 11 000 Belgrade, Serbia Tel.:+381 11 3620 094

Finance Department Nemanjina 6 11 000 Belgrade, Serbia

nabavke.infra@srbrail.rs

Tel.: +381 11 3618 465 Fax: +381 11 3618 465 finansijeizs@srbrail.rs

1.2 Purpose of the Network Statement

The purpose of this Network Statement is provision of single source basic information to the users of services provided to railway undertakings on the railway infrastructure operated by IŽS.

The Network Statement is a document which sets out the detailed general rules, deadlines, procedures and criteria related to the manner of calculation of charges and allocation of infrastructure capacities, including other relevant information necessary for submitting the request for infrastructure capacity allocation.

The Network Statement will be published on the web site of "Infrastructure of Serbian Railways" JSC, www.infrazs.rs, and the decision on its adoption will be published in the "Official Gazette of ŽS".

1.3 Legal Aspects

The functioning of infrastructure and traffic on the network operated by "Infrastructure of Serbian Railways" JSC is regulated by:

- legislation of the Republic of Serbia,
- formal documents of the Infrastructure Manager "Infrastructure of Serbian Railways" JSC,
- formal documents and technological procedures of the railway undertakings falling within the scope indicated in the above legislation.



1.3.1 Legal Framework

Regulations of the Republic of Serbia

Regulations of the Republic of Serbia of particular importance to this Network Statement include the following documents:

- Law on Railways ("Official Gazette of the RS", No. 41/18 and 62/23);
- Law on Interoperability of Railway System ("Official Gazette of the RS", No. 62/23);
- Law on Safety in Railway Traffic ("Official Gazette of the RS", No. 41/18")
- Regulation on Categorization of Railway Lines that belong to Public Railway Infrastructure ("Official Gazette of the RS", No. 92/20, 6/21, 33/22 and 63/23);
- Rules on Railway Infrastructure Elements ("Official Gazette of the RS", No.30/19);
- Rules on the Timetable ("Official Gazette of the RS", No. 58/19 and 1/2020);
- Regulation on Methodology for Valuation of the Elements for Determining the Level of Charge for the Use of Railway Infrastructure ("Official Gazette of the RS", No. 122/14);
- Rules on the Manner of Transport and Mandatory Operational Monitoring of Dangerous Goods Carried by Rail, as well as on the Obligations of the Participants in the Transport of Dangerous Goods by Rail and Emergencies ("Official Gazette of the RS", No. 81/15);
- Rules on training programme and method of knowledge checking of employees and of participants of dangerous goods transport in the railway transport, as well the manner in which the documentation is processed and their training ("Official Gazette of the RS", No. 81/15);
- Law on Transport of Dangerous Goods, passed by the National Assembly of the Republic of Serbia ("Official Gazette of the RS", No. 104/2016-34, 83/2018-57, 95/2018-389 (other law), 10/2019-13 (other law));
- Rules on Mandatory Elements of the Contract on the Use of Railway Infrastructure ("Official Gazette of the RS", No. 8/2019);
- Rules on Special Loads Transport ("Official Gazette of the RS", No. 74/19);
- Regulation on the Manner of Conclusion and Content of Framework Agreements for Allocation of Railway Infrastructure Capacity ("Official Gazette of the RS" No. 74/19);
- Regulation on Particularities of Procedures and Criteria Applicable to Access to the Services Provided in Service Facilities ("Official Gazette of the RS" No. 57/19 and 13/20);
- Rules on the Elements of Service Facility Information ("Official Gazette of the RS" No. 66/19).

International Regulations

When using the allocated train path, the railway undertaking must abide by all legal norms contained in the sources of international law (Convention concerning International Carriage by Rail (COTIF), its annexes, agreements and protocols governing the cross-border railway traffic and border control, UIC standards and any other relevant international regulations) as well as in the national laws and bylaws.

Formal documents of the Infrastructure Manager

Internal regulations (formal documents) and technological procedures of the Infrastructure Manager are listed in Appendix 2.



1.3.2 Legal Status and Liability

The Network Statement is based on the legal framework defined in section 1.3.1. In case of any ambiguities or legal proceedings, the relevant provisions of the legislation of the Republic of Serbia will apply.

The present Network Statement has been developed on the basis of the information available at the moment of drafting thereof. IŽS is liable for accuracy of the information given in the present Network Statement. All regulations and technical documentation which become effective upon publishing of this Network Statement shall apply and shall be taken into consideration on the occasion of construing this Network Statement.

IŽS is not liable for the accuracy of data published herein, which are submitted by the service facility operators.

1.3.3 Appeals Procedure

Appeals procedure in respect of the Network Statement, and in respect of other formal documents of the Infrastructure Manager relating to the path allocation procedure and use of railway infrastructure, is governed by the Law on Railways.

The function of the regulatory body for the railway sector is performed by the Directorate for Railways (hereinafter: the Directorate), as a separate organization which runs the railway-specific state administration affairs as set forth in the Law on Railways.

The scope of the Directorate for Railways has been set out in Articles 118-129 of the Law on Railways ("Official Gazette of the RS" No. 41/2018 and 62/23) and by the provisions of the Law on Safety of Railway Transport ("Official Gazette of the RS" No.41/2018).

Article 120 of the Law on Railways provides that the Directorate is in charge of the following:

- regulation of railway services market;
- licensing of railway undertakings;
- passenger rights;
- safety in railway traffic and interoperability of railway system;
- cableway;
- realization of international cooperation within its scope of competence;
- other tasks in accordance with this law and other laws governing the area of safety in railway transport, interoperability of railway system and cableways for transport.

The applicant for train path allocation may lodge a complaint with the Directorate for Railways against the decision made by the Infrastructure Manager to reject its application for path allocation or against the established conditions for supply of infrastructure capacity, and also when it is not satisfied with the train path allocation procedure and its outcome, subject to payment of a fee in the amount of administrative fee charged for the appeals to the authority.

As a regulatory body, the Directorate deliberates, in the segment of regulation of railway services market, on the complaints lodged by applicants for train path allocation, especially taking into account any potential unfair treatment or discrimination by the Infrastructure Manager or railway undertakings, in connection with:

- (1) the Network Statement,
- (2) the criteria set out in the Network Statement,
- (3) the train path allocation procedure and its outcome,
- (4) the method for determining the charge for the use of train path;
- (5) the level or structure of charges for the use of train path which it is or may be obliged to pay,
- (6) information about service facilities;



(7) the application of provisions of article 13 of the Law on Railways and particularly of access and charges.

The decision of the Directorate is final. The appeal against it may be lodged with the Administrative Court within 30 days of its receipt.

1.4 Structure of the Network Statement

The structure of 2025 Network Statement is in accordance with the general structure for network statements of the European Railway Association (RailNetEurope association) which is applied by most infrastructure managers in Europe in the process of network statement preparation.

The general structure of Network Statement is reviewed as necessary and the latest version is available on the RNE's web-site. The objective of general structure is that all applicants and interested parties may find the same information at the same place in the Network Statement.

The Network Statement consists of 7 chapters that make up the basic document and a series of attachments that contain additional information.

Table No 1. Network Statement Structure

No	Chapter	Description
1.	General information	Contains the general information about Network Statement and contacts
2.	Infrastructure	Contains the description of the network operated by JSC "Infrastructure of Serbian Railways" (IŽS)
3.	Access conditions	Provides a specification of conditions, which will be met by the railway undertaking, prior to gaining the track access
4.	Capacity allocation	Provides the principles and criteria for infrastructure capacities allocation
5.	Services and charges	Provides an overview of services provided by "Infrastructure of Serbian Railways" JSC and charges
6.	Operations	Contains operational rules
7.	Service facilities	Provides an overview of service facilities connected to rail network operated by IŽS

1.5 Validity Period, Updating and Publishing

1.5.1 Validity Period of the Network Statement

This Network Statement shall be valid during the timetable validity period, from December 15th, 2024 to December 13th, 2025.

The Network Statement shall be published not later than two months prior to the commencement of the final deadline for submission of applications for path allocation and shall remain valid during the entire timetable validity period.

1.5.2 Updating Process

The Network Statement will be updated in case of change of important pieces of information published in the Network Statement. Any amendment to the Network Statement will be published separately in the "Official



Gazette of Serbian Railways", whereas the updated (amended) Network Statement will be published on the "Infrastructure of Serbian Railways" JSC website.

1.5.3 Publishing, Distribution and Availability of the Network Statement

The Network Statement will be published on the "Infrastructure of Serbian Railways" JSC website (www.infrazs.rs), both in Serbian and English languages.

If so requested by a railway undertaking, "Infrastructure of Serbian Railways" JSC may provide the Network Statement or a part of it, free of charge, in electronic format.

1.6 Contacts

Contacts relevant for information contained in the Network Statement:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6, Nemanjina St. 11000 Belgrade Serbia Tel.: +381 11 3618 214

Fax: +381 11 3616 814 sektor.pzi@srbrail.rs

1.7 Cooperation Between European IMs/ABs

1.7.1 Rail Freight Corridors

The Pan-European Corridor X from Salzburg in Austria to Thessaloniki in Greece stretches via the infrastructure network of "Infrastructure of Serbian Railways" JSC. On the territory of the Republic of Serbia, on the network of "Infrastructure of Serbian Railways" JSC, Corridor X includes the following railway lines from Šid to Preševo:

- Belgrade Šid State border,
- Belgrade Mladenovac Niš,
- (Belgrade) Rakovica Jajinci Mala Krsna Velika Plana,
- Niš − Preševo − State border.

The following branches connect to the primary route of the Corridor:

- Xb, (Budapest) Novi Sad Belgrade (railway line (Belgrade) Stara Pazova Subotica), and
- Xc, Niš Dimitrovgrad (Sofia Istanbul) (railway line Niš Dimitrovgrad State border).

Infrastructure of Serbian Railways is a member of Railway Freight Corridor Alpine-Western Balkans (RFC 10). The corridor connects five countries: Austria, Slovenia, Croatia, Serbia and Bulgaria. The corridor route goes from Svilengrad in Bulgaria, via Sofia, Belgrade, Zagreb to Zidani Most in Slovenia, where the route branches off to two routes via Maribor, Gratz to Wels and via Ljubljana, Villach to Salzburg. The corridor covers 2,114 km of main lines and 31 km of connecting lines. There are 21 intermodal terminals and 12 marshalling yards on the corridor.

More details on the corridor are available on its website https://www.rfc-awb.eu/.

1.7.2 RailNetEurope

RailNetEurope association (hereinafter RNE) was established in January 2004 by virtue of an agreement between 12 Infrastructure Managers from the entire Europe, and their number is constantly rising.



Through its members, RNE operates over 230,000 km long railway lines, including the important ferry lines, and cooperates with more than 120 railway undertakings in international traffic and with more than 300 railway undertakings that, for the time being, operate only in the domestic traffic of the members.

The main efforts are put towards enhancing the access conditions and performance of international railway transport, particularly with respect to operability. To achieve this, RNE is focused on the overall process of international transport operations. It starts with harmonization of mid-term and long-term planning of particular members, joint marketing and sales approach, appropriate planning and operation, and ends with provision of services after transport has been performed, such as monitoring, control and assessment of performed transport.

One of the first steps towards progressive harmonization was creation of a structure model for the preparation of Network Statement, applied by all RNE members.

One of the most important RNE steps was creation of an international network of One Stop Shop offices.

The list of all RNE members and further information on this association may be found at www.railneteurope.com.

"Infrastructure of Serbian Railways" JSC is a full member of the association from April 21, 2016.

One Stop Shop - OSS

Infrastructure Managers have opened national One Stop Shop (OSS) offices that jointly make up a network of contact points for the users within the RNE. As regards the international path allocation applications, the users only need to contact one of these OSSs that will initiate the entire process of international path allocation.

In close cooperation with other IMs, the contacted OSS will:

- offer support and information to undertakings on the entire range of Infrastructure Managers' products and services along the whole route;
- provide all information on the conditions for access to the infrastructure of any Infrastructure Manager within the RNE;
- process the applications for international path allocation within the RNE;
- make sure that all the applications for the next year's Timetable are timely taken into account during preparation of the annual Timetable;
- provide offers for railway paths on the entire route in international traffic.

In accordance with its motto "one face to the customer", the OSS provides professional and efficient assistance via all border crossings, underpinned by transparent procedures based on trust and non-discrimination. The list of contacts by member countries is available at www.railneteurope.com.

"Infrastructure of Serbian Railways" JSC, as a RNE member, conducts intensive activities on defining the procedures so as to implement the OSS in the near future in the railway sector of the Republic of Serbia.

RNE tools

Since 2005, the RNE has taken over the full responsibility for preparation of the international timetable and the support to its activities; it operates the following information systems: for path coordination - PCS (Path Coordination System), for charging - CIS (Charging Information System) and for train information - TIS (Train Information System).

PCS



PCS (Path Coordination System) – is an international path request coordination system for path applicants i.e. railway undertakings, infrastructure managers and allocation bodies. This web-based application optimises international path coordination by ensuring that path requests and offers are harmonised by all involved parties. The input for international path requests needs to be entered only once into the system – either via the domestic application or directly into the PCS. More information is available on: http://pcs.RNE.eu/.

CIS

CIS (Charging Information System) – is an infrastructure charging information system for railway undertakings, infrastructure managers and allocation bodies. This web-based application provides fast information on charges related to the use of the European rail infrastructure and estimates the charge for the use of international train paths within minutes. This is an umbrella application for various national rail infrastructure charging systems. More information is available on: http://cis.RNE.eu/.

TIS

TIS (Train Information System) – is a web-based application which manages the operation of international trains by delivering information on movements of international passenger and freight trains in real time. These data are obtained directly from the system. More information is available on: http://tis.RNE.eu/.



2. INFRASTRUCTURE

2.1 Introduction

The purpose of this section is to provide the information on the railway infrastructure owned by the Republic of Serbia and managed by IŽS, to provide the description and overview of the characteristics of the railway lines and appertaining facilities and equipment that can be used by all those to whom the access to and use of infrastructure have been granted in accordance with the provisions of the Law on Railways. Other information on the IŽS network can be found on the website www.infrazs.rs.

Information on the railway infrastructure published in this document is based on the facts that were familiar at the time of its preparation. All changes occurring after publishing of this document will be updated on the website www.infrazs.rs.

2.2 Extent of Network

The total structural length of standard-gauge lines on the territory of "Infrastructure of Serbian Railways" JSC network amounts to 3348.1 km, out of which 3059.4 km of single-track and 288.7 km of double-track lines. The above-mentioned line length includes 1744.4 km of main lines and 1603.7 km of other lines. The total of 1301.9 km of open tracks have been electrified, together with main running tracks (1013.2 km of single-track and 288.7 km of double-track lines).

The total length of electrified lines - open tracks and main running tracks is 1,592 km. All the above data relate to standard-gauge 1435 mm tracks. More detailed information is available in Appendix 6.

In addition, "Infrastructure of Serbian Railways" JSC also operates the museum-tourist railway line - "Shargan Eight" - which is 22.5 km long and whereof track gauge is 760 mm.

2.2.1 Limits

In terms of ownership and management of public railway infrastructure, there is only one railway network in the Republic of Serbia and this is a state-owned network, managed by IŽS. Therefore, the term "limit" also means state borders which at the same time represent borders with the neighbouring railway networks.

The IŽS railway network borders with the neighbouring railway networks are the following border stations: Subotica, Horgoš, Kikinda, Vršac, Bogojevo, Šid, Brasina, Preševo, Đeneral Janković, Vrbnica and Dimitrovgrad.

Upon crossing of state borders, the track gauge remains unchanged.

The type of traction is changed only at the border crossing with the Republic of Bulgaria, at Dimitrovgrad station on the railway line Niš-Dimitrovgrad-State Border.

2.2.2 Connecting Railway Networks

The railway network of the Republic of Serbia is connected with the railway networks of the following seven countries: Croatia, Hungary, Romania, Bulgaria, North Macedonia, Montenegro and Bosnia and Herzegovina. Traffic can be organized via ten border crossings, while one border-crossing is under the control of UNMIK.

For more detailed information please refer to Table No 2. The names of neighbouring countries' stations in the table are given in authentic form, as registered in the official timetables.

The term joint border station means a border station in which border control is jointly performed by the competent state authorities, as well as traffic handover between the railway undertakings. Joint border stations are governed by bilateral state agreements. Performing of traffic handover in other border stations is within decision —making domain and agreement between the railway undertakings.



Table No 2. Border crossings, border railway lines and border stations

	Neighbouring country	Border railway lines	Border stations	Neighbouring infrastructure managers	Note
	Croatia	Šid-State Border -Tovarnik	Šid Tovarnik	HŽI	
1	Croatia	Bogojevo-State Border- Erdut	Bogojevo Erdut	HŽI	
2	Hungany	Subotica-State Border- Kelebija	Subotica Kelebia	MAV Zrt	
2	Hungary	Horgoš-State Border- Roszke	Horgoš Roszke	MAV Zrt	
3	Romania	Vršac- State Border - Stamora Moravita	Vršac Stamora Moravita	CFR SA	
		Kikinda-State Border- Jimbolia	Kikinda Jimbolia	CFR SA	
4	Bulgaria Dimitrovgrad-State Bo Dragoman		Dimitrovgrad Dragoman	NKŽI	Joint border station Dimitrovgrad
		Preševo- State Border Tabanovci	Preševo/ Ristovac Tabanovci	IŽRSM	Joint border station Tabanovci
5	North Macedonia	Đeneral Janković - State Border -Volkovo	Đeneral Janković	IŽRSM	Temporary under the supervision of UNMIK Railways
6	Montenegro	Vrbnica - State Border – Bijelo Polje	Vrbnica / Prijepolje freight Bijelo Polje	ŽICG	Joint border station Bijelo Polje
7	Bosnia and Herzegovina	Brasina - State Border – Zvornik Novi	Brasina Zvornik Novi	ŽRS	

Within the national network, the public railway infrastructure operated by IŽS is connected with other railway infrastructures in the Republic of Serbia. The sidings of Elektroprivreda Srbije and HBIS Group Serbia Iron & Steel" d.o.o. are connected to IŽS national railway network.

These sidings are used for transport of goods for own needs (industrial railways) and they do not belong to the national railway network.

Railway infrastructure operated by IŽS is also connected with a number of railway industrial sidings owned by the business entities.

For other information on railway infrastructure operated by IŽS, which are not contained and presented herein, please contact IŽS at the following address:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St., 11000 Belgrade, Serbia

Phone.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs



2.3 Network Description

2.3.1 Geographic data and types of railway lines

General network information is given in Table No. 3.

Table No 3. Structural length of the lines within the network

Total network length	3 348.1 km
Single-track lines	3 059.4 km
Double track lines	288.7 km
Narrow-gauge lines	22.5 km*
Non-electrified lines	2 046.2 km
Electrified lines	1 301.9 km

^{*} Narrow-gauge line Šargan Vitasi – Mokra Gora – State Border (Višegrad)

Types of railway lines

Pursuant to the Regulation on categorization of railway lines that belong to public railway infrastructure ("Official Gazette of the RS", No. 92/20, 6/21, 33/22 and 63/23) applied by the "Infrastructure of Serbian Railways" JCS, railway lines are classified as main lines, regional lines, local lines, shunting lines and museum-tourist lines.

Pursuant to the law governing the railways, railway lines are classified as follows:

- 1. main lines- of importance to international and domestic service;
- 2. regional lines of importance to regional and local service;
- 3. local lines of importance to local service;
- 4. shunting lines of importance to business entities,
- 5. museum-tourist railway lines.

Main lines with associated line number are:

- 101 Belgrade Centre-S. Pazova-Šid-State border-(Tovarnik);
- 102 Belgrade Centre Junction "G"- Rakovica-Mladenovac-Lapovo-Niš-Preševo-State border-(Tabanovce);
- 103 (Belgrade Centre)- Rakovica-Jajinci-M.Krsna-V.Plana;
- 104 (Jagodina) Ćuprija Junction Ćuprija-Paraćin;
- 105 (Belgrade Centre)-S.Pazova-N.Sad-Subotica-State border-(Kelebia);
- 106 Niš-Dimitrovgrad-State border-(Dragoman);
- 107 Belgrade Centre-Pančevo Main St.-Vršac- State border-(Stamora Moravita);
- 108 (Belgrade Centre)-Resnik-Požega-Vrbnica- State border-(Bijelo Polje);
- 109 Lapovo-Kraljevo-Lešak-Kosovo Polje-Djeneral Janković- State border-(Volkovo);
- 110 Subotica-Bogojevo-State border-(Erdut);
- 111 Belgrade Marshalling Yard "A"-Ostružnica-Batajnica;
- 112 Belgrade Marshalling Yard "B"-Ostružnica;
- 113 Belgrade Marshalling Yard "A"-Junction "B"- Junction "K/K1"-Resnik;
- 114 Ostružnica-Junction "B"-(Junction "K/K1");
- 115 Belgrade Marshalling Yard "B"-Junction "R"- Junction "A"-(Resnik);
- 116 (Belgrade Marshalling Yard "B")-Junction "R"-Rakovica;
- 117 Belgrade Marshalling Yard "A"-Junction "T"-Rakovica;
- 118 Belgrade Marshalling Yard "B"-Junction "T"-(Rakovica);
- 119 Connecting track in the area of Junction "K/K1": (Junction "B")--Points "K"-Points "K1"-(Jajinci);
- 120 (Junction Pančevo Most)-Junction Karadjordjev park-Junction Dedinje-(Junction "G");
- 121 Indjija-Golubinci;
- 122 Novi Sad-Novi Sad Marshalling Yard-Junction Sajlovo;
- 123 By-pass track at the station Mala Krsna: (Kolari)-Junction points 1-Junction points 28-(Osipaonica);
- 124 Junction Lapovo Varoš-Lapovo Marshalling Yard-Lapovo;
- 125 Trupale-Niš Marshalling Yard-Medjurovo;



- 126 Crveni Krst-Niš Marshalling Yard;
- 127 Niš-Junction Most-(Niš Marshalling Yard);
- 128 Connecting track at the station Niš: (Crveni Krst)-Junction points 3-Junction points 4-(Ćele Kula).

Regional lines with associated line number are:

- 201 Subotica-Horgos-State border-(Roszke);
- 202 Pančevo Main St.-Zrenjanin-Kikinda-State Border-(Jimbolia);
- 203 Belgrade Donji Grad (km 7 + 041) Belgrade Danube Junction Pančevo most¹;
- 204 Topčider Passenger Station (km 4 + 195) Junction "G" (Rakovica)²;
- 205 Banatsko Miloševo-Senta-Subotica;
- 206 Pančevo Varoš-Junction "2a"-(Jabuka);
- 207 Novi Sad-Odžaci-Bogojevo;
- 208 (Novi Sad)-Junction Sajlovo-Rimski Šančevi-Orlovat stop;
- 209 Novi Sad Marshalling Yard Junction points 7-Novi Sad Lokoteretna-Sajlovo Junction;
- 210 Orlovat- Junction "1a"-(Lukićevo);
- 211 Ruma-Šabac-Junction Donja Borina-State border-(Zvornik Novi);
- 212 (Platičevo)-Junction "1"-Junction "3"-(Štitar);
- 213 Stalać-Kraljevo-Požega;
- 214 Connecting track at the station Kraljevo: (Mataruška Banja)-Junction points 72-Junction points 73-(Adrani)
- 215 Connecting track at the station Požega: (Uzići)-Junction points 53-Junction points 54-(Dragačevo);
- 216 Smederevo Junction Jezava Radinac Mala Krsna;
- 217 Junction Jezava Smederevo Port;
- 218 Mala Krsna-Bor-Junction "2"-(Vražogrnac);
- 219 (Nis) Crveni krst-Zaječar-Prahovo Port;
- 220 (Rgotina)-Junction "3"-Junction "1"-(Trnavac);
- 221 (Barlovo)-Junction "1"-Kuršumlija;
- 222 Kuršumlija-Kastrat;
- 223 Doljevac-Kastrat-Merdare Kosovo Polje;
- 224 Kosovo Polje-Metohija-Peć;
- 225 Kosovo Polje Freight St.-Junc. "1"-(Drenica);
- 226 Vrbas Sombor.

Local lines with associated line number are:

- 301 Subotica-Subotica Factory;
- 302 Subotica-Subotica Hospital;
- 303 Novi Sad (km 1+042)-Novi Sad Ložionica;
- 304 (Podbara)-Junction "3"-Junction "2"-(Kać);
- 305 (Rimski Šančevi)-Junction "1"-Junction "3"-(Podbara);
- 306 Rimski Šančevi-Žabalj;
- 308 (Brasina)-Junction Donja Borina-Zvornik Grad;
- 309 Pančevo Varoš-Pančevo Vojlovica;
- 310 Connecting track at the station Senta: (Čoka)-Junction points 22-Junction points 23-(Orom);
- 311 Markovac-Svilajnac-Despotovac- (Resavica);
- 312 Metohiia-Prizren:
- 313 Vršac Bela Crkva.

¹ By virtue of the Conclusion adopted by the Government of the Republic of Serbia No 340-2986/2022 dated April 7th, 2022, the Decision of the Shareholders' Meeting of Infrastructure of Serbian Railways JSC on termination of railway line Belgrade Donji Grad (km 7+041) – Belgrade Danube – Junction Pančevo Most has been approved.

² By virtue of the Conclusion adopted by the Government of the Republic of Serbia No 340-2989/2022 dated April 7th, 2022, the Decision of the Shareholders' Meeting of Infrastructure of Serbian Railways JSC on termination of public railway service, dismounting and reconstruction of infrastructure capacities on railway line Topčider Putnička (km 4 + 195 – Junction "G" – (Rakovica) has been approved.



_

Shunting lines with associated line number are:

```
401 Vršac-Vršac Vašarište:
```

402 Kikinda-Metanolsko sirćetni kompleks(km 6+413);

403 Bogojevo-Dunavska Obala;

404 Paraćin-Stari Popovac;

405 Surčin-Jakovo-Bečmen:

406 Šid-Sr.Rača Nova-State Border-(Bijeljina);

407 Ovča-Padinska Skela:

408 Sonta – Apatin factory;

409 Bačka Palanka - Gajdobra

Museum-tourist line with its associated number is:

501 Šargan Vitasi – Mokra Gora – State Border (Višegrad).

Due to the technical condition of particular local and shunting lines, traffic is no longer possible on such lines and is currently completely or partially suspended. More details can be found in Appendix 6.

The following IŽS lines belong to main international railway lines according to AGC (European Agreement on Main International Railway Lines):

<u>Direction North – South</u>

E 771 Subotica-Bogojevo

E 79 Belgrade - Vrbnica

E 85 Subotica-Belgrade-Niš-Preševo

-Kraljevo-Djeneral Janković

Direction West - East

E 66 Belgrade-Vršac

E 70 Šid-Belgrade-Niš-Dimitrovgrad

2.3.2 Track Gauges

Track gauge along the network is 1435 mm, except for the museum-tourist line the "Shargan Eight", whose gauge is 760 mm.

2.3.3 Stations and Nodes

Names, km-points and distances in km between particular service points and railway nodes are given in Appendix 6 and Appendix 10.

2.3.4 Loading Gauge

Loading gauge is a limited space viewed as a cross section vertical to the track axis that may not be exceeded by any part of the rail vehicle, whether loaded or empty. The loading gauge registered for all IŽS lines for international traffic is UIC GB, except for parts of the railway lines Valjevo – Kalenić and Grlica - Djeneral Janković, where the registered loading gauge is UIC GA. These loading gauges are in line with the UIC Leaflet 506.

The loading gauge that applies to domestic traffic on IŽS lines is ŽS I. The ŽS I gauge is slightly larger than the UIC GA loading gauge and slightly smaller than UIC GB. The summary of loading gauges is presented in Appendices 3.1.-3.3.

IŽS lines have not been coded for the combined transport gauges in accordance with UIC Leaflet 596-6. However, the measurements that were performed have shown that movements of wagons carrying combined transport load units - such as high cube containers (HCC), semi-trailers and entire road vehicles - are



possible. Movements of such consignments are possible under special safety conditions in the exceptional transport regime.

For further information, please contact IŽS:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina St. 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 E-mail: sp@infrazs.rs

2.3.5 Weight Limits

In accordance with UIC Leaflet 700, depending on track capacity to bear loads by vehicles on the railway network, various weight limits are applicable and expressed in tonnes per axle and tonnes per linear metre.

The load by a railway vehicle per linear metre is the load of an unloaded or loaded railway vehicle divided by the length of the railway vehicle expressed in metres and measured between tops of uncompressed buffers.

Axle load of a railway vehicle is the load of an unloaded or loaded railway vehicle divided by the number of axles of the railway vehicle.

Based on the above-stated, railway lines were classified into categories (Regulations on classification of railway lines No. 325, published in the Official Gazette of the Community of Yugoslav Railways (ZJŽ) Nos. 7/89 and 9/90). The classification of IŽS railway lines is shown in Table No. 4.

Table No 4: Categories of admissible loads on IŽS network

Admissible	looda		Admissible loads per axle			
		per	A	В	С	D
linear metre		16 t	18 t	20 t	22,5 t	
1	5.0 t/m		A	B1		
2	6.4 t/m			B2	C2	D2
3	7.2 t/m				C3	D3
4	8.0 t/m					D4

The overview of admissible loads in tonnes per axle and in tonnes per linear metre is presented in Appendix 6.

2.3.6 Line Gradients

In order to determine required train braked weight, the ruling gradients for braking must be determined for each line or track section. The ruling line gradient for braking means the value of its longitudinal gradient, on the basis of which braked weight percentages are determined, i.e. the required train braked weight on a certain line or track section. The longest longitudinal gradient (rising or falling) on a specific line (or section), over the length of 1000 metres or more, is considered to be the ruling gradient of that specific line or section. In determining the ruling gradient for braking, the curve and tunnel related resistances are not taken into consideration.

The ruling resistance of a line or one of its sections means the value of its specific resistance due to gradient, curve and tunnel, on the basis of which train weight i.e. locomotive hauled load is determined.



The overview of ruling gradients and ruling resistances of particular lines is presented in Appendix 6.

2.3.7 Maximum Line Speeds

The maximum permissible speed with respect to line capacity is the maximum speed permitted on a line or line section with respect to the railway line superstructure and its structures (carrying capacity of the track, its lining and levelling, curve radius, points design, etc.), fixed electric traction installations and signalling and interlocking devices on the line, and it may not exceed the lowest one of such speeds.

Restricted speeds are permanently prescribed speeds that are lower than the maximum permissible speed on the railway line and that are applied on a certain section of the railway line due to its technical condition or that are applied while running in the points area.

For further information on maximum permissible speeds and restricted speeds with respect to line capacity, please refer to Appendix 6.

2.3.8 Maximum Train Lengths

The length of each train is determined during the capacity allocation procedure and it is expressed in rounded metres. The maximum permissible length of a train operating on a line, for the purposes of its smooth acceptance and forming in railway stations, at passing points and other service points, is determined on the basis of the maximum permissible train length in certain stations, passing points and other service points along the given line and with respect to usable length of main lines.

Maximum permissible length of a train for station tracks is obtained by subtracting the length of 25 m to be taken up by the locomotive and spare 10 m to be taken up by the train, from the usable track length expressed in metres and determined under the Instructions (Instructions on the technical standards and data for the preparation of timetable implementation, "Official Gazette of ZJŽ Nos. 9/89, 6/91, 8-9/91, 4/92, and 9/92).

Actual length of a train is obtained by totalling the lengths over uncompressed buffers of all vehicles included in the train, except for the locomotive hauling the train, whose length has been taken into account during determination of maximum permissible train length at a station. If a train has double heading, banking locomotive or intermediate-haul locomotive, their lengths must be taken into account when determining the train length.

The overview of distances between the service points and maximum permissible train lengths relative to usable track lengths is presented in Appendix 6.

The provisions of paragraph 2 of this article shall also apply to the length of the passenger train. The passenger train may be longer than the length of the platforms and arranged areas in service points, and if the railway undertaking requires their dwelling in such service points, it must set and ensure the necessary safety measures for passengers in accordance with local and/or other specific circumstances. The overview of platforms and arranged areas in service points is given in Appendix 8 and for further details, please contact IŽS:

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St. 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.pzi@srbrail.rs



2.3.9 Power Supply

IŽS ensures the transmission of required electric energy from the public power supply network of the Republic of Serbia via the fixed electric traction installations (substations) and the catenary for electric train traction. All electrified railway lines have the basic power supply system, which is single-phase AC 25 kV 50 Hz system. The overview of electrified railway lines is presented in Appendix 3.4. The overview of power supply installations is presented in Appendix 3.5.

The power supply system voltage is U=25 kV, and its frequency is f=50Hz. The height of the contact wire are Hkpmin=5000 mm, Hkpnom=5500 mm and Hkpmax=6000 mm. The staggering of the OCL is p= \pm 200 mm along the straight track, and p=300 mm in curves.

In the 25kV, 50 Hz power supply system, the use of pantograph (current collector) for electric motive power is permitted according to the General Contact Line Catalogue (type POS-III/E). The design of pantograph is shown in Figure No 1.

The basic parameters for the asymmetric pantograph used on IŽS network, with double contact strip and pneumatic actuator, are in accordance with the provisions of UIC Leaflet 608 and are shown in Table No 5.

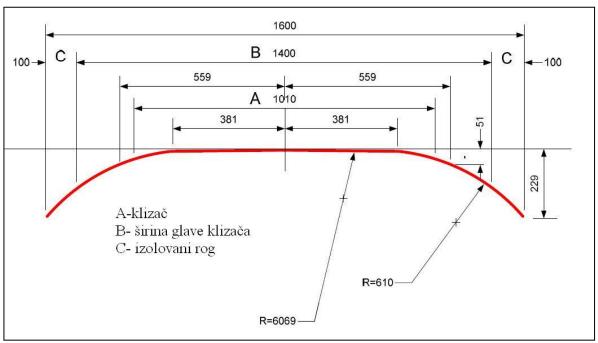


Figure No 1. – Dimensions of pantograph

Table No. 5: Pantograph parameters

Permissible width of horned slipper holder (mm)	Width of metal horns (mm)	Rated current (A)	Height of contact line (mm)	Minimum length of contact strip (mm)	Static force Fa (N	Maximum aerodynamic force Fa (N)	Maximum speed (km/h)	Type of contact strip
1600	1400	400	6200 5500 5000	800	60-90	70	160	graphite

2.3.10 Signalling Systems

Railway signals provide signals by means of which railway staff can mutually communicate in a fast and reliable way about train operation, shunting, permitted and forbidden runnings via a certain location, the



track condition, the need for speed restriction, etc. Some signals are used for preserving of personal safety of railway staff and other persons.

Regulations on types of signals, signal markings and track markings ("Official Gazette of the RS" No.50/20) are applicable to the use of signals and signal markings.

There are eleven types of station track interlocking on the network of "Infrastructure of Serbian Railways" JSC, and they are presented in Appendix 6.

On IŽS network, the main arterial routes are equipped with fully centralized electrical relay signalling & interlocking equipment, as follows:

- Belgrade Center-Niš-Preševo: Siemens SpDrS-64/JZ track circuit system,
- (Belgrade Center) Resnik-Vrbnica: Siemens SpDrS-64/JZ axle counter system,
- Stara Pazova Golubinci: Siemens SpDrS-64/JZ track circuit system,
- Golubinci-Ruma: Siemens SpDrS-64/JZ axle counter system,
- Ruma-Šid: Siemens SpDrS-64/JZ track circuit system,
- Novi Sad-Subotica: Westinghouse track circuit system.

In all stations on Belgrade Center – Novi Sad line section, new electronic signalling and interlocking devices type "DS6-60" with "MMI" electronic control and monitoring system have been installed. Within the upgrade performed on trackside and station electronic signalling and interlocking devices, all service points on Belgrade Center – Novi Sad line section have been included in the central traffic control and command system – remote control type "FZt – CTC".

The main arterial routes Šid- Golubinci – (Stara Pazova) – (Belgrade Center)-Niš-Preševo and Belgrade Center- Vrbnica are included in the system of remote traffic control and command – remote control centre (manufactured by Westinghouse). There are three remote control centres - in Belgrade, Požega and Niš. Based on this device, 3 remote control centres were set-up in Belgrade, Niš and Požega with the total of 133 controlled stations.

Dimitrovgrad Station (railway line Niš-Dimitrovgrad-State Border) is equipped with electronic signalling & interlocking device Simis-W with Iltis control & supervision system manufactured by Siemens.

In addition to the above-mentioned, Pančevo Main St. and Ćuprija stations are equipped with electronic signalling & interlocking devices.

Other railway lines are equipped with other above stated interlocking types, but there is no continuity as regards to one system of interlocking.

The overview of signalling and interlocking devices is presented in Appendix 3.6.

2.3.11 Traffic Control Systems

The movement of trains running in opposite directions and consecutive train movements are controlled by requesting and giving the permission i.e. announcement of arrival and departure.

Consecutive trains can follow one another only in particular space intervals. For the control of trains following one another in particular space intervals, railway lines can be divided into:

- Block sections between stations when two neighbouring stations control the sequence of trains in the station interspace,
- Train-recording sections when two neighbouring train-recording points or a station and a neighbouring train-recording point control the sequence of trains in announcement intervals,
- Block sections when the traffic of consecutive trains is controlled by automatic positioning of automatic block signals in the position of permitted or forbidden train ride.



In addition to space distance, in case of consecutive trains in train reporting and block intervals, there should be a time interval so as to avoid train stopping before automatic block signals due to different train journey times over block sections (time spacing).

On the railway lines of "Infrastructure of Serbian Railways" JSC there are also interstation interlocking devices (MZ) which regulate train traffic at distances between stations, where an interstation track occupation is reported by means of axle counters.

There can only be one train in one block section on the same track and at the same time.

Train operation is regulated by movements inspectors who uses the station signal boxes and along railway lines through remote control – by the remote control dispatcher from the central signal box, except at the stations that are not included in the remote control system. The traffic of trains running in opposite directions and consecutive trains is regulated by movements inspectors at manned stations and along the railway lines included in the remote control system it is regulated by remote control dispatchers.

"Infrastructure of Serbian Railways" JSC uses "Flexi code 560" remote control system on its territory, manufactured by Westinghouse. It uses semiconductor technology and a code system, and controls instruction completeness at the stages of forwarding and acceptance. It was developed as a standard format and it consists of a remote control centre, which can control 32 stations on one railway line and of one or more lines for data transfer, as well as the remote control equipment at stations (satellites).

Based on this device, 3 remote control centres were constructed in Belgrade, Nis and Pozega, with 140 controlled stations.

On Belgrade Center – Novi Sad line section , all service points are included in the central traffic control and management system – remote control center type FZt-CTC.

The train control system is governed by the Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22) and Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22).

The train control methodology is presented in Appendix 6.

2.3.12 Communication Systems

In the course of traffic operations, communication is carried out via telecommunication devices – telephone and ground-train radio links. Communication via means that provide reliable and continuous registration of notifications (teleprinter, telephone or radio link with registration devices) is considered to be verifiable communication. The notifications related to the control of train movements (permissions and instructions given to train crew via telephone or ground-train radio links) are furnished exclusively via devices for verifiable communication.

The communication between movements inspectors, remote control centre dispatchers and drivers is carried out in Serbian language.

All notifications are given in the format and manner set forth in the Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22), Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22) and Regulation on records kept by the railway undertaking and the railway infrastructure manager ("Official Gazette of the RS" no.56/19, 154/20 and 159/20).

The overview of telecommunication links and installations is presented in Appendix 3.7.

IŽS network uses analogue ground-train radio system (RDV) for transmission of specially coded voice information in the frequency range of 460 MHz and by using frequencies belonging to quadrifrequency



groups according to UIC Leaflet 751-3. The system operates in full duplex (modes A and B), with selective calling option including automatic identification and making special calls (group, intervention).

There is a possibility of integrating into local radio networks (mode C) and automatic telephone exchange. The devices were manufactured by AEG (now EADS telecom) in the '70s and the '90s.

On the lines with a dispatcher control system, the train operating staff is connected with the remote control centre dispatchers via mobile RDV units, which represent mandatory driver's cab equipment.

The GSM-R system enables voice communication and transmission of text messages within the ERTMS, i.e. for ETCS L2 and ETCS L3. The GSM-R system is installed on line section Belgrade Center – Novi Sad.

2.3.13 Train Control Systems

For the time being, there is no automatic train control system on the railway lines of "Infrastructure of Serbian Railways" JSC.

Intermittent transmission AS device (automatic train control) with resonant frequencies of 1000Hz and 2000Hz, type Indusi (I 60), is used for the control of train movements. It is comprised of:

- track magnet (stationary trackside part of the device)
- transmission system (inductive link between the track magnet and locomotive auto-stop device), and
- locomotive part installed on the traction unit.

Track magnets are installed on the right-hand side of the track, in the direction of train movement.

Functioning and operating of AS devices have been stipulated under the Operator's Manual for inductive I-60 AS devices (Instructions No 425), Instructions for installation, testing and putting into operation and maintenance of the locomotive part of I-60 AS device (Instructions No 426), and Instructions for use, installation, testing and maintenance of trackside AS devices on the lines of Yugoslav Railways (Instructions No 427).

The overview of the lines equipped with AS device is presented in Appendix 3.6.

The ERTMS is the European Rail Traffic Management System. The ETCS is a part of ERTMS. On Belgrade Center – Petrovaradin line section the ETCS L2 is installed.

2.4 Traffic Restrictions

2.4.1 Specialised Infrastructure

According to Article 40 of the Law on Railways ("Official Gazette of RS" No 41/18 and 62/23), if there are appropriate alternative routes, the Infrastructure Manager may, upon consulting interested parties, designate the specialised infrastructure for particular types of traffic.

In case that a specialized infrastructure is designated, the Infrastructure Manager may, when allocating the infrastructure capacity, give priority to such type of traffic, however prioritizing may not be in collision with the competition protection rules. Designating of specialized infrastructure will not exclude the use of such infrastructure for other types of traffic when capacities are available.

There is no specialised infrastructure on the network operated by IŽS in the above sense.

2.4.2 Environmental Restrictions

Environmental restrictions, such as noise levels, are not currently applied on the network managed by IŽS.



2.4.3 Dangerous Goods

The transport of dangerous goods on the railway infrastructure operated by IŽS is regulated by international and national regulations in the field of transport of dangerous goods in accordance with 3.4.4 - Dangerous Goods.

On the Niš – Dimitrovgrad – State Border – (Dragoman) railway line, the transport of tank wagons carrying ammonia is prohibited.

Locations for loading, unloading, transshipment of dangerous goods may be performed only in places that meet prescribed requirements. The stations (service points open to the acceptance and forwarding of goods) within the rail infrastructure do not meet this requirement, wherefore handling of dangerous goods in the station areas (service points) is not allowed.

Handling of certain types of dangerous goods () can be performed on special tracks under special conditions, i.e. on particular parts of the tracks in particular stations. The list of service points in which transshipment of dangerous goods can be performed is given in Appendix 3.8.

For further details, please contact IŽS:

"Infrastructure of Serbian Railways"
Traffic Department
Central Operational Department
Main Dispatcher for Transport of Dangerous Goods
6 Nemanjina St
11000 Belgrade
Serbia

Tel.: +381 11 3619 288 e-mail: <u>rid1@srbrail.rs</u>.

2.4.4 Tunnel Restrictions

On the railway line Belgrade Centre –Pančevo Main St. - Vršac- State border, through the "Vračar" tunnel i.e. on the section junction Karađorđev park – junction and Pančevo Most stop and through the "connecting" ("vezni") tunnel i.e. on the route Karađorđev park junction - Dedinje junction, the trains with diesel traction vehicles, DMUs, diesel motor track vehicles, as well as vehicles with their own diesel generator set (power supply wagon, reefers with generator set station) cannot be regularly dispatched. Exceptions to this are DMUs series 711 and relief (auxiliary) trains with diesel traction of the infrastructure manager which are urgently dispatched to the accident/incident locations and diesel motor track vehicles used for urgent elimination of obstacles disrupting the traffic, while respecting the limitations that interval of sequence and the time between meeting of any two vehicles with diesel drive cannot be shorter than 30 minutes.

In other cases, the diesel motor vehicles of the infrastructure manager can run on the specified sections when the transport of trains for transport of passengers is not organized in the service point Vukov spomenik.

Along with the obligation to respect the restrictions regarding the vehicle drive, for the transport of freight trains containing wagons with a RID marking (loaded or empty vehicles for transport of dangerous goods), the following conditions apply:

- on the part of railway line Pančevo Most–Rakovica and Pančevo Most Belgrade Centre, trains can operate only in the period when traffic of passenger trains is not organized i.e. when the station is closed for passenger transport,
- on the part of railway line Pančevo Most –Rakovica and Pančevo Most Belgrade Centre, there can be only one train with RID marked wagons i.e. meeting of two freight trains if at least one is composed of RID marked wagons is not permitted;



- during the operation of trains composed of RID marked wagons, an additional technical inspection must be carried out, which includes checking of bearing temperature and enhanced visual control of loads (valve, clamps etc.)for the train which operaters in direction Pančevo Most Rakovica and Pančevo Most Belgrade Centre in Pančevo Main St., and for the trains operating in direction Rakovica –Pančevo Most either in Rakovica station or in Belgrade Marshalling Yard (if it is performed in Belgrade Marshalling Yard, there is no need for the inspection to be performed in Rakovica station);
- obligation of railway undertaking upon performed additional technical inspection of a train in stations Pančevo Main St., Rakovica and Belgrade Marshalling Yard, is to register a clause in the telegraph-telephone log "The additional technical inspection of train No _____ was performed on date __at__ hours (signature of authorized representative of railway undertaking)", thereby to inform the train dispatcher in a proved way that technical inspection of train was completed before dispatching it on the part of railway line Pančevo Most-Rakovica. In the event that railway undertaking does not have an organized inspection service in stations Pančevo Main St., Rakovica and Belgrade Marshalling Yard, and that technical inspection of trains composed of loaded or empty RID marked wagons has not been performed, such train cannot operate on the part of railway line Pančevo Most -Rakovica.

Freight trains, which have loaded or empty RID marked wagons, must in no case operate in the direction Belgrade Center - Pančevo Most.

2.4.5 Bridge Restrictions

There are no bridge restrictions in terms of specifically defined requirements apart from those arising from the bridge structural parameters. Exceptionally, until the construction of the fifth longitudinal bridge girder into the construction of "Pančevo Most" across Danube river, on the railway line Belgrade Centre – Pančevo Main St. – Vršac – State Border, between location on junction Pančevo Most—Krnjača Most all assemblies of two freight trains are prohibited on "Pančevo Most".

2.4.6 Maximum Train Weight Restrictions

The maximum train weight for the trains running on the Niš – Dimitrovgrad – State Border – (Dragoman) is restricted to 1200 tonnes.

2.4.7 Train Traction Restrictions

On the Stara Pazova – Novi Sad line section, trains with diesel traction must not be dispatched. The exception from this rule are the trains of railway undertakings performing construction, reconstruction or maintenance of railway infrastructure. In case of trains that, in addition to the train locomotive, also contain the additional work locomotives, i.e. double heading locomotives, such locomotives must run within the train composition along the entire Batajnica – Novi Sad line section.

2.4.8 Train Speed Restrictions

On the Batajnica – Novi Sad line section, the speed of freight trains is 90 km/h. The exception from this rule are the trains of railway undertakings performing construction, reconstruction or maintenance of railway infrastructure.

2.5 Availability of the Infrastructure

All railway lines operated by IŽS are open to railway traffic from 0.00 h to 24.00, except for the lines on which the traffic due to technical condition is temporary impossible/ or with the Decision of the Government of the Republic of Serbia the consent for the suspension of public transport of passengers and goods on the part on the railway infrastructure was given ("Official Gazette of the RS"no.80/2016), and they are listed in Appendix 6. Service points are open for railway traffic permanently, as some of them may have limited operating hours envisaged for the effective staff of the traffic service, as stated in Appendix 6. Details about mentioned working time are published in the timetable material, and for more datils please contact:



"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina Street, 11 000 Belgrade, Serbia Tel/Fax: +381 11 3618 214

E mail: sektor.sp@infrazs.

Exceptionally, on the railway lines with limited hours of operation where mentioned staff is working in limited operating hours, train operations can take place outside the mentioned hours when trains have to operate via auxiliary routes due to the occurrence of an accident or incident. Appendix 3.9 contains an overview of auxiliary routes that may be used as alternative to regular ones. Certain lines that may be used as auxiliary routes can be of different class from the line class along the regular routes with respect to permitted loads per axle or m'.

A railway operator may also submit a request for train path allocation outside the operating hours of the line or railway service points, in which case such railway operator has to bear all the costs of entire traffic organization for longer operating hours of the line, i.e. service points.

If several railway operators are using longer operating hours, they will jointly bear the costs.

Infrastructure Manager is responsible for maintenance, overhaul and modernization of the infrastructure in order to provide appropriate service and safe performance of transport operations. In this respect, IŽS plans regular maintenance of the lines that affect the availability of infrastructure, in the sense of closure of specific line sections for a specific time period or introduction of temporary train speed restrictions.

The infrastructure use restrictions required for regular infrastructure maintenance are part of the capacity allocation process and are published within the timetable documents, in the timetable booklets (KRVs).

IŽS will issue for all railway operators a 3-months' prior notice of any planned longer works to be performed on the railway infrastructure and which could affect the transport operations and the timetable due to the speed restrictions, route changes, use of buses instead of trains for the carriage of passengers, etc.

For all freight trains running in the South-North and transit the part of railway infrastructure between station Velika Plana and node Belgrade, regular routing is across the railway line (Belgrade)-Rakovica-Jajinci-M. Krsna-V. Plana and the compiling of paths in done in this way. Exceptionally this rule cannot be applied during the planned works on reconstruction of above-mentioned railway line.

For all freight trains running in the south-north and transit the part of railway infrastructure between node Belgrade and station Velika Plana, regularly routing is across the railway line (Belgrade)-Resnik-Mladenovac-V. Plana and the compiling of paths in done in this way.

The railway lines on the territory of Kosovo and Metohija are under interim supervision of UNMIK, according to the Temporary Agreement between ZTP Beograd and UNMIK Railways of 31/05/2002 (ref. number 300/2002 - 153 of 31/05/2002), wherefore the path allocation requests for this territory will not be taken into consideration.

2.6 Infrastructure Development

Railway infrastructure, which is managed by IŽS, is constantly being renewed and modernized, in order to enable to the users the best possible service quality.

Development projects of the infrastructure are defined within Strategic plan of IŽS (Decision of the Assembly of Joint stock company for public railway infrastructure management "Infrastructure of Serbian Railways" JSC, Belgrade no. 5/2017-116-49 from June 29, 2017)", which is prepared on the base of the National program of the infrastructure ("The Official Gazette of RS", no. 53/17). Development of the railway infrastructure is directed towards the modernization of the lines which are part of the Pan-European corridor.



Possibility of the realization of the planned works depend upon the amount of the financial means, which are provided from the state budget of the Republic of Serbia and from the amount provided from the other sources of financing.

Appendix 3.11. contains a list of development projects.



3. ACCESS CONDITIONS

3.1 Introduction

This chapter of the Network Statement describes the conditions associated with access to the railway infrastructure managed by the IŽS. These conditions also apply to the part of freight corridors passing through the railway infrastructure managed by the IŽS.

3.2 General Access Requirements

A railway undertaking can provide transport services on IŽS railway infrastructure based on:

- valid license for carriage in railway transport over the infrastructure, issued by Directorate for Railways (hereinafter: DR),
- valid certificate on safety for carriage in railway transport,
- allocated capacity path and contract on provision of access to and use of public railway infrastructure concluded with the infrastructure manager.

Requirements for the submission of application for license, safety certificate and thereof contents are stipulated in the Law on Railways ("Official Gazette of RS" No 41/18 and 62/23), Law on Safety in Railway Traffic ("Official Gazette of RS" No 41/18), Rules on transport licenses in railway traffic ("Official Gazette of RS" No 53/19), Rules on joint safety methods for evaluation of compliance with the requirements for obtaining of safety certificates and safety management system elements ("Official Gazette of RS" No 32/21) and Rules on transport safety certificate forms ("Official Gazette of RS" No 63/19).

3.2.1 Conditions for Applying for Capacity

Request for train path allocation can be submitted by a railway undertaking or an international group of railway undertakings or other persons or legal entities, such as competent authorities, consignors and forwarding agents and operators in combined transport, having interest in provision of public service or having commercial interest in the allocation of railway infrastructure capacity.

Where a train path is allocated to an applicant other than a railway undertaking, the contract on the use of railway infrastructure shall be concluded between the infrastructure manager and the railway undertaking hired by such applicant.

If a request has been submitted after a specified deadline, train path in accordance with remaining capacities will be offered to the applicant, and if there are no capacity constraints, a new path will be subsequently created.

3.2.2 Conditions for Access to the Railway Infrastructure

Services of carriage in railway transport may be provided by a company, other legal entity or entrepreneur registered for provision of public transport services or transport for own purposes, incorporated in the Republic of Serbia, subject to the submission of evidence of fulfilment of the conditions related to good reputation, financial capability, and competence, and the cover for civil liability.

The license for carriage in railway transport and the certificate on safety is issued by DR or a competent authority of another country, based on reciprocity, with which country Serbia has signed an intergovernmental agreement on mutual recognition of certification.

Transport on railway infrastructure may be performed by railway undertakings meeting the requirements referred to in paragraph 1 hereof, who signed the Contract for use of public railway infrastructure. The Contract for use of public railway infrastructure regulates the mutual rights and obligations between the infrastructure manager and railway undertakings and they are concluded in line with article 19 of the Law on Railways.



3.2.3 Licenses

Directorate for railways issue transport license: for transport of goods/passengers and for transport for own purposes.

Transport License is issued to applicant, company, other legal entity whose main registered activity is for provision of railway transport of good and/or passengers, or to a company or other legal entity who performs or will perform transport for own purposes, incorporated in the Republic of Serbia, subject to the submission of evidence of fulfilment of the conditions related to:

- a) good reputation,
- b) financial capability,
- c) proficiency and
- d) cover for civil liability in line with the Law on Railways.

Details related to licensing of railway undertakings are set from article 81.to article 85. of the Law on Railways.

Contact of competent institution for issuance of license is:

Directorate for Railways 6 Nemanina St., 11000 Belgrade The Republic of Serbia Manager's Office tel. (011) 361 68 66 fax (011) 361 83 46 e-mail: kontakt@raildir.gov.rs

• man nomen cranen.go viz

web page: www.raildir.gov.rs

3.2.4 Safety Certificate

The railway undertaking must have safety certificate for transport to be allowed to access infrastructure. The type and scope of operations of railway undertaking related to certificate are specified in the safety certificate.

The safety certificate may include the entire network or certain part thereof.

Safety certificate is consisting of:

- 1) part A confirming the acceptance of railway security management system of railway undertaking;
- 2) part B confirming the acceptance of provisions adopted by railway undertaking in order to meet the specific requirement set for transport safety on appropriate network; these requirement may include the application of technical specification, the national safety regulation and internal regulation of railway undertaking, the acceptance of employee's certificates and permissions for usage of rolling stock used by that railway undertaking.

Directorate for Railways is responsible for issuance of safety certificate for transport in set form and in the form of decision. The decision to issue or to refuse to issue safety certificate for transport is ultimately in the administrative procedure and a dispute can be brought against it at Administrative Court.

The validity period of the safety certificate for transport is five years and can be renewed at the request of the holder.

Directorate for Railways determine in more detail forms of safety certificate for transport, numbering of forms of safety certificate for transport in line with European identification number, the application form for



issuance of safety certificate for transport and instructions for its completion, as well as necessary documentation enclosed with the request for issuance of safety certificate for transport.

Provisions regarding safety certificate for transport are set in Law on Railway Transport Safety.

Contact of competent institution for issuing safety certificate is:

Directorate for Railways 6 Nemanjina St., 11000 Belgrade The Republic of Serbian Manager's Office tel. (011) 361 68 66 fax (011) 361 83 46 e-mail: kontakt@raildir.gov.rs

web page: www.raildir.gov.rs

3.2.5 Coverage for Civil Liability (Insurance)

One of the conditions for issuing a transport license is the fulfillment of the requirements related to civil liability coverage (Insurance).

The requirement relating to civil liability coverage for a company or other legal entity that is registered for the public transport of goods and / or passengers, or performs or will carry out transport for its own purposes, is fulfilled if it is adequately insured or has adequate guarantees under market conditions for coverage, in accordance with legal requirements and confirmed international treaties, for their liability in the event of an accident.

Civil liability coverage may not be required to take effect before the railway undertaking starts operating the service.

3.3 Contractual Arrangements

3.3.1 Framework Agreement

The Infrastructure Manager and an applicant may, by way of exception, draw up a framework agreement on the use of capacity on the relevant railway infrastructure for a period longer than the period of validity of the timetable.

The Framework Agreement between the infrastructure manager and the applicant shall contain the characteristics of the infrastructure capacity for which the applicant applied and which he was offered for a time period exceeding the period of validity of one timetable.

The Regulation on the Manner of Conclusion and Content of Framework Agreements for Allocation of Railway Infrastructure Capacity lays down the procedures, content and criteria relating to the framework agreements for the allocation of railway infrastructure capacity, as well as the obligations of the infrastructure manager regarding information regarding the framework capacity.

At present, the infrastructure manager does not offer the possibility of concluding a framework agreement with the applicant. However, it intensively conducts the activities aimed at defining the procedures so as to have this option open in the near future.

3.3.2 Contracts with RUs

The Law on Railway of the Republic of Serbia stipulates the obligation of concluding a contract on the use of infrastructure that allows railway undertakings to use railway infrastructure. Contracts for use of public



railway infrastructure regulate in more detail the mutual rights and obligations of infrastructure managers and railway undertakings related to guaranteeing the technical and other conditions for safe transport operation, the application of regulations governing the transport of dangerous goods, as well as payment of access charges and charges of services. Contracts for use of public railway infrastructure are concluded under non-discriminatory and transparent conditions.

Contracts on the use of infrastructure are concluded no later than 1 (one) month prior new timetable enter into force or immediately after the allocation of ad hoc train path.

If during the validity period of Contract for use of public railway infrastructure, the railway undertaking through an authorized person submit ad hoc request in approved way for allocation of train path, it is considered that addendum of that contract is concluded at the moment of allocation of requested train path by infrastructure manager.

For other services (basic, additional and accompanying) provided by infrastructure manager special contracts are concluded.

3.4 Specific Access Requirements

3.4.1 Rolling Stock Acceptance

Railway undertaking may use only the rolling stock that complies with the technical regulations and standards. Rolling stock shall, by virtue of their structure and technical condition, ensure safety of transport on the infrastructure, safety of transported persons and goods, safety of staff, and shall meet the health and environment protection requirements.

All requirements relating to rolling stock and thereof use on the railway infrastructure of IŽS are set forth in the Law on Railway Safety and Interoperability ("Official Gazette of the RS", no. 41/18) and Law on Railway Traffic Safety ("Official Gazette of the RS",no.41/18). Railway undertaking shall be responsible for the technical condition, maintenance and operation of the rolling stock.

3.4.2 Staff Acceptance

Railway undertaking shall be responsible for ensuring that his staff meets the requirements stipulated by the Law on Railway Safety ("Official Gazette of the RS", No. 41/8) and applicable by-laws.

The railway undertaking's train manning shall be familiar with the official language in the Republic of Serbia

Railway undertaking shall be responsible for staff training, validity of periodical knowledge tests, knowledge of track condition and local conditions at stations/stops. Railway undertaking is obliged in that respect to abide by the applicable legislation of the Republic of Serbia.

3.4.3 Exceptional Transport

A load shall be considered special if due to its external dimensions, weight or properties, and with respect to the station installations or wagons in transport by one of the railways participating in transport, it causes particular difficulties, wherefore it is received for transport only under special technical or operating conditions. Carriage of special loads in domestic and international railway transport, as well as the conditions under which such carriage may take place, shall be approved by the Infrastructure Manager whose railway infrastructure will be used for transport. IŽS provides the special loads service (for vehicles or goods) in accordance with the provisions on transport of special loads set forth in the Rules on Transport of Special Loads ("Official Gazette of the RS", no. 6/17).

IŽS shall be responsible for the allocation of capacity and defining the conditions for transport of special loads.



In addition to what was stated above, the railway undertaking in international transport shall comply with the provisions of UIC 502.1 and 502.2, governing the process of approval of requests for transport of special loads. The railway undertaking shall submit a request for transport of loads to the relevant department of IŽS. Special loads will be accepted for transport only if special operating and technical conditions are met. For more details on transport of special loads please refer to Chapters 4 and 5 of this Network Statement.

For more details on transport of special loads please contact:

Infrastructure of Serbian Railways"JSC Traffic Department 6 Nemanjina Street 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 36<u>16 814</u> sektor.sp@srbrail.rs

3.4.4 Transport of Dangerous Goods

Transport of dangerous goods by rail in the Republic of Serbia shall be performed in accordance with: Annex C to Convention concerning international carriage by rail (-COTIF) - Regulations governing the international carriage of dangerous goods by rail (RID); the Law on the Transport of Dangerous Goods; the by-laws based on LTDG and other regulations in the Republic of Serbia.

The Ministry of Construction, Transport and Infrastructure is responsible for performance of administrative, inspection, technical and other expert activities in the field of transport of dangerous goods in the Republic of Serbia(www.utot.gov.rs).



4. CAPACITY ALLOCATION

4.1 Introduction

Pursuant to the Law on Railways and Decision of the Government of the Republic of Serbia on incorporation of Joint Stock Company for Public Railway Infrastructure Management and the Company's Articles of Incorporation, "Infrastructure of Serbian Railways" JSC performs the activities of public railway infrastructure management and is responsible for allocation of infrastructure capacities for the purposes of international and domestic transport in a transparent and non-discriminatory manner, provided that all legal provisions on the conditions for access and use of railway infrastructure set out in Chapter 3 of this Network Statement have been previously fulfilled.

4.2. Description of infrastructure capacity allocation procedure

The Infrastructure Manager normally allocates the train paths once a year, upon reconciling the train path allocation requests in the timetabling process, not exceeding the Timetable validity period.

Allocation of infrastructure capacities in the form of a train path is carried out in accordance with the procedures specified in this document for:

- infrastructure capacities allocation procedure for the new Timetable,
- infrastructure capacities allocation procedure during Timetable validity period (including train path allocation on ad hoc request).

A Railway Undertaking may not assign the allocated train path to another Railway Undertaking. Train path trading is prohibited. Train path user will pay a charge for the use of railway infrastructure and for railway traffic organization and control.

The Government of the Republic of Serbia sets out the Methodology for valuation of elements for determining the charges for the use of railway infrastructure. The Decree on methodology for valuation of elements for determining the charges for the use of railway infrastructure is published in the "Official Gazette" of RS" No 122/14. For additional services, a train path user will pay a charge in accordance with the Infrastructure Manager's formal decision.

How to apply?

Request for infrastructure capacity allocation can be submitted by railway undertakings using the train path request form, which is available in Appendix 4.1, and published on IŽS we<u>bsite: www.infrazs.rs</u>.

When submitting the request, the RU is obliged to submit the following technical data for each traction vehicle series: series, description (axle layout), length (mm), weight (t), maximum speed (Vmax), inertia factor, resistance formula (coefficients a, b and c), traction diagram and braking diagram (tabular and graph presentation), traction type (diesel or electric), as per template provided in Appendix 4.1.b. The requested data are input data for capacity allocation, i.e. for software based timetabling. The data are submitted once for each traction vehicle as well as in case of change of data. If within the same series there are traction vehicles with different technical properties ("subseries") the data need to be provided for each "subseries".

Requests are submitted according to procedures defined under section 4.5.

The request should contain the following data:

- Full registered name of the Railway Undertaking (TIN, company identification number),
- Train type (for passenger transport, freight, empty, locomotive, and similar),
- The desired time of train departure from the departure station and the time of train arrival to the terminal station,
- Traffic route and transport route,



- Necessary stops with minimum lengths of delays,
- Traffic period and days (traffic calendar),
- Series and number of wagons/series and number of train units,
- Train length and mass (length in meters, mass in tons),
- Type and serial number of the traction vehicle (traction passport),
- Additional locomotives (type and serial number) and on which section,
- Maximum train speed,
- Braking type,
- Special notes, such as vehicle shunting, change in train composition, implementation of connections, crew change, type of intermodal transport unit, type of dangerous goods (UN number, number for marking of danger or, for Class 1 dangerous goods, the subclass and compatibility group for substances and items, NHM code with minimum 6 digits and the name of dangerous goods based on RID), exceptional consignments, handover procedures on border crossings, technical hold ups (inspection, water supply, removing of waste and similar) and the required time period, the need for additional track capacities (storing, preheating/cooling, train formation and similar), the need for access to other facilities for provision of additional services and similar.

Upon the request of IŽS, a Railway Undertaking will be required to provide all the missing data within five working days, otherwise the request for capacity allocation will not be considered as submitted.

A request for capacity allocation submitted to IŽS on time and containing all the necessary elements makes a basis for timetabling and train path allocation. If a Railway Undertaking changes the request completely or partially after the determined deadlines for request submission it assumes the risk of not having the request granted.

After the annual timetable drafting process has been completed, the remaining available capacities will be allocated according to the deadlines defined in Appendix 4.3 according to the sequence of request submission.

Manner of capacity allocation

IŽS decides on capacity allocation taking into account all legally valid requests and legal provisions in force. In accordance with the Law on Railways, the procedures and deadlines in capacity allocation have been determined under point 4.5 of the present Network Statement.

Defining of procedures and deadlines in capacity allocation is harmonized with Directive 2012/34/EU and its appendices, as well as the RNE recommendations from "Procedures for International Path Requests".

Relevant bodies involved in the capacity allocation process and their responsibility

Bodies participating in capacity allocation process:

- IŽS "Infrastructure of Serbian Railways" JSC as Infrastructure Manager and capacity allocation body
- Railway Undertakings railway undertakings submitting capacity allocation requests
- RNE RailNetEurope body coordinating the allocation of international train paths and determining processes and deadlines for submission of international train path requests
- FTE ForumTrainEurope European organization of railway undertakings representing the European Forum for technical planning of international passenger and freight transport.

IŽS, as Infrastructure Manager and capacity allocation body, is a member of RNE and is actively involved in the activities of FTE.



4.3 Allocation of capacity for maintenance, including the allocation process

Allocation of infrastructure capacities for maintenance, renewal and modernization of railway infrastructure is an integral part of capacity allocation process. Aiming at maintaining a certain level of quality, safety and reliability of railway infrastructure, IŽS — Department for access to railway infrastructure will, during the timetabling process, reserve a part of infrastructure capacities for scheduled railway infrastructure maintenance, for specific time periods and specific line sections.

Periods reserved for scheduled railway infrastructure maintenance are published in the Timetable Booklet.

4.4. Impact of Framework Agreements

"Infrastructure of Serbian Railways" is currently not concluding framework agreements with interested applicants for allocation of infrastructure capacities.

4.5 Schedule for Path Requests and Allocation Process

Each year IŽS prepares a schedule for path request submission and capacity allocation which is applied in the annual timetabling process and in the capacity allocation process outside the annual timetabling process published in the Network Statement.

Railway Undertakings allocation requests for the new Timetable and during Timetable validity period should be submitted in the form defined in Appendix 4.1, to the following address:

By mail, to the following address:
"Infrastructure of Serbian Railways" JSC
Department for access to railway infrastructure
6, Nemanjina St
11000 Belgrade, Serbia
By e-mail: sektor.pzi@srbrail.rs

4.5.1 Schedule of requests submission for new annual timetabling process

The Applicant submits a request for capacity allocation not earlier than 12 months and not later than 10 months before the new Timetable enters into force. Deadlines for requests submission regarding Timetable 2024/2025 which enters into force on December 15th,2024 with validity until December 13th 2025 are presented in Appendix 4.3.

For the needs of Railway Undertakings wishing to use additional capacities or to change parametres of already allocated train paths, the new capacity allocation during Timetable validity period is enabled by:

- Regular amendments of and supplements to the Timetable
- Special amendments of and supplements to the Timetable
- Train path allocation on ad hoc request

In the form defined by Articles 4.5.2 and 4.5.3 in this Network Statement.

4.5.2 Schedule of requests submission for train path allocation during annual Timetable validity period through regular and special amendments of and supplements to the Timetable

During the Timetable validity period, there are regular amendments of and supplements to the Timetable 5 times a year, in accordance with internationally determined terms which are presented in Appendix 4.4. Deadlines for submission of requests for capacity allocation are presented in the column 1, Appendix 4.4.

Requests for regular amendments of and supplements to the Timetable that are submitted after deadlines specified in the column 1, Appendix 4.4, will be considered as special requests and shall be included in



regular amendments of and supplements to only in case of existence of available infrastructure capacities and technical possibilities for their processing.

After the 5th regular amendments of and supplements to the 2024/2025 Timetable enter into force it will be only possible to submit ad hoc requests for capacity allocation.

Besides regular amendments of and supplements to the Timetable in accordance to the terms specified in the column 3, Appendix 4.4, Railway Undertakings may submit special request for infrastructure capacity allocation outside specified terms. If there is possibility for allocation of the requested capacities, consequent changes in the Timetable shall be considered as special amendments of and supplements to the Timetable.

4.5.3 Allocation of capacities during annual Timetable validity period on ad hoc request

Ad hoc requests for infrastructure capacity allocation are requests for allocation of single train path, which are submitted during annual Timetable validity period.

Infrastructure Manager is obliged to respond to ad hoc requests as soon as possible and not later than five working days upon receiving the request.

4.5.4 Path Allocation and Coordination Process

IŽS will allocate the infrastructure capacity if the applicant fulfils the conditions for capacity allocation set out in the Network Statement and if the infrastructure capacity allows such allocation. IŽS will act in such a manner so as not to favour any applicant.

The following criteria will be applied in the path allocation process:

- Volume of service;
- Utilization of railway infrastructure;
- Volume of additional services provided by the IM in connection with the transport provided on the path;
- Business reputation;
- Public service obligation; and
- Quality of performed transport service in the previous period.

After the final deadline for submission of requests for the annual timetabling has expired, IŽS will initiate the capacity allocation process in a transparent and non-discriminatory manner.

Requests for capacity allocation received after the annual timetable drafting cannot affect draft alteration, except with the consent of the Railway Undertaking to whom the capacity has been originally allocated.

Allocated capacity can be used upon conclusion of Access Contract between IŽS and the Railway Undertaking submitting a request for capacity allocation.

Allocated capacity cannot be transferred onto another Railway Undertaking in accordance with the Law on Railways.

Coordination process

Every year at the beginning of the new annual timetabling process, IŽS will conduct consultations with railway undertakings on their plans for the timetable which will come into force in not less than 11 months (x-11). In the course of these consultations, IŽS will inform railway undertakings on major maintenance works, overhaul and modernization of railway infrastructure.

The coordination process is run by IŽS – Department for access to railway infrastructure, which is preparing and publishing the annual Timetable and preparing of all required working materials.



Upon the expiry of the final deadline for submission of requests for capacity allocation for the annual Timetable, IŽS – Department for access to railway infrastructure will start the coordination process, together with railway undertakings for the purposes of solving conflicting requests and their better harmonization, aiming to fulfil the needs of users as much as possible in a non-discriminatory and transparent way.

Timetable planning includes reviewing all received requests, including all restrictions imposed by IŽS and the scheduled infrastructure maintenance plans.

If the number of requests for allocation of the same infrastructure capacity exceeds the permitted capacity of the particular railway line, IŽS apply priority rules from 4.6.

Following the completion of the coordination procedure, IŽS will deliver the draft timetable to railway undertakings. Together with railway undertakings IŽS will perform the final consultations concerning the draft timetable. Railway undertakings must state, in written form, whether they accept, partially or completely, that is, do not accept, the Timetable.

Deadline for making the statement is one month from the day of the draft submission, at the latest.

After the expiry of the deadline for making the statement, IŽS will define the Timetable according to the requests submitted on time and it will be deemed that the train paths have been allocated.

IŽS will subsequently allocate the remaining available capacities according to requests received after the final deadline, in the order of their receipt.

4.5.5 Dispute Resolution Process

IŽS will initiate the dispute resolution process upon delivery of written complaints by railway undertakings, relating to complete or partial acceptance/non-acceptance of the proposed Timetable.

Complaints are to be addressed to IŽS:

- By mail, to the following address: "Infrastructure of Serbian Railways" JSC Department for access to railway infrastructure 6, Nemanjina St 11000 Belgrade, Serbia

- By e-mail: sektor.pzi@srbrail.rs

IŽS will evaluate all complaints and objections and conduct consultations with railway undertakings aiming to fulfil their requests.

If a mutual solution is not found, IŽS will determine the capacity and inform the railway undertakings of this. If after the request coordination it is still not possible to satisfy all the requests for capacity allocation, IŽS will be obliged to announce that the said line section is congested.

Railway undertakings can appeal to the Directorate for Railways with respect to IŽS decision.

A potential appeal of a Railway Undertaking cannot be the reason to delay the process of Timetable adoption and coming into force.

4.6 Congested Infrastructure

If in the coordination process IŽS is unable to adequately satisfy all railway undertaking requests due to capacity limitations, IŽS will declare the requested infrastructure capacity to be "congested".



In cases when IŽS declares infrastructure "congested", it will conduct an analysis of capacities on congested infrastructure and define limitations due to which it was not possible to satisfy capacity allocation requests as well as propose a plan to enhance the particular capacity.

Infrastructure capacity will not be considered congested if the infrastructure capacity cannot be allocated due to the execution of works on the infrastructure maintenance, modernization, construction and reconstruction.

If the number of requests for allocation of the same infrastructure capacity exceeds the permitted capacity of a specific railway line, and if congested infrastructure is declared regarding that line, i.e. the part of that line, IŽS will, in an effort to allocate the train paths, apply priority rules according to the following order:

- 1) BG: VOZ
- 2) passenger trains in international traffic
- 3) passenger trains in domestic traffic
- 4) international freight trains
- 5) other freight trains

Considering the above mentioned priorities, the train path allocation process will be carried out according to the following rules:

- Requests for train paths of regular trains have the priority over the requests for train paths of special trains and trains transporting exceptional consignments;
- Requests for train paths according to framework agreements have the priority over new requests;
- Requests for train paths for a longer time period of service have the priority over requests for train paths for a shorter time period;
- Requests for train paths for a longer route have the priority over train paths for a shorter route.

If a Railway Undertaking considers that its rights were withheld, it can appeal to the Directorate for Railways.

4.7. Exceptional Transports and Dangerous Goods

Exceptional Transports

Transport of exceptional consignments is transport in the course of which there is a deviation from at least one technical standard applied on the given infrastructure, such as for example, axle load, railway vehicle gauge, loading gauge and similar. Taking into account all the elements required for the transport of an exceptional consignment, IŽS will decide whether the requested infrastructure capacity will be allocated and under what conditions.

Deadline for submission of request for transport of exceptional consignments is not later than 20 days in domestic and 30 days in international traffic prior to service provision. Decision on the request for transport of exceptional consignments shall be made as soon as possible and not later than 15 days upon submission of the request.

Detailed information can be obtained at the below address. Deadline for capacity allocation will be as soon as possible. IŽS will decide whether it is possible to accept a certain transport and under which conditions.

Requests are submitted to:

"Infrastructure of Serbian Railways" JSC Traffic Department 6, Nemanjina St 11000 Belgrade, Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 E-mail: sektor.sp@srbrail.rs



In their request for capacity allocation, railway undertakings are required to list all the necessary information on the exceptional consignment which is being transported, regardless of whether it is a capacity allocation process for the annual Timetable or an ad hoc capacity allocation.

Dangerous Goods Transport

Dangerous goods transport on railway infrastructure operated by IŽS is regulated by international and national regulations in the field of dangerous goods transport, in accordance with point 3.4.4 of the Network Statement.

Based on clauses 1.4.2.2.5 and 1.4.3.6 of *RID* and Article 23, para 4, item 2) and Article 29 para 2 of the Law on Transport of Dangerous Goods, a Railway Undertaking is obliged to report every consignment of dangerous goods to railway Infrastructure Manager.

Reporting of dangerous goods transport can be done by phone: +381 11 3618 288 and in writing to the below address. The below address can be also used for more detailed information:

"Infrastructure of Serbian Railways" JSC 6, Nemanjina St, 11000 Belgrade Central Operations Unit Main dispatcher for dangerous goods transport Tel.: +381 11 3618 288

E-mail: rid1@srbrail.rs; glavni.riddisp@srbrail.rs

For the purposes of safe transport of dangerous goods on IŽS network, a Railway Undertaking is obliged to:

- Report each transport of dangerous goods consignment in real time i.e. immediately before the commencement of transport or at acceptance from the successive carrier.
- Report completion of transport of dangerous goods consignment in real time i.e. at the moment of completion of transport after the completed handover of consignment to the consignee at the destination station or upon handover of consignment to successive carrier.

Railway Undertakings are responsible for obtaining appropriate consents regarding the safety of dangerous goods transport.

Pursuant to clauses 1.4.2.3.1 of *RID* and Article 24 para 2 item 1) of the Law on Transport of Dangerous Goods, the consignee of dangerous goods in railway transport is obliged not to postpone the acceptance of dangerous goods consignment which is resulting in the railway undertaking's obligation not to postpone the handover of dangerous goods consignment after having performed the transport service.

Railway Undertaking is obliged to, after having accepted the dangerous goods consignment for transport at the forwarding station, immediately start the process of transporting the said consignment without any additional delays at the station, except for traffic reasons, accident or incident etc. Phased collecting of wagons loaded with dangerous goods (and non-cleaned empty wagons which were previously loaded with dangerous goods) in the forwarding station for the purposes of subsequent dispatching is prohibited due to the safety in transport of dangerous goods. The process of transport of dangerous goods (acceptance of consignment for transport from the consignor, dispatching, transport and handover of consignment to the consignee) must be performed in accordance with the technologically specified time in order to avoid the potential safety risks in transport.

After the customs clearing of consignment, it is exceptionally permitted for the consignment to remain on station sidings but only for a time period which is necessary to organize the dispatching and continuing of planned transport route, or handover to the consignee in accordance with the specified technological process for station operation i.e. Station Regulations, Part II.

Obligation to announce the transport of dangerous goods Class 1 and Class 7



Exceptionally in transport of dangerous goods Class 1 and Class 7, a Railway Undertaking is obliged to submit to the Infrastructure Manager, in writing (Central Operational Unit – Main dispatcher for transport of dangerous goods) an announcement for the said transport in the time period which is not less than 24 hours prior to the moment of acceptance for transport (entry onto IŽS network). Railway Undertaking may send the announcement of transport also in the form of an email with scanned documents to the following address: rid1@srbrail.rs.

The announcement should contain the following data and attachments:

- 1. Consignor
- 2. Forwarding station and country
- 3. Consignee
- 4. Destination station and country
- 5. Entry border station
- 6. Exit border station
- 7. Net quantity of dangerous goods and wagon number in the train loaded with dangerous goods
- 8. Name of goods (official name of the goods)
- 9. UN number, number for marking of danger (all, if there are several)
- 10. Data on persons hired according to the Decision of the Ministry of the Interior of the Republic of Serbia in the capacity of armed company (first and last name, ID document number, etc., from the Decision issued by the Ministry of the Interior of RS)
- 11. Buffer wagon
- 12. Number of the decision on transport and name of issuing state authority.

The announcement should also contain two appendices:

- Photocopy of the Decision on transport issued by a relevant state authority, and
- For Class 1 dangerous goods: Instructions on special safety measures (MSDS lists) from the manufacturer of Class 1 dangerous goods;
- For Class 7: instructions on measures that the Railway Undertaking should take in transport, restrictions and required data on planned transport route as well as measures in case of danger that are adequate in relation to the consignment in accordance with RID 5.4.1.2.5.2.

Permit for transport of Class 1 dangerous goods is issued by the ministry responsible for the interior affairs, and permit for transport of Class 7 dangerous goods is issued by the authority responsible for protection against ionizing radiation and nuclear safety in the Republic of Serbia (Article 7 of the Law on Transport of Dangerous Goods). The announcement of transport should also contain the basic data on the Railway Undertaking and the transport organizer if case of irregularities or emergency events in transport of dangerous goods. In terms of data it is mandatory to specify the first name, last name and mobile phone number of the person (employed with the Railway Undertaking and/or transport organizer) who is always available during the transport.

4.8 Rules After Path Allocation

4.8.1 Non-usage of allocated train path

In cases when a Railway Undertaking is not using the allocated train path envisaged by the Timetable, IŽS will, depending upon the non-usage percentage, charge the reservation of train path, that is, IŽS will cancel the allocated train path.

IŽS is monitoring the realization of allocated train paths, in such a way that IŽS is calculating the train path utilization degree for all the allocated train paths.

The utilization degree is calculated by dividing the realized train path number of one train with the allocated train path number of the same train, and the result is shown in percentages.

The degree of utilization of allocated train paths is calculated monthly, for the calendar month.



IŽS reserves the right to cancel the allocated train path if a train path is utilized less than 25% of the monthly quota, that is, less than 50% of the monthly quota in case of congested infrastructure.

For the allocated train paths where the degree of utilization is less than the borderline degree of utilization, IŽS will charge the non-usage of the capacity.

The borderline degree of utilization, according to the type of the trains, is given in the below table 6.

Table No 6. Borderline degree of utilization

Train type	Borderline degree of utilization [%]
Passenger trains	80
Freight trains	40
Facultative trains	10

Facultative train is a train which has set timetable but operates with special announcement (if needed).

Requests for train paths for all other trains will have priority over the request for train paths for facultative trains.

Infrastructure Manager will not grant facultative train paths on congested infrastructure.

In cases when the degree of utilization of the train path is below the borderline degree of utilization, the Infrastructure Manger will charge the full price of the train path for the used train paths, and for the non-used train paths, which represent the difference between the borderline degree of utilization and the degree of utilization of one train path, IM will charge for the reservation of the train path.

The charge for the reservation is 20% of the agreed train path price.

If the train path is not used in its entirety, as agreed in contract, the full price of the train path will be charged, according to the required elements.

4.8.2. Rules of Cancellation

A Railway Undertaking may cancel the allocated train path as part of changes and amendments of the Timetable. If a Railway Undertaking cancels the allocated route or requires modifications of parameters for the already allocated train paths outside the deadlines set forth in Appendix 4.4 and if they are such that their implementation will result in freeing of infrastructure capacities, such as:

- Cancellation of a part of already allocated train path i.e. shortening of the train path while all other parameters of the allocated train path remain the same,
- Change in traffic regularity, such that the train is transferred from the regular train status into the facultative train status, or the prescribed number of train operating days is reduced,
- Reduction of train length,

IŽS will not charge the costs prescribed under the tariff system under item 5.10.

Cancellation of allocated train path is done in writing, to the following address:

- By mail:
- "Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department



6, Nemanjina St 11000 Belgrade, Serbia - By e-mail: sektor.pzi@srbrail.rs

Cancelled train paths can be allocated to other railway undertakings by IŽS.

4.9. International Timetabling Process Redesign (TTR)

4.9.1. Objectives of TTR

RailNetEurope (RNE) and Forum Train Europe (FTE), supported by the European Rail Freight Association (ERFA) are currently working on a Redesign of the International Timetabling Process (TTR). The objective of TTR is to harmonise and improve the European rail timetabling system to significantly increase the competitiveness of railway transports.

TTR consists of different components, including in particular an improved planning of the distribution of infrastructure capacity (including temporary capacity restrictions) and the introduction of new capacity allocation processes.

The purpose is to better serve all market needs and achieve an optimised use of existing infrastructure capacity. In particular for passenger traffic it will mean earlier availability of the final timetable allowing earlier and more reliable ticket purchasing for passengers. For the majority of freight traffic, it will mean more possibilities for short-term path requests and thus more flexibility to better meet customers' needs.

Detailed information can be found on ttr.rne.eu and http://www.forumtraineurope.eu/services/ttr/.

TTR is planned to be fully implemented for the timetable 2025 provided that it is supported by the European and national legal framework.



5. SERVICES AND CHARGES

5.1 Introduction

Serbian legislation defined four types of services which railway undertakings can use with the aim of performing of transport operations on the allocated infrastructure capacity.

Categories of services offered by "Infrastructure of Serbian Railways" JSC to railway undertakings on the network are in line with the provisions of the Law on Railways and defined by the following documents:

- Decision on establishing of Joint Stock Company for Public Railway Infrastructure Management ("Official Gazette of RS" No 60/2015);
- Rulebook on organization and systematization of jobs at Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways";
- Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14).

The services that can be provided to railway undertakings are the following ones:

- 1. Minimum access package of services (hereinafter: the minimum package of services);
- 2. Basic services in services facilities including the access tracks to such facilities;
- 3. Additional services; and
- 4. Ancillary services.

Until the Government determines the Methodology for determining the price for access and the price for services and, based on it, the specific rules for calculation of the price for access and the price for services provided by the Infrastructure Manager, "Infrastructure of Serbian Railways" will apply the valid Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14), and according to this Methodology, where necessary, classification to the following service categories:

- category I: minimum package of services
- category IIa: package for track access to service facilities
- category IIb: package for provision of services in service facilities
- category III: package for additional services
- category IV: package for ancillary services

IM – "Infrastructure of Serbian Railways" JSC will enable all interested railway undertakings to use the minimum access package of services and track access to services facilities, in a non-discriminatory manner, provided that railway undertakings have fulfilled the requirements for rail transport service in accordance with the provisions of the Law on Railways and the signed Contract for the use of railway infrastructure. Railway Undertaking's requests for the use of facilities and services provided in such facilities may be rejected only if there are feasible alternatives enabling the railway undertakings to perform the transport of goods and passengers on the same or alternative transport routes under the economically acceptable conditions. According to the nature of distinction and type of activity, the former notion of service facility can be aligned with the notion of services facility in the entire text.

The use of all services facilities, additional and ancillary services provided by the IM – "Infrastructure of Serbian Railway—" JSC - will be enabled to all railway undertakings in a non-discriminatory manner and upon their request, and will be defined in a separate contract.

The use of services facilities not owned by the IM – "Infrastructure of Serbian Railways" JSC, as well as additional and ancillary services not provided by the IM – "Infrastructure of Serbian Railways" JSC, is subject to separate contracts with managers of the said facilities and service providers.



Based on the volume of services provided, as defined in items 5.2 to 5.10, Railway Undertaking pays a price for access and a price for the provided service to:

- "Infrastructure of Serbian Railways" JSC based on the Contract for the use of railway infrastructure and separate contracts;
- Other service providers based on separate contracts.

5.2 Charging Principles

The basic principles underpinning the charging regime for the use of infrastructure are set forth in the Methodology for valuation of elements for determining the charges for the use of railway infrastructure ("Official Gazette of RS" No 122/14, dated November 11, 2014). The Methodology is defining, in more detail, valuation of elements for determining the level of charge for minimum package of services and package for track access to service facilities and provision of services in service facilities.

The methodology is based on the principle that railway undertakings should only bear the justified cost of IM operations and the costs arising from the efficient provision of services requested by the users.

This methodology is based on the economic principle of valuation of elements for determining of charge level known as marginal cost plus (MC+). It is a charge setting principle based on marginal costs increased by the mark-up. The selected principle enables covering of justified costs arising in provision of requested services and is favourable for the so called "network systems" (systems that require major capital investments such as telecommunications, energy, natural gas transportation, road transport and other means of transport).

Marginal costs are estimated based on the variable costs which, within the Methodology, includeshort-term marginal costs: track wearing, train movement control and signalling, consumption of energy sources and overheads.

The charge is set based on the following elements: line category (main, regional or local) used by train, use of railway nodes, train category (passenger or freight) and traction type (electrical or diesel).

The components of the total charge include charge for the minimum package of services (category I), charge for track access to service facilities (category IIa), charge for providing the services in service facilities (category IIb), charge for providing the additional services in service facilities (category III) and charge for providing the ancillary services in service facilities (category IV).

5.2 Minimum Access Package and Charges

Minimum access package

Within the minimum package of services for the use of railway infrastructure, IŽS provides the following services:

- Handling of requests for capacity allocation;
- Right to use the allocated capacity;
- Use of infrastructure on the main running track (turnouts, tracks, railway nodes and lines),
- Train control including signalling, regulation of train movements, acceptance and dispatching of trains and communication regarding the train operations and provision of information on train movements;
- Use of electrical supply equipment, where available;
- Provision of all other information to implement or operate the service for which the capacity has been granted.

The access price includes the minimum access package of services. Railway Undertaking will pay the access price to "Infrastructure of Serbian Railways" JSC based on the Contract for the use of public railway infrastructure.



- Handling of requests for infrastructure capacity

Handling of requests for infrastructure capacity allocation is a part of the capacity allocation process described in Chapter 4. Principles, priorities and criteria for allocation of infrastructure capacity. Requests for infrastructure capacity allocation which have been submitted by railway undertakings are processed in mutual cooperation with railway undertakings, implementation possibilities are examined, contradictions resolved and the train path offer is prepared, which ultimately results in a Timetable.

- Right to use the allocated capacity

Provided that all necessary prerequisites for the train operation are in line with valid legal provisions on conditions for access to and use of railway infrastructure specified in Chapter 3 of the present Network Statement, the applicable legislation and the signed Contract for the use of railway infrastructure, Railway Undertaking is entitled to use the allocated capacity in the form of a train path.

- Use of infrastructure on main running track (turnouts, tracks, railway nodes and lines)

Use of infrastructure on main running track (turnouts, tracks, railway nodes and lines) on the allocated capacity enables the Railway Undertaking to perform train operations.

- Train control including signalling, regulation of train movements, acceptance and dispatching of trains and communication regarding the train operations and provision of information on train movements

Overall train traffic management, including signalling, train movement regulation, acceptance and dispatching of trains, communication regarding the train operations and provision of information on train movements using the telecommunication devices enables railway undertakings to perform train operations on the allocated train path.

- Use of electrical supply equipment

On its electrified railway lines IŽS enables a Railway Undertaking to use the electrical supply equipment for traction (without electricity).

- All other information to implement or operate the service for which the capacity has been granted

After the Timetable has been adopted and published, railway undertakings will be provided with all additional information required for the train operations within the minimum access package of services.

Charge for the minimum package of services (category I)

Charges for the minimum package of services for infrastructure access are defined based on the costs of railway traffic management and infrastructure capacities maintenance.

The level of unit charges is determined in relation to line category (main, regional, local), train category (passenger trains, freight trains) and traction type (diesel, electrical).

The charging units are:

- 1) Train km;
- 2) Gross tonne km.

Charge for minimum package of services (NKI) is determined according to the following formula:

$$NKI = (\sum VKM_{ijk} \cdot C_{VKM_{ijk}}) + F \cdot (\sum BRTKM_{ij} \cdot C_{BRTKM_{ij}})$$

Kev:

i – Line category (main, regional, local)



i – Train category (passenger trains, freight trains)

k – Traction type (diesel, electrical)

 $(\sum VKM_{ijk} \cdot C_{VKM_{ijk}})$ - charge for the use of infrastructure capacities for the minimum package of services in relation to line category (i), train category (j) and traction type (k)

 VKM_{ijk} - number of train km on the network in relation to line category (i), train category (j) and traction type (k)

 C_{VKM} - charge per one train km in relation to line category (i), train category (j) and traction type (k)

F - factor depending on the train category (factor level depends on the train category impact on the level of infrastructure maintenance costs or the applied strategy for development of a particular segment of railway market)

 $(\sum BRTKM_{ij} \cdot C_{BRTKM_{ij}})$ - charge for wearing out of line and tracks during train passing in relation to line category (i) and train category (j)

 $^{BRTKM}_{ij}$ - number of gross-tonne km on the network in relation to line category (i) and category of the train (j)

 $C_{BRTKM_{ij}}$ - charge per one gross-tone km in the function from the line category (i) and train category (j)

The level of charge for the path of one train depends on the train gross mass. Gross-tonne km, in the sense of the calculation of the level of charge for the path of one train, is defined as a product of train km and train gross mass, which implies the total mass of all working locomotives and the total mass of all hauled stock.

Freight trains with electrical traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tonne km [RSD/GTKM]
Main line	93,50	0,0858
Regional line	63,77	0,0781
Local line	10,53	0,0361

Freight trains with diesel traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	79,04	0,0858
Regional line	51,24	0,0781
Local line	10,07	0,0361



Passenger trains with electrical traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	62,33	0,0686
Regional line	42,51	0,0625
Local line	7,02	0,0289

Passenger trains with diesel traction

Line category	Charge per one train km [RSD/TKM]	Charge per one gross-tone km [RSD/GTKM]
Main line	52,69	0,0686
Regional line	34,16	0,0625
Local line	6,71	0,0289

Factor depending on the train category [F] – applied to all types of freight trains and passenger trains and it amounts to 1.0.

Charge for track access and use of service facilities (categories Ia and IIb)

Charges for track access and use of service facilities are defined based on the costs of railway traffic regulation and infrastructure capacities maintenance.

The level of unit charges is determined in relation to railway node (Subotica, Novi Sad, Beograd, Lapovo, Niš, Pančevo), train category (passenger trains, freight trains) and traction type (diesel, electrical).

The charging units are:

- 1) Number of trains;
- 2) Gross tonne km;
- 3) Number of serviced trains.

The charge is levied for the trains starting and finishing their running in the railway node, that is, transiting the railway nodes, as well as for the trains in railway nodes.

Serviced train is a train to which a service of using the service facilities in a railway node has been provided aiming to use the services of technical-wagon unit in train inspection, maintenance of wagons, railway vehicles and machinery.

Access and use of service facilities (categories IIa and IIb)

Charge for use of infrastructure when the trains are starting and finishing their running in the node, that is, when they are transiting railway nodes (NKIIa), as well as for servicing of the trains in the railway nodes (NKIIb) is determined as follows:

$$NKII = NKIIa + NKIIb$$

$$Key:-NKIIa = (\sum Va_{lmn} \cdot C_{Va_{lmn}}) + (\sum BRTKM_{lm} \cdot C_{BRTKM_{lm}})$$



$$NKIIb = \sum Vb_{lm} \cdot C_{Vb_{lm}}$$

- 1 Node (Subotica (1), Novi Sad (2), Beograd (3), Lapovo (4), Niš (5), Pančevo (6))
- m Train category (passenger trains, freight trains)
- n Traction type (diesel, electrical)
- $(\sum Va_{lmn} \cdot C_{Va_{lmn}})$ charge for the use of infrastructure capacities in the node for the package of services IIa in relation to node (l), train category (m) and traction type (n)
- Va_{lmn} number of trains in the node in relation to node (1), train category (m) and traction type (n)
- C_{Valmn} charge per one train of used infrastructure capacities in the node, in relation to node (l), train category (m) and traction type (n)
- $(\sum BRTKM_{lm} \cdot C_{BRTKM_{lm}})$ charge for wearing out of railway line and railway track when using the infrastructure capacities in the node, for package of the services IIa in relation to node (l) and train category (m)
- $BRTKM_{im}$ number of gross-tonne km in the node, in relation to node (1) and train category (m)
- $C_{BRTKM_{Im}}$ charge per one gross-tonne km in the node in relation to node (l) and train category (m)
- $\sum_{l}^{Vb_{lm}} \cdot C_{Vb_{lm}}$ charge for providing the services of train "servicing" in the node, for package of services IIb, in relation to node (l) and train category (m)
- Vb_{lm} the number of trains which were provided the service (which were "serviced") in the node, in relation to node (l) and train category (m)
- $C_{Vb_{lm}}$ charge per one train, "serviced" in the node, in relation to node (l) and train category (m)

Freight trains with electrical traction

	•	
Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tonne km in the node [RSD/GTKM]
Novi Sad	3.658,76	0,0801
Beograd	4.302,04	0,0894
Lapovo	4.987,87	0,0744
Niš	5.422,50	0,1171
Pančevo	3.257,01	0,0911
Subotica	4.097,11	0,0497

Freight trains with diesel traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tonne km in the node [RSD/GTKM]
Novi Sad	3.607,21	0,0801
Beograd	4.145,57	0,0894
Lapovo	4.935,40	0,0744
Niš	5.293,94	0,1171
Pančevo	3.196,24	0,0911
Subotica	3.944,07	0,0497



Passenger trains with electrical traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tone km in the node [RSD/GTKM]
Novi Sad	2.439,17	0,0534
Beograd	2.868,03	0,0596
Lapovo	3.325,25	0,0496
Niš	3.615,00	0,0781
Pančevo	2.171,34	0,0607
Subotica	2.731,41	0,0332

Passenger trains with diesel traction

Node	Charge for the use of infrastructure capacities in the node per one train [RSD/train]	Charge per one gross-tone km in the node [RSD/GTKM]
Novi Sad	2.404,81	0,0534
Beograd	2.763,71	0,0596
Lapovo	3.290,27	0,0496
Niš	3.529,29	0,0781
Pančevo	2.130,82	0,0607
Subotica	2.629,38	0,0332

5.4 Additional Services and Charges

Additional services include:

- Supply of electricity for train traction;
- Preheating of the passenger trains, water supply, etc.;
- Modified contracts for the service:
 - (1) control of transport of dangerous goods,
 - (2) assistance in transport of special trains (exceptional consignments).

Use of the above mentioned services provided by IŽS will be enabled to all railway undertakings that have been allocated a minimum access package of services, in a non-discriminatory manner and upon their request.

Railway undertakings must present the request for the use of additional services in the capacity allocation process, please refer to Chapter 4.

In order to be able to use the above services a Railway Undertaking is obliged to conclude a separate contract with IŽS or with another service provider and pay the charge for provided service in accordance with the provisions of such contract.

More detailed information on provision of additional services can be obtained from IŽS.

"Infrastructure of Serbian Railways" JSC Railway Infrastructure Access Department 6 Nemanjina St



11000 Belgrade, Serbia Tel: +381 11 3618 214 Fax: +381 11 36<u>16 814</u> <u>sektor.pzi@</u>srbrail.rs

The level of charges for additional services provided by Infrastructure Manager is determined based on the costs incurred during the provision of these services.

Charges for using the additional services are applied in a non-discriminatory manner for all the railway undertakings, that is, service users.

When determining the level of prices the time norms for performing of tasks were used in accordance with the Methodology for determining the required number of workers for performing the planned scope of work ("Official Gazette of ŽTP Beograd" 10/85) and the price for hiring of staff according to the Methodology for calculation of labour sales price per effective hour for the employees of "Infrastructure of Serbian Railways" (Decision of the Board of Directors 4/2015-53-17 dated 29.12.2015) and other valid railway regulations and documents.

The prices of additional services are determined in accordance with the Methodology for valuation of elements for determining the charges for the use of railway infrastructure. The levels of prices for additional services are determined as a product of standardized period for service performing and price of effective working hour of staff hired to provide the service, and they are solely based on the actual cost of work incurred during the provision of the particular service or directly determined by means of the Infrastructure Manager's separate decision.

Additional services are provided upon the Railway Undertaking's request, and the prices are applied in a non-discriminatory manner for all railway undertakings. Railway Undertakings will pay such prices according to the actual level of use.

- Supply of electricity for traction and charges

For the service of supply of electricity for traction please refer to: Electrical Engineering Department 6, Nemanjina St 11000 Belgrade, Serbia

Tel: +381 11 3618 241 Fax: +381 11 36<u>18 130</u> direktor.etp@infrazs.rs

The prices of traction electricity depend on the prices of electricity determined by the supplier (currently JP Elektroprivreda Srbije), actual consumption costs, gross tonne km and train type. The calculation method is provided in Appendix 9.

- Preheating of the passenger trains

On IŽS network there is a device for preheating of passenger trains installed in Subotica station. "Infrastructure of Serbian Railways" JSC is not providing services of preheating of passenger trains, water supply etc.

More information regarding the preheating of passenger trains are available at"

"Srbija Voz" a.d. 6, Nemanjina St. 11 000 Belgrade, Serbia Tel: +381 11 3614 811 Fax: +381 11 3614 811

Email: putnik.info@srbvoz.rs



- Services for transport of exceptional consignments and dangerous goods

a) Services for transport of exceptional consignments

IŽS provides the service of transport of exceptional consignments (vehicles or items) according to the provisions for transport of exceptional consignments prescribed under the Regulations on transport of exceptional consignments.

The service involves processing of railway undertaking's request to examine the possibilities for transport in terms of technical aspect and setting of other technical requirements and protective measures for transport of consignments that are not fulfilling the general technical standards for transport on the particular line section, e.g. loading gauge, axle loading etc. Any deviation from the standards is considered to be an exceptional consignment and a special procedure is required. The service involves additional engagement of IŽS's employees in preparation and carrying out of transport of exceptional consignments such as: defining of transport conditions, possible engagement of additional staff for monitoring of transport and inspection of tracks after the transport, possible temporary re-location of trackside facilities and equipment etc.

IŽS is deciding whether it is possible to accept certain transport and under which conditions. It is necessary that for, every individual transport, IŽS and the Railway Undertaking define the scope and specification of needed services.

b) Services for dangerous goods transport

IŽS provides additional services to railway undertakings related to transport of dangerous goods. Control of dangerous goods transport for every individual transport is defined between IŽS and the Railway Undertaking, depending upon the specification of needed services. The availability and method of providing this service on IŽS network will be determined based on the decisions and procedures which will be subsequently prescribed by IŽS.

Charges for services of transport of exceptional consignments and dangerous goods

The unit price of additional services regarding the transport of exceptional consignments and dangerous goods is determined based on the actual costs incurred in provision of such service and unit prices of staff hired from the public railway infrastructure manager and is applied in a non-discriminatory manner to all railway undertakings.

Issuing of approvals for transport of exceptional consignments

Operation	Measuring unit	Price in RSD VAT exclusive
Processing of request, issuing of conditions and informing by means of telegramme for the purposes transport of exceptional consignments	Request for transport of exceptional consignment	12.976,00

Accompanying the consignments by professional railway staff, as necessary, according to type and complexity of exceptional consignment transport as set out in the Regulations on transport of exceptional consignments.

Unit price for this service is determined according to effective working hours of hiring of the employee and number of persons accompanying the exceptional consignment.

Operation - operators	Measuring unit	Price in RSD VAT exclusive
-----------------------	----------------	----------------------------



Accompanying performed by an employee from traffic department	Effective hour of accompanying	1.844,00
Accompanying performed by an employee from civil engineering department	Effective hour of accompanying	1.339,00
Accompanying performed by an employee from electrical engineering department	Effective hour of accompanying	1.453,00

If the employee accompanying the consignment is entitled to daily allowance for the business trip in the country, the service price should also include the cost of realized daily allowances. The amount of daily allowances is determined in the Collective Agreement of the public railway Infrastructure Manger.

Transport of exceptional consignments with exceeded axle-loading

The unit price for approving the transport of exceptional consignment with exceeded axle-loading is 59,00 RSD/net tonnes VAT exclusive.

5.5 Ancillary Services and Charges

Ancillary services include the following:

- 1) access to telecommunications network
- 2) provision of additional information
- 3) technical inspection of rolling stock
- 4) ticketing services in passenger stations
- 5) maintenance services provided in maintenance facilities dedicated to high speed trains or other types of rolling stock requiring specific facilities where the works performed are not a routine daily maintenance and require the vehicle to be withdrawn from service
- **6)** other ancillary services

IŽS reserves the right to decide which of the available ancillary services will be provided and under what conditions. If IŽS is providing a particular service, it will provide it to all railway undertakings under equal conditions in a non-discriminatory manner and upon their particular request.

The charges for ancillary services provided by "Infrastructure of Serbian Railways" JSC will be determined based on the actual costs incurred during the provision of the said service and will be a subject to a separate contract concluded between the interested parties.

- Access to telecommunications network

IŽS provides railway undertakings with the service of access to the telecommunications network in accordance with the market conditions. Railway Undertaking should define, together with IŽS, the scope and specification of required services.

- Provision of supplementary information

IŽS provides, if available, the following supplementary information on the use of railway infrastructure to the railway undertakings:

- Provision of Timetable material (timetable graphs, timetable booklets) prepared and published by IŽS;
- Submission of excerpts from the local regulations of importance for railway transport or other documents.

For any further information the Railway Undertaking should define, together with IŽS, the scope and specification of required services.



- Technical inspection of rolling stock

Technical inspection of rolling stock is performed upon obtaining of license for their use and prior to putting the vehicles into service.

Directorate for Railways prescribes the conditions to be fulfilled by the entities performing the technical inspection of vehicles and the manner for performing of technical inspection.

Only the rolling stock fulfilling the requirements prescribed by the Law on Safety can be included in the train and this is determined by means of a rolling stock inspection.

Railway Undertaking is responsible for proper composition of the train and it is obliged to check whether the train rolling stock is in a proper technical condition. Train composition and distribution of rolling stock in the train must ensure safe train movement and braking.

"Infrastructure of Serbian Railways" JSC is not providing the services of technical inspection of wagons and rolling stock.

- Ticketing services in passenger stations

"Infrastructure of Serbian Railways" JSC is providing the ticketing services in passenger stations according to the special request of interested Railway Undertaking and according to its own capacities and assessment of impact on its staff's basic work process.

- Maintenance services provided in maintenance facilities dedicated to high-speed trains or other types of rolling stock requiring specific facilities

The network operated by "Infrastructure of Serbian Railways" JSC currently does not have any maintenance facilities dedicated to high speed trains or other types of rolling stock requiring specific facilities providing the respective ancillary services.

- Other ancillary services

IŽS provides other ancillary services:

• Staff training and/or testing in line with the internal documents and technological procedures of IŽS.

Staff training and testing

The service of training and testing of public railway infrastructure user's staff is provided by the Infrastructure Manager in accordance with articles 60 to 64 of the Law on Safety in Railway Traffic ("Official Gazette of RS" No 41/2018) .The price for training and testing of interested users is determined as follows:

$$Cpp = Tpo + Tto + Tpz + Tos$$

This price includes:

- cost of practical training Tpo performed by minimum one expert from the Infrastructure Manager (familiarizing the candidates with the local conditions and technical capacities);
- cost of theoretical training Tto performed by minimum two lecturers (familiarizing with signalling and traffic regulations, special measures for occupational safety and protection as well as all important normative acts provisions of station regulations, technological work process etc., and if necessary provisions in connection to the transport of dangerous goods);
- cost of testing Tpz taking of expert exam regarding the familiarity with railway infrastructure performed by minimum four members of expert committee (president, 2 examiners from the expert field and 1 examiner on the provisions of measures for occupational safety and protection);



- cost of staff Tos hired for the provision of respective service according to the actual level of realization (daily allowances, travelling expenses, submission of required materials etc.)

The price for this service is determined in accordance with the separate Contract between IŽS and the interested party and specification of costs is provided in a descriptive manner and expressed according to the number of candidates and hired experts from the Infrastructure Manager involved in provision of this service.

5.6 Discounts

"Infrastructure of Serbian Railways" JSC does not approve quantity discounts.

5.7 Performance Scheme

One of the most important indicators of efficient network operations, both for Railway Undertaking and Infrastructure Manager, is train delay.

Train delays are monitored related to the causes of delays. Accordingly, the delays can be primary and secondary.

Primary delays are all train delays caused by interference or disturbance which led to the delay and that were not caused by delay or cancellation of other train.

Secondary delays are train delays caused by already existing earlier delay.

Overview of primary and secondary causes of train delays is presented in Appendix 7 of the Network Statement.

IŽS keeps a record of movements of all trains on its network and determines the causes of delay.

Delays can be caused by the following:

- Infrastructure Manager,
- Railway Undertaking,
- external factor.

Number of minutes of train delay is determined on the basis of deviation of train actual running time compared to the train running time envisaged by the Timetable.

The compensation for all primary train delays is calculated on the basis of the number of minutes of train delay and charged between IŽS and RU, if agreed under the Contract for the use of railway infrastructure. The reason for this is to motivate the Railway Undertaking and the Infrastructure Manager to minimize the Timetable deviations on the network and to increase the quality of transport service offered to the end users.

The compensation for delay is 0.1% of the charge for the entire train path, for every minute of delay. The total amount of the delay compensation for every individual train can be maximally up to 5% of the charge for the entire train path, for each party responsible.

For the delays of passenger trains less than 10 min per 100 km of allocated train path, that is, for the delays of freight trains of less than 40 min per 100 km of allocated train path, the charging between IŽS and RU is not performed. Calculation is performed solely for the entire train path, not for the particular parts of the path.

For the train paths shorter than 100 km the permitted delay is determined proportionally to the actual path length.

If the Railway Undertaking does not start the train 300 minutes after the prescribed departure according to the Timetable, it will be deemed that the train path of that train has been automatically cancelled for that day.



Train delays, caused by accidents or incidents, in respect of which the responsibility for the delay cannot be determined with certainty without the investigation procedure, will be calculated subsequently.

Delays caused by the external factor arise from the circumstances which are not under influence of the Infrastructure Manager or the Railway Undertaking. Delays caused by the external factor are the delays caused by the force majeure, or the delays caused by the third parties.

5.8 Changes to Charges

Charges for the minimum package of services and track access to service facilities, as well as charges for additional and ancillary services, can be modified depending on the conditions on the market of the railway services, in which case it must be published at least six months in advance.

5.9 Billing Arrangements

Method and time schedule for calculation and payment of charges, will be determined in detail in the contract between the Infrastructure Manager and the Railway Undertaking.

Charges are collected through:

Finance Department 6 Nemanjina Str. 11 000 Belgrade, Serbia Phone: +381 11 3618 465 Fax: +381 11 3618 465

finansijeizs@srbrail.rs

The Finance Department defines the payment security instrument for the use of public railway infrastructure.

For the use of public railway infrastructure during the validity period of 2024/2025 Timetable, the payment security instrument is defined according to the following:

The RU undertakes to submit to "Infrastructure of Serbian Railways" JSC (Finance department) with respect to the timely settlement of due obligations under the contract on the use of public railway infrastructure, 5 (five) blank solo bills of exchange registered with the National Bank of Serbia, bill of exchange authorization and a copy of the card of specimen signatures. Blank solo bills of exchange must be submitted within 15 days from the date of signing the contract on the use of public railway infrastructure, otherwise, the contract will have no legal effect. The term of validity of the bill of exchange authorization must be at least 30 days longer than the date of final settlement of the contractual obligation and is not related to the termination of legal effect under the Contract. The RU is obliged to submit to "Infrastructure of Serbian Railways" JSC, Finance department, new instruments for securing the regular settlement of financial obligations in case the previously submitted ones are implemented, i.e. when other circumstances arise due to which the previously submitted instruments cannot be implemented, no later than 15 days from the new circumstance's occurrence.

The Finance Department monitors the realization of the payment of due obligations under the contract on the use of public railway infrastructure, and in case the RU does not settle the due obligations within the deadline, it has the right to activate bills of exchange, which were submitted in order to secure payment.

If during the duration of the Contract on the use of public railway infrastructure, due to a delay in the settlement of obligations, a security instrument is activated, the RU will be obliged to provide a bank guarantee as an instrument for securing the payment in the following contract.

5.10 Tariff system

IŽS charges fee for the train path allocation procedure costs as follows:



- for the allocation of annual train paths for the 2024/2025 Timetable nor for the allocation of train paths under the requests for amendment of annual 2024/2025 Timetable performed within the deadlines prescribed in Appendix 4.4, IŽS will not charge procedure costs.
- for allocation of train path under the extraordinary request for amendment of the annual timetable amount to 17.137,00 RSD per train path.
- for allocation of ad-hoc train path amount to 12.213,00 RSD per train path.



6. OPERATIONS

6.1 Introduction

The transport operation on the railway infrastructure shall be such manner to ensure the protection of life, property and environment. The railway undertaking operating on the railway infrastructure will be obligated to comply with the regulations and provisions applicable to transport operations on the particular railway infrastructure.

6.2 Operational Rules

The list of applicable regulations and instructions related to operational rules is given in a separate Appendix 2

At some locations on the infrastructure and in some cases, there are deviations from the applicable regulations (approved by the Directorate for Railways upon IŽS's proposal). The information about this is published by IŽS. The relevant address for these regulations, instructions and modifications is:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina Street 11000 Belgrade Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 sektor.sp@srbrail.rs

6.3 Operational Measures

In case of traffic disturbances, IŽS, together with Railway Undertakings, will undertake all necessary measures to restore normal operating conditions as soon as possible.

Traffic disturbance will mean congesting of some parts of the network or stations that may occur as a consequence of disturbances occurring in traffic due to any reason.

6.3.1. Principles

In order to solve the traffic disturbances, IŽS will undertake appropriate measures to restore the planned Timetable, while taking into consideration the needs of passengers and users of freight traffic, as well as traffic safety. Aiming to solve the traffic disturbances, IŽS may apply operation rules under 6.3.2., cancel some trains or assign another train path in agreement with a Railway Undertaking, depending on the type of disturbance and expected duration.

In case a longer traffic disruption is expected, IŽS will, in agreement with railway undertakings, prepare an interim timetable for the period until regular operation is restored. IŽS may seek railway undertakings' assistance with the aim of normalizing the traffic operating conditions, even when such railway undertakings are not directly causing the disturbances, which may include using their rolling stock and personnel in order to normalize the traffic.

6.3.2. Operation regulation

For the purposes of restoring the normal traffic flow, the operational rules for railway traffic management will apply as set out in the Law on Safety in Railway Traffic, Traffic Regulations ("Official Gazette of RS" No 34/22 and 107/22), the Instructions on particular procedures in performing of traffic service on the territory of Infrastructure of Serbian Railways ("Official Gazette of Serbian Railways" No 43/22), the Instructions on organization and work procedures of operational service in the area covered by



"Infrastructure of Serbian Railways" JSC ("Official Gazette of Serbian Railways" No 21/17, 21/18 and 37/18) and other internal documents of IŽS.

In cases when traffic is interrupted on some part of the line due to a defect in the traction means of the RU in order to normalize traffic as soon as possible the IŽS operational service takes operational measures prescribed by article 34 of the internal act Instructions on organization and work procedures of operational service in the area covered by "Infrastructure of Serbian Railways" JSC ("Official Gazette of Serbian Railways" No 21/17, 21/18 and 37/18).

In case of delays and premature train dispatches, the rule applies that lower-ranking trains may not interfere with movements of higher-ranking trains. A lower-ranking train can be given the priority only if in such a way increase in delays is avoided and the higher-ranking train can make up for the delay on its further route. With same rank trains, priority is given to that train whereof delay might cause it to lose connections in connecting stations. If the connections are not in question, priority is given to that train which has a longer route to its destination station, i.e. which is running on time. Necessary measures to be taken in case of accidents and incidents are defined in the Law on Safety in Railway Traffic, by the Rules on reporting, investigating, recording, statistical monitoring and publishing of data on accidents and incidents ("Official Gazette of RS" No 32/21), Instructions on procedures in case of accidents and incidents ("Official Gazette of Serbian Railways" 44/21). Trains which are taking part in rectifying the disturbances caused as a result of accidents and incidents have the priority (ranking) over all other trains.

6.3.3. Foreseen and Unforeseen problems

Foreseen problems

Necessary measures to be undertaken in cases of foreseen problems such as: technical disturbances of signalling & safety and telecommunication devices, strong wind, natural disasters, snow etc., are governed by Traffic Regulations ("Official Gazette of Serbian Railways" No 34/22 and 107/22) and other regulations governing the above mentioned.

Unforeseen problems

In very urgent cases, when railway infrastructure is temporarily rendered unavailable for use, IŽS may, without prior notice, cancel train paths for the time period necessary to put the system back in working order. IŽS will notify all interested parties of the resulting situation.



7. SERVICE FACILITIES

7.1. Introduction

Services facility means a facility, including land, buildings and equipment, arranged in a particular manner, as a whole or partially, including the sidings connecting the network with the service facility, in order to enable provision and use of basic services provided in such facilities under the non-discriminatory and transparent conditions.

7.2. Service Facility Overview

Services facilities are:

- 1) station buildings, i.e. a part of station buildings, in passenger stations, intended for railway passengers, and other facilities used in passenger traffic, including the travelling information displays and the appropriate ticketing points;
- 2) freight terminals;
- 3) marshalling yards and train formation tracks, including the shunting tracks;
- 4) tracks for storing intended for railway undertakings' vehicles using the allocated infrastructure capacity;
- 5) maintenance facilities, with the exception of maintenance facilities for high speed trains or other types of rolling stock requiring specific facilities where the works performed are not routine works performed as a part of daily activities and require withdrawal of vehicle from service;
- 6) other technical facilities, including the cleaning and washing facilities;
- 7) inland waterways port facilities connected to railway activities;
- 8) facilities for provision of assistance;
- 9) facilities for fuel storing and supplying for which the prices are presented separately.

7.3. Service Facilities Managed by IŽS

IŽS will enable all railway undertakings, which have been granted the minimum access package of services for the use of infrastructure, to use all the services facilities managed by it in a non-discriminatory manner and upon their request.

7.3.1. Common Provisions

IŽS will enable all the railway undertakings with minimum access package of services to have track access to all the above mentioned services facilities in a non-discriminatory manner and upon their request, provided that railway undertakings have previously entered into a contract on the use of these facilities with facility managers and service providers.

Railway undertakings have to state the need to have track access to service facilities and to use them during the capacity allocation procedure, please refer to Chapter 4.

For the service of track access to service facilities, Railway Undertaking will be obliged to pay a charge to the IŽS based on the Contract for the use of infrastructure.

7.3.2 Use of station buildings in the function of passenger traffic

Appendix 6 contains an overview of locations where passengers may board/get off the train.

The stations along the narrow gauge lines are used for passenger service only.



"Infrastructure of Serbian Railways" will enable the use of station buildings, i.e. the part of station buildings, in passenger stations in the areas intended for railway passengers and of other facilities used for passenger traffic, including the travel information display and adequate location for ticketing services to all railway undertakings in a non-discriminatory manner and upon their request.

The use of parts of service points (station buildings, stops) and other facilities required for acceptance and dispatching of passengers also includes use of platforms and other surfaces required for access of passengers in them, as well as other areas enabling passenger movements between public road surfaces and the train.

The use of travel information displays includes the use of all existing visual information facilities already installed in individual stations.

Upon request of a Railway Undertaking IŽS will, where possible, provide a suitable area for the ticketing services.

7.3.3 Freight Terminals

The term "freight terminals" on the railway network operated by Infrastructure of Serbian Railways (IŽS), means all the railway service points used for freight operations where loading and unloading as transshipment operations are carried out.

The following types of terminals are distinguished: stations and transport forwarding, terminals for intermodal freight transport, port terminals.

Overview of services facilities for freight operations is presented in Appendix 6.

Combined transport on railway network can be performed at terminals for combined transport and at port terminals.

Table No 7: Stations connected to freight terminals

No	Railway station connected to the terminal	Freight terminal for combined transport	Address of freight terminal for combined transport	Terminal operator
1.	Beograd Marshalling yard (Belgrade Marshalling Yard)	ŽIT Beograd	Beograd Marshalling yard, Železnik, Lole Ribara 2.	"ŽIT Beograd" d.o.o., Beograd, Železnik, Lole Ribara 2
2.	Surčin	Nelt	Beograd, Dobanovci, Maršala Tita 206.	"Nelt Co" d.o.o., Beograd
3.	Novi Sad Marshalling yard (Novi Sad Marshalling Yard)	Luka (Port) Novi Sad	Novi Sad, Carinska 1.	"Luka Novi Sad" a.d., Novi Sad, Carinska 1
4.	Pančevo Varoš	Luka (Port) Dunav	Pančevo, Luka Dunav 1.	"Luka Dunav Pančevo" a.d., Pančevo, Luka Dunav 1
5.	Smederevo	Luka (Port) Smederevo	Smederevo, Radinac b.b.	"Luka Dunav – Železara Smederevo" d.o.o., Smederevo, Radinac b.b.
6.	Prahovo Pristanište	Luka (Port) Prahovo	Prahovo, Radujevački put b.b.	"Luka Prahovo IHP Prahovo– Krajina" d.o.o., Prahovo, Radujevački put b.b.
7.	Senta	Luka (Port) Senta	Senta, Pristanišna 1.	"Luka Senta" a.d., Senta,



				Pristanišna 1
8.	Sremska Mitrovica	II lika (Port) Leget	Sremska Mitrovica, Jarački put 10.	"RTC Luka Leget" a.d., Sremska Mitrovica, Jarački put 10
9.	Nanac	Luka (Port) Zorka Šabac	Šabac, Narodnih heroja 1.	"Zorka transporti" d.o.o., Šabac, Narodnih heroja 1
10.		MBOX Terminals d.o.o	Freight-transport terminal in Niš Vojlovački zaseok 4 St. 18560 Popovac (Niš)	MBOX Terminals d.o.o

IŽS does not operate nor provide basic services in any freight terminal within the meaning of its definition of an arranged and organized area where the receiving, storage, preparation, transshipmenthipment and dispatching of various types of goods is carried out.

For more detailed information on the services provided by the freight terminal operator or the service provider, the following entities should be contacted:

1) Železnički integralni transport Beograd - ŽIT BEOGRAD d.o.o.

Addresses: Beograd Marshalling Yard (Belgrade Marshalling Yard), Lole Ribara 2 Železnik, Belgrade and Hajduk Veljkov Venac 4/1

11000 Belgrade, Serbia

Contact details: +381 (0)11 361-6844, +381 (0)-1 361 - 6842, +381 (0)64 81040.

2) "Nelt Co." d.o.o. Beograd

Address: Maršala Tita 2016, 11272 Dobanovci, Belgrade

Contact details: +381 (0)11 3779-143, office@nelt.com, www.neltlsp.com

Information on the service facility operated by Nelt Co, i.e. on the industrial siding which is a part of Nelt terminal is provided in Appendix 3.10a.

3) DRY PORT TERMINALS DOO

Addresses: Luka Dunav 1, 26000 Pančevo and Uzun Mirkova 3/3, 11000 Belgrade Contact details: + 381 69 32 55 012, office@dpterminal , http://dpterminals.rs Information on the service facility are available on http://dpterminals.rs//

4) "MBOX Terminals" d.o.o

Address: Freight-transport terminal in Niš, Vojlovački zaseok St 4, 18560 Popovac (Niš)

Contact details: +381603593499 e-mail: operations@mboxt.com

Information on the service facility are available on https://mboxt.com

IŽS however provides the use of service points open for freight traffic, in accordance with Appendix 6 of this document, for loading, unloading and transshipmenthipment to all railway undertakings in a non-discriminatory manner and upon their request.



7.3.4 Marshalling Yards and Train Formation Facilities, including Shunting Facilities

Freight train formation yards

Freight trains may be split-up and formed at the marshalling, distribution and intermediate stations/yards, according to the user needs and requirements, and taking into account the particular technical and organizational restrictions.

For all trains not entering the Belgrade Marshalling Yard, certain distribution station operations will be taken over by Ostružnica and Resnik stations.

For all trains not entering the Lapovo Marshalling Yard, certain distribution station operations will be taken over by Lapovo station.

Tomaševac station will take over certain distribution station operations.

Overview of distribution stations-sections for freight trains operation

Distribution Station	Distribution Section	Comments
1	2	3
BELGRADE MARSHALLING YARD	Belgrade Marshalling Yard- Pančevo Main St. Belgrade Marshalling— Yard - Ruma Belgrade Marshalling Yard- Lapovo Marshalling Yard Belgrade Marshalling— Yard— (Mala Krsna) ¹⁾ — Lapovo Marshalling Yard Belgrade Marshalling— Yard— Mala Krsna Belgrade Marshalling Yard- Požega Belgrade Marshalling Yard— Novi Sad Marshalling Yard	For the trains not entering the Mala Krsna station
BOGOJEVO	Bogojevo - Sombor Bogojevo - Novi Sad Marshalling Yard Bogojevo - Erdut (HŽI)	
BOR FREIGHT STATION	Bor Freight St Požarevac Bor Freight St Zaječar Bor Freight St Prahovo pristanište	
BIJELO POLJE	Bijelo Polje –(ŽICG) - Vrbnica -	
(ŽICG)	Prijepolje Freight St.	
BRASINA	Brasina - Ruma Brasina - Zvornik ¹⁾ Brasina - Zvornik Novi (ŽRS)	1) in both directions
VRŠACVršac - Pančevo st. Vršac - Stamora Moravita (CFR SA)		
DIMITROVGRAD	Dimitrovgrad – Niš Marshalling Yard Dimitrovgrad –Kalotina Zapad	
ERDUT (HŽI)	Erdut–(HŽI) - Bogojevo	
JIMBOLIA (CFR)	Jimbolia (CFR SA) - Kikinda	
ZAJEČAR	Zaječar - Niš Marshalling Yard Zaječar - Prahovo Pristanište Zaječar - Bor Freight St.	



ZVORNIK NOVI (ŽRS)	Zvornik Novi (ŽRS) - Brasina	
(====)	Zrenjanin - Kikinda	
	Zrenjanin - Novi Sad Marshalling	
	Yard	
ZRENJANIN	Zrenjanin - Pančevo Main St.	1) for the trains not entering
	Zrenjanin – Senta	the Senta station
	Zrenjanin – (Senta) ¹ – Subotica Freight	
	St.	
	Kikinda – Jimbolia (CFR SA)	
	Kikinda – Zrenjanin	1) for the trains not entering the
KIKINDA	Kikinda – Senta	Senta station
	Kikinda – (Senta) ¹ – Subotica Freight	Senta station
	St.	
KOSOVO POLJE	Traffic is temporarily regulated by	
11000 / 0 1 0 2 0 2	UNMIK railways	
	Kraljevo - K. Mitrovica Sever ¹⁾	1) in both directions
	Kraljevo - Lapovo Marshalling Yard	2) in both directions
KRALJEVO	Kraljevo - Požega Kraljevo – Stalać ²⁾	3) for the trains not entering the Požega station
	5	Pozega station
	Kraljevo – (Požega) ³⁾ – Prijepolje Freight St.	
	Lapovo Marshalling Yard – Mala	1) in both directions
	Krsna	2) for the trains not entering the
	Lapovo Marshalling Yard – Resavica ¹⁾	Mala Krsna station
	Lapovo Marshalling Yard - Niš	
	Marshalling Yard	
LAPOVO	Lapovo Marshalling Yard - Kraljevo	
MARSHALLING YARD	Lapovo Marshalling Yard – Resnik -	
	Pančevo Main St.	
	Lapovo Marshalling Yard (Mala Krsna) ²⁾ Belgrade Marshalling Yard	
	Lapovo Marshalling Yard – Belgrade	
	Marshalling Yard	
	Mala Krsna – Požarevac	1) in both directions
	Mala Krsna – Lapovo Marshalling	
	Yard	
MALA KRSNA	Mala Krsna – Belgrade Marshalling	
	Yard	
	Mala Krsna – Smederevo ¹⁾	
	Mala Krsna – Pančevo Main St.	1) in both directions
	Niš Marshalling Yard - Lapovo Marshalling Yard	1) in both directions
NIŠ MARSHALLING	Niš Marshalling Yard - Preševo	
YARD	Niš Marshalling Yard - Dimitrovgrad	
TARD	Niš Marshalling Yard - Zaječar	
	Niš Marshalling Yard – Kuršumlija ¹⁾	
	Novi Sad Marshalling Yard - Belgrade	1) in both directions
	Marshalling Yard	2, III com anochono
	Novi Sad Marshalling Yard- Subotica	
NOVI SAD	ter.	
MARSHALLING YARD	Novi Sad Marshalling Yard- Bogojevo	
	Novi Sad Marshalling Yard –Pančevo	
	Main St.	
	L	L



	Novi Sad Marchalling Vard Transania	
Novi Sad Marshalling Yard - Zrenjanin Novi Sad Marshalling Yard - Ruma		
	Novi Sad Marshalling Yard –	
	Temerin ¹⁾	
	Novi Sad Marshalling Yard –	
	Podbara ¹⁾	
	Pančevo Main St. – Zrenjanin	
	Pančevo Main St Vršac	1) in both directions
	Pančevo Main St Belgrade	2) for the trains not entering the
	Marshalling Yard	Mala Krsna station
	Pančevo Main St. –Novi Sad	
•	Marshalling Yard	
PANČEVO MAIN	Pančevo Main St. –Lapovo	
STATION	Marshalling Yard	
	Pančevo Main St. – Pančevo Vojlovica	
	Pančevo Main St. – Mala Krsna	
	Pančevo Main St. – Maia Krsna Pančevo Main St. – (Mala Krsna) ²⁾ –	
	Lapovo Marshalling Yard	
	Pančevo Main St. –Požega	
pró	Traffic is temporarily regulated by	
PEĆ	UNMIK railways	
POŽAREVAC	Požarevac – Bor Freight St.	
POZAREVAC	Požarevac – Mala Krsna	
	Požega - Belgrade Marshalling Yard	
POŽEGA	Požega - Kraljevo	
POZEGA	Požega - Prijepolje Freight St.	
	Požega - Pančevo Main St.	
PRAHOVO	Prahovo pristanište - Zaječar	
PRISTANIŠTE	Prahovo pristanište - Bor Freight St.	
PREŠEVO	Preševo - Niš Marshalling Yard	
TRESEVO	Preševo - Tabanovce (IŽRSM)	
	Prijepolje Freight St Vrbnica -	1) for the trains not entering the
PRIJEPOLJE FREIGHT	Bijelo Polje (ŽICG)	Požega station
STATION	Prijepolje Freight St. – Požega	
	Prijepolje Freight St. – (Požega) ¹⁾ -	
	Kraljevo	
PRIZREN	Traffic is temporarily regulated by	
	UNMIK railways	
	Ruma - Novi Sad Marshalling Yard	
	Ruma - Belgrade Marshalling Yard	
RUMA	Ruma - Šabac	
	Ruma – Brasina	
	Ruma – Šid	
ROSZKE (MAV ZRT)	Roszke (MAV ZRT) - Horgoš -	
NOOZINE (MAY ZIXI)	Subotica	
	Senta – Subotica Freight St.	
SENTA	Senta - Zrenjanin	
	Senta - Kikinda	
SOMBOR	Sombor - Subotica Freight St.	
	Sombor - Bogojevo	



	Sombor – Vrbas ¹⁾	1) in both directions
STAMORA MORAVITA	Stamora Moravita (CFR SA) – Vršac	
(CFR SA)		
	Subotica Freight St Novi Sad	
	Marshalling Yard	1) For the trains not entering the
	Subotica Freight St Senta	Senta station
	Subotica Freight St Sombor	
SUBOTICA FREIGHT	Subotica Freight St Horgoš -	
STATION	Roszke (MAV ZRT)	
	Subotica Freight St (Senta) -	
	Kikinda ¹⁾	
	Subotica Freight St (Senta) -	
	Zrenjanin ²⁾	
TABANOVCE (IŽRSM)	Tabanovce (IŽRSM) - Preševo	
TOVARNIK (HŽI)	Tovarnik (HŽI) - Šid	
ĐENERAL JANKOVIĆ	Traffic is temporarily regulated by	
DENERAL JANKOVIC	UNMIK railways	
ŠABAC	Šabac - Ruma	
ŠID	Šid - Ruma	
SID	Šid - Tovarnik (HŽI)	

There are four marshalling yards on the network where most of the freight trains are formed and split-up, and these stations are at the same time the distribution stations: Belgrade Marshalling Yard, Lapovo Marshalling Yard, Niš Marshalling Yard and Novi Sad Marshalling Yard.

Due to the limited track capacities and the work organization, the train formation and splitting-up is **not permitted** at the following distribution stations: **Bogojevo**, **Dimitrovgrad**, **Preševo**, **Brasina**, **Šid**, **Mala Krsna and Zrenjanin**. The exception is Šid station where the formation of international freight trains and domestic feeder trains can be performed on the designated industrial sidings. The formation of trains at distribution stations Šabac and Požarevac can be performed only if these stations are loading/unloading stations for such trains.

Splitting up and formation of trains are also permitted at particular intermediate stations having the required track capacities: Velika Plana, Zrenjanin fabrika, Kragujevac, Kruševac, Radinac, Smederevo, Sremska Mitrovica, Crveni Krst and Čačak.

The following intermediate stations may also be the departure/terminal stations provided that they are at the same time the loading/unloading stations for such train: Adrovac, Aleksinac, Aleksandrovo predgrađe, Batočina, Brvenik, Valjevo, Vreoci, Grljan, Despotovac, Doljevac, Dragačevo, Elemir, Zvornik, Inđija, Jagodina, Kaona, Lazarevac, Leskovac, Majdanpek, Mataruška Banja, Odžaci, Pančevo Varoš, Pančevo Vojlovica, Paraćin, Petrovac Gložan, Pirot, Podbara, Prahovo, Prokuplje, Raška, Ristovac, Svilajnac, Svrljig, Stara Pazova, Stalać, Surčin, Ćuprija, Čoka, Užice freight station, Futog. The restriction relating to these stations also prescribes that it is not permitted to leave and gather wagons for the purposes of forming other trains.

If the RU requests that the departure/terminal station is the intermediate station that has not been listed, such requests will be considered separately and decisions will be made on such requests depending on the available infrastructure capacities and organization possibilities at the moment of the request submission.

Passenger train formation yards

Dispatching of passenger trains with classical units formed in the technical-passenger station Zemun is possible in Belgrade Center and Zemun stations. In Zemun station track No 11 is equipped with the ramp for loading and unloading of accompanied cars.



The dispatching stations for the EMU and DMU trains can be all stations for passenger traffic, depending on the available capacities and the traffic service hours.

Overview of distribution stations-sections for passenger trains operation

Distribution station	Distribution section	Comments
1	2	3
BEOGRAD CENTAR	Beograd Centar – Novi Sad	
	Beograd Centar – Ruma	
	Beograd Centar – Pančevo Main St.	
	Beograd Centar - Požega	
	Beograd Centar - Lapovo	
	Bijelo Polje (ŽICG) - Vrbnica -	
BIJELO POLJE (ŽICG)		
,	Prijepolje freight station	
	Bogojevo - Sombor	
BOGOJEVO	Bogojevo - Novi Sad	
BOGOJEVO	Bogojevo - Erdut (HŽI)	
	` /	
VRŠAC	Vršac - Pančevo Main St.	
	Vršac - Stamora Moravita (CFR SA)	
ERDUT (HŽI)	Erdut (HŽI) – Bogojevo	
DIMITROVGRAD	Dimitrovgrad – Niš	
JIMBOLIA (CFR)	Jimbolia (CFR SA) - Kikinda	
	Zaječar – Niš	
ZAJEČAR	Zaječar - Prahovo Pristanište	
	Zaječar – Požarevac	
ZVORNIK	Zvornik – Šabac - Ruma	
	Zrenjanin - Kikinda	
	Zrenjanin - Novi Sad	
ZRENJANIN	Zrenjanin - Pančevo Main St.	
	Zrenjanin - Senta	
	Kikinda - Jimbolia (CFR SA)	
KIKINDA	Kikinda - Zrenjanin	
	Kikinda - Senta	
	Kraljevo – Kosovska Mitrovica Sever ¹⁾	1) in both directions
	Kraljevo - Kosovska Militovica Sever	1) In both directions
KRALJEVO	Kraljevo - Lapovo Kraljevo - Požega	
	Kraljevo – rozega Kraljevo – Stalać ¹⁾	
	Lapovo – Belgrade Center	
LAPOVO	Lapovo - Kraljevo Lapovo - Niš	
	_	
	Lapovo - Smederevo	
	Niš - Lapovo Niš - Preševo	
NITĂ		1) in both dimentions
NIŠ	Niš - Dimitrovgrad	1) in both directions
	Niš – Zaječar	
	Niš - Kuršumlija ¹⁾	
	Novi Sad – Beograd Centar	
	Novi Sad – Subotica	
	Novi Sad – Bogojevo	
NOVI SAD	Novi Sad – Vrbas ¹⁾	
	Novi Sad - Pančevo Main St.	
	Novi Sad – Zrenjanin	



	Novi Sad - Ruma	
PANČEVO MAIN	Pančevo Main St Zrenjanin	
STATION	Pančevo Main St Vršac	1) in both directions
	Pančevo Main St. – Beograd Centar	
	Pančevo Main St Pančevo Vojlov. 1)	
	Pančevo Main St. – Novi Sad ²⁾	
	Požarevac - Lapovo	
POŽAREVAC	Požarevac - Smederevo	
POZAREVAC	Požarevac - Zaječar	
	Požarevac – Beograd Centar	
	Požega - Beograd Centar	
POŽEGA	Požega - Kraljevo	
POZEGA	Požega - Prijepolje freight station	
PRAHOVO	Prahovo pristanište - Zaječar	
PRISTANIŠTE		
PRIJEPOLJE FREIGHT	Prijepolje freight station - Vrbnica -	
STATION	Bijelo Polje (ŽICG)	
	Prijepolje freight station - Požega	
PREŠEVO	Preševo - Niš	
TRESEVO	Preševo – Tabanovce (IŽRSM)	
	Ruma - Šabac - Zvornik	
RUMA	Ruma - Šid	
	Ruma - Beograd Centar	
	Ruma – Novi Sad	
ROSZKE (MAV ZRT)	Roszke (MAV ZRT)-Horgoš- Subotica	
	Senta – Subotica	
SENTA	Senta – Zrenjanin	
	Senta – Kikinda	
SMEDEREVO	Smederevo - Lapovo	
SMEDERE VO	Smederevo - Požarevac	
SOMBOR	Sombor - Subotica	
	Sombor - Bogojevo	
STAMOR MORAVITA (CFR SA)	Stamora Moravita (CFR SA) - Vršac	
	Subotica - Novi Sad	
CIDOTICA	Subotica – Sombor	
SUBOTICA	Subotica - Senta	
	Subotica - Horgoš - Roszke (MAV)	
TABANOVCE (IŽRSM)	Tabanovce (IŽRSM) - Preševo	
TOVARNIK (HŽI)	Tovarnik(HŽI) - Šid	
ŠABACŠabac - Ruma	,	
	Šid – Ruma	
ŠID	Šid – Tovarnik (HŽI)	
	Dia – Tovarink (HZI)	

7.3.5 Storage Sidings

 $I\check{Z}S$ network has the capacities for storing of rolling stock. Rolling stock storing services are provided by the $I\check{Z}S$.



Storing of standard passenger train sets, DMUs, EMUs and locomotives is carried out at all depots for accommodation and storing of rolling stock of "Srbija Kargo" JSC and "Srbija Voz" JSC.

Storing of freight wagons is carried out on special storage sidings for surplus freight wagons at marshalling yards Belgrade Marshalling Yard, Novi Sad Marshalling Yard, Niš Marshalling Yard, Lapovo Marshalling Yard, Subotica, Zaječar, Kikinda, Kraljevo, Pančevo Main St., Požega, Ruma and Sombor.

IŽS is not responsible for any damage which can occur on the rolling stock, that is, on the goods which is located in the stored wagons.

"Infrastructure of Serbian Railways" provides the service of storing of rolling stock to all interested railway undertakings which require storing of rolling stock, in a non-discriminatory manner and upon their request, and to the extent permitted by the infrastructure capacities.

7.3.6 Maintenance facilities

There are rolling stock maintenance facilities on IŽS network, but the maintenance services are not provided by "Infrastructure of Serbian Railways" JSC. Appendix 3.10. contains the details on the rolling stock maintenance facilities.

7.3.7 Other Technical Facilities, including Cleaning and Washing Facilities

"Infrastructure of Serbian Railways" provides the following basic services at technical facilities to railway undertakings in a non-discriminatory manner and upon their request:

Use of wagon scales in stations, where available, according to table 8 of this document;

- Fixed facilities for test braking in station Beograd Ranžirna (Belgrade Marshalling Yard);
- Use of freight loading/unloading ramp;
- Use of ramp for loading and unloading of accompanied cars;
- Use of loading clearance;
- Use of portal crane in Aleksinac station;

The need for using the basic services listed in bullets 1, 3, 4 and 5 must be presented by railway undertakings in the capacity allocation process, whereas the need for other services can be presented in a separate request.

More detailed information on provision of the above stated basic services can be obtained at:

"Infrastructure of Serbian Railways" JSC Traffic Department 6, Nemanjina St 11000 Belgrade, Serbia

Tel.: +381 11 3618 214 Fax: +381 11 3616 814 E-mail: sektor.sp@srbrail.rs

"Infrastructure of Serbian Railways" does not have the special facilities and does not provide the services of rolling stock cleaning and washing.



Wagon scales

The list of stations in which are located wagon scales is given in the Table 8.

Table No. 8: Wagon scales

No.	Station	Carrying Capacity (t)	Length of weigh bridge (m)	NOTE:
1	Šid	100	20	Wagon scale is electronic.
2	Novi Sad Marshalling Yard	100	20	Wagon scale is electronic.
3	Pančevo main st.	100	20	Wagon scale is electronic.
4	Vršac	100	20	Wagon scale is electronic.
5	Zrenjanin Factory	100	20	Wagon scale is mechanic.
6	Subotica Freight St.	100	20	Wagon scale is electronic.
7	Sombor	100	20	Wagon scale is mechanic.
8	Niš Marshalling Yard	100	20	Wagon scale is electronic.
9	Požega	100	20	Wagon scale is electronic.
10	Čačak	80	15.5	Wagon scale is electronic.
11	Lapovo Marshalling St.	100	20	Wagon scale is electronic.
12	Belgrade Marshalling Yard	100	18	Wagon scale is electronic.
13	Dimitrovgrad	100	20	Wagon scale is electronic.

Fixed installations for brake control

Fixed installations for brake control are located at Beograd Marshalling Yard.

Cleaning and washing facilities

IŽS does not have special facilities for cleaning and washing of railway vehicles. The type, volume and place of cleaning of railway vehicles for passenger service are determined by the railway undertaking.

Other technical facilities

- Ramps for loading and unloading of the load

"Infrastructure of Serbian Railways" JSC will enable usage of the ramps for loading and unloading of the load to all railway undertakings on the non-discriminatory way and upon their request. The need for usage of the ramps for loading and unloading of the load must be shown by the railway undertakings' in the capacity allocation procedure.

- Ramps for loading and unloading of the accompanied vehicles

Loading/unloading ramps for transport of accompanied vehicles are located in stations Zemun, Novi Sad, Subotica and Niš. The need for usage of the ramps for loading and unloading of the accompanied vehicles must be indicated by the railway undertakings in the capacity allocation procedure.

- Loading gauge

Loading gauges that are in function are present at the following stations: Novi Sad Marshalling Yard, Vršac, Čačak, Požega, Dimitrovgrad, Jošanička Banja and Kragujevac.

On IŽS network there are more stations with loading gauges which are not in function currently. The correction of the list of loading gauges will be done upon putting malfunction loading gauges into the functional condition.

- Crane portal in Aleksinac station

Transfer station on the territory of IŽS is Aleksinac. Mobile portable crane PD 86 with capacity up to 32 t is used for transshipmenthipment.

Service for using of wagon scales



"Infrastructure of Serbian Railways" JSC provides the wagon scales services. The price for using the wagon scale amounts to 3,309.00 RSD/wagon without VAT.

Service of loading and unloading using the portal crane in Aleksinac station

The service of loading and unloading using the portal crane together with the staff of public railway Infrastructure Manager is defined by means of a separate contract concluded between the public railway Infrastructure Manager and the Railway Undertaking, i.e. the user of the said service.

Unit price for the use of portal crane for loading and unloading amounts to 150,00 RSD/net tonne of goods VAT exclusive.

IŽS is providing other basic services if required by the railway undertaking and subject to a special contract. Other basic services that can be provided are:

• manning of facilities

Manning of unmanned service points

Structure of manning of non-manned service points, upon the railway undertaking's request, consists of:

- manning of service points of public railway infrastructure manager upon the railway undertaking's
 request in function of traffic management or shunting movements in such service points outside the
 working hours for such service point, and
- manning of service points of the railway undertaking upon its request in function of traffic management or shunting movements in such service points because the railway undertaking does not possess adequate traffic staff.

Charge for manning of service points by traffic staff amounts to:

Work place	Train dispatcher	Switch operator
Price in RSD/hour VAT exclusive	1.236,00	955,00

Calculation for periods of manning of non-manned service points starts from the moment of takeover of service at the service point until the moment of handover of service for the purposes of train operation i.e. shunting movement of railway undertaking's train set, and in case of temporarily manned stations (station working hours with interruption) not taking into account the period when the station is manned during the working hours according to the timetable booklet.

In the stations where it is necessary to perform manning with the train dispatcher and the switch operator, the manning period is the same for both employees given the responsibility of both worker during the setting up of a train route.

7.3.8 Maritime and Inland Port Facilities

The following ports are connected to public railway network:

- Port area Novi Sad

Operator: DP World AD Novi Sad, www.lukanovisad.rs

Information on the service facility are available at https://www.dpworld.com/en/serbian/general-terms-and-conditions

- Port area Smederevo

Operator: HBIS GROUP Serbia Iron & Steel d.o.o. Beograd, www.hbisserbia.rs

- Port area Pančevo

Operator: Port "Dunav" AD Pančevo



Granexport d.o.o.<u>www.granexport.rs</u> Specijalna luka d.o.o.

Information on the service facility are available at www.specijalnaluka.rs

- Port area Prahovo

Operator: PD Elixir Prahovo, https://www.elixirprahovo.rs

Information on the service facility are available at www.elixirprahovo.rs/logistika and www.elixirgroup.rs/usluge/logistika/luka-prahovo/

- Port area Senta

Operator: Port Senta A.D.,

Information on the service facility are available at www.luka-senta.rs

- Port area Sremska Mitrovica

Operator: RTC Luka Leget AD, https://www.leget.rs

- Port area Šabac

Operator: PD Elixir Zorka

Information on the service facility are available at https://www.elixirzorka.rs and www.elixirgroup.rs/usluge/logistika/luka-sabac/

7.3.9 Relief Facilities

IŽS has on its disposal a mobile relief facility – relief (auxiliary) train. The services of relief train in cases of remedying the consequences of accidents or incidents are provided by IŽS, using its relief trains and staff, located in Belgrade, Niš and Kraljevo. In order to use the relief train services, a Railway Undertaking must address IŽS in writing:

Center for relief train operations

6, Nemanjina St

11 000 Belgrade, Serbia Tel: +381 11 3620 899 Fax: +381 11 3620 899

Email: direktor.tkp@infrazs.rs

Price of services regarding the provision of relief assistance

The price for providing the basic service regarding the provision of relief assistance is determined based on the actual costs incurred during the provision of such service and it is applied in a non-discriminatory manner for all railway undertakings.

The price of transporting the relief train from the domicile station to the place of work and return to the domicile

No	Means of transport	Measuring unit	Price in RSD, VAT exclusive
1	Traction vehicle - locomotive of the operator – in operation, maneuver or expectation of operation		According to the operators bill
2	Vehicle of the working unit (ZOP, ETP, SP,) within "IŽS" – trolley, truck, etc.		According to the account of the working unit "IŽS" which performed transport



3	GEISMAR road-rail vehicle type V2R-730-S – road driving	hour	15.156,00
4	GEISMAR road-rail vehicle type V2R-730-S – railway driving	hour	18.156,00
5	Traction vehicle – locomotive "IŽS" or locomotive leased (locomotive operation + staff operation + energy) -in operation	hour	41.000,00
	-in expectation of operation	hour	15.000,00

Price for equipment and tools for the operation of relief (auxiliary) train

No	Asset description	Type of work	Measu ring unit	Price in RSD, VAT exclusive
1	Relief train	Expecting of work	hour	2.000,00
2	Relief train	Work on preparation and retrieval of intervention equipment	hour	4.000,00
3	GEISMAR road-rail vehicle type V2R-730- S	Work during intervention	hour	15.156,00
4	Jack EDK 1000 (99 72 9 471 001-4)	Expecting of work	hour	5.000,00
5	Jack EDK 300 (99 72 9 471 101-2)	Expecting of work	hour	5.000,00
6	Jack DHPD 65 (99 72 9 571 001-3)	Expecting of work	hour	5.000,00
7	Jack EDK 1000 (99 72 9 471 001-4)	Preparation, Work, Retrieval	hour	56.970,00
8	Jack EDK 300 (99 72 9 471 101-2)	Preparation, Work, Retrieval	hour	27.248,00
9	Jack DHPD 65 (99 72 9 571 001-3)	Preparation, Work, Retrieval	hour	30.146,00
10	LUKAS equipment	Preparation, Work, Retrieval	hour	7.066,00
11	WALTER trolley	Installation and removal	hour	6.000,00
12	WALTER trolley	Transport	hour	3.320,00
13	WALTER trolley	Remaining of trolley under the rolling stock – lump sum	hour	600,00
14	Stable power generation unit	Work	hour	2.400,00

Note: operating time is calculated in full hours - each started working hour of equipment and assets is counted as a full working hour.

Labour costs for relief train's staff

No	Type of work	Measur ing unit	Price in RSD VAT exclusive
1	Assistant on relief train	hour	704,00
2	Electromechanic	hour	981,00
3	Driver and operator of a two-way motor vehicle	hour	1.016,00
4	Rail crane operator	hour	1.027,00
5	Hydraulic equipment operator	hour	1.027,00



6	Locksmith on the relief train	hour	1.027,00
7	Rail vehicle mechanic	hour	1.027,00
8	Relief train manager	hour	1.126,00
9	Expert associate for circuit inspection	hour	1.175,00
10	Assistant relief train chief	hour	1.282,00
11	Relief train chief	hour	1.605,00
12	Employees participating in the work of relief train	pcs	1.800,00

Note: operating time is calculated in full hours – each started working hour is counted as a full working hour.

7.3.10 Refuelling Facilities

"Infrastructure of Serbian Railways" JSC is providing the services of fuel storing and issuing for refuelling of traction vehicles of all railway undertakings.

This relates to refuelling facilities at service points – stations and depots:

Pančevo main St., Lapovo, Kraljevo, Požarevac, Požega, Sombor, Kikinda, Belgrade Marshalling Yard, Crveni Krst, Ruma, Zaječar, Zrenjanin, Vršac and Subotica.

Detailed information on the services of fuel storing and issuing for refuelling of traction vehicles are available at:

Department for Procurement and Central Warehousing 6, Nemanjina St 11 000 Belgrade, Serbia Tel: +381 11 3620 094

Email: nabavke.infra@srbrail.rs

Price for the service of storing and refuelling

The price for the service of fuel storing and issuing for the purposes of refuelling of traction vehicles of all railway undertakings is determined based on the actual costs incurred during the provision of this service and is applied in a non-discriminatory manner for all railway undertakings.

The service of fuel storing and issuing for the purposes of refuelling of traction vehicles amounts to 5.43 RSD per stored litre of diesel fuel VAT exclusive.




APPENDICES

- 1. Organizational chart of "Infrastructure of Serbian Railways" JSC
- 2. Internal regulations (documents) and technological procedures
- 3.1 Loading gauge JŽ I
- 3.2 Loading gauge UIC-GA
- 3.3 Loading gauge UIC-GB
- 3.3a Loading gauge UIC-GC
- 3.4 Electrified lines
- 3.5 Power supply facilities
- 3.6 Overview of signalling & safety devices equipping level
- 3.7 Overview of telecommunication devices equipping level
- 3.8 List of stations with industrial sidings on which it is possible to handle dangerous goods (RID goods)
- 3.8 b List of service points where it is possible to perform transshipment of dangerous goods
- 3.9 Alternative transport routes
- 3.10 Facilities for rolling stock maintenance
- 3.11 Railway infrastructure development projects
- 4.1 Request for train path allocation (form)
- 4.1.b Template for submission of traction vehicle technical data
- 4.2 Instructions for completion of Request for train path allocation (form)
- 4.3 Deadlines for annual 2024/2025 Timetable preparation
- 4.4 Deadlines for amendment of annual 2024/2025 Timetable
- 5.1. Overview of railway lines on which train running is possible when they are manned only with engine driver
- 5.2. Overview of the lines fulfilling the conditions for train running with an engine driver only
- 5.3. Geometry of pantograph (current collector) TYPE POS 254/III used on IŽS network
- 6. Register of infrastructure data
- 7. Overview of primary train delay causes
- 8. Overview of platforms and arranged surfaces in service points
- 9. Method for calculation of electricity consumption for train traction
- 10. Railway node boundaries



Appendix 1: Organizational chart of "Infrastructure of Serbian Railways" JSC

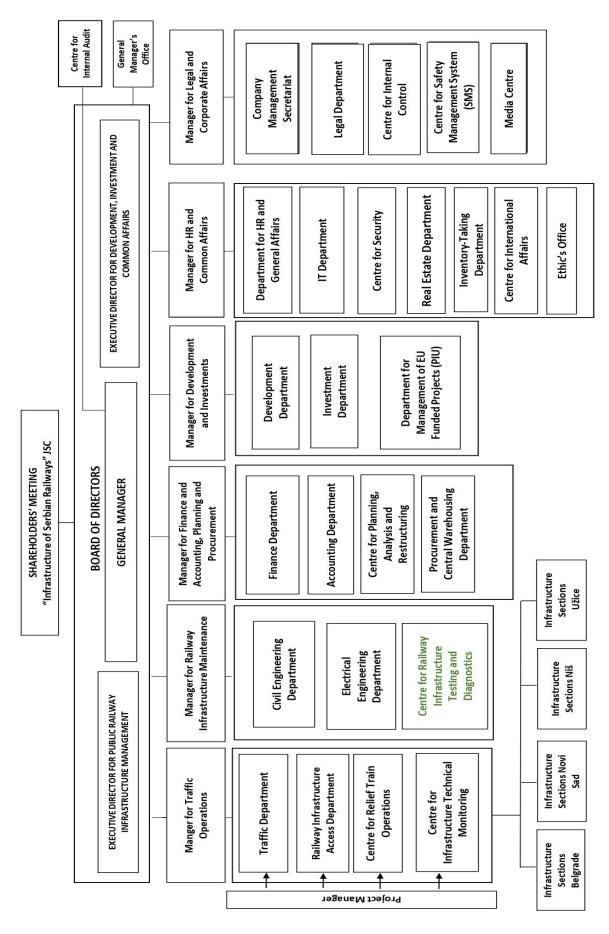



Appendix 2: Internal regulations (documents) and technological procedures


The internal regulations (documents) and the technological procedures applied by IŽS are listed in the Registry of regulations of importance for traffic safety i.e. in item 1.3 Internal general regulations of "Infrastructure of Serbian Railways" JSC.

The registry of regulations of importance for traffic safety is published on the web site of "Infrastructure of Serbian Railways" JSC in section About us/Library/Regulations/Safety Management System/Appendices to the Safety Management System Rules of Operation/Appendix 12.1 Library- Registry of regulations (О нама/Библиотека/Правиници/Систем управљања безбедношћу/Прилози Пословника система управљања безбедношћу/ Прилог 12.1 Библиотека-Регистар прописа).

Available on link https://infrazs.rs/izs-osnovni-podaci/biblioteka




Appendix 3.1. Loading Gauge ŽS I

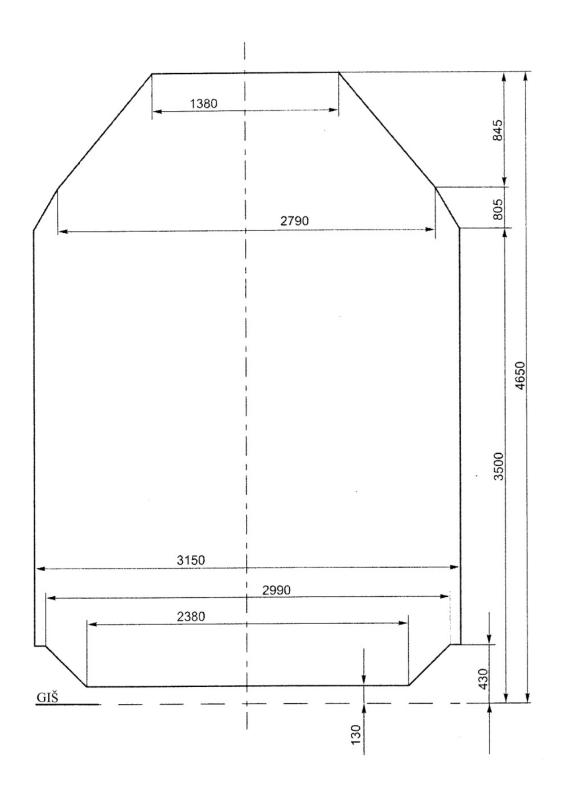




Appendix 3.2. Loading Gauge UIC-GA

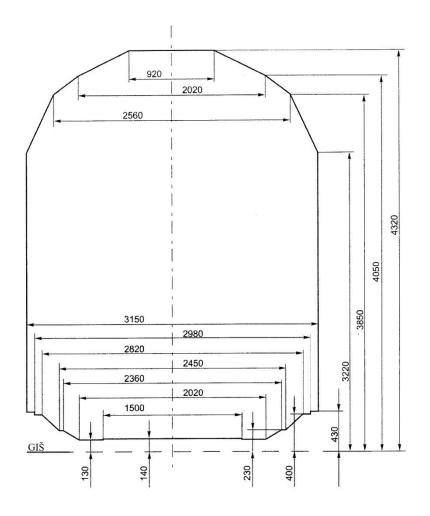




Appendix 3.3. Loading Gauge UIC-GB

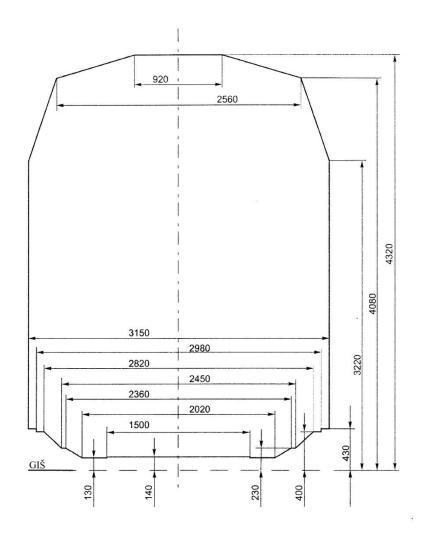



Appendix 3.3a Loading Gauge UIC-GC

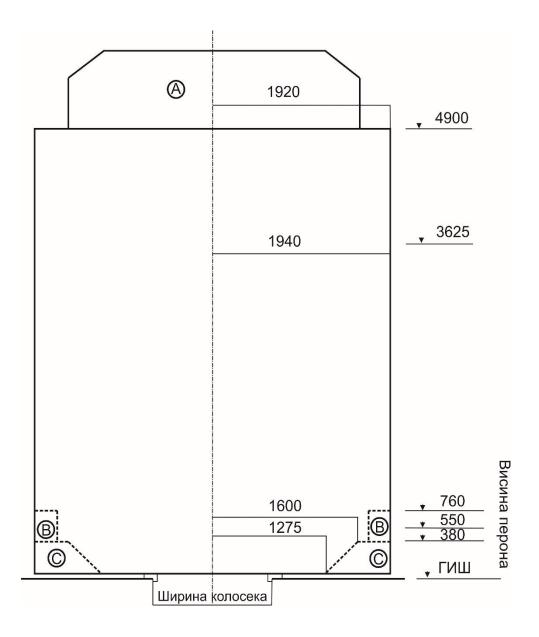

A – Pantograph movement space



B – Area for positioning of platforms according to leaflet UIC 505-4, for the speeds of up to 200 km/h

C – Possibility of reserving the space for low platforms and specific installations

Appendix 3.4. Electrified lines

Main lines:

- 1. Beograd Centar Stara Pazova Šid State Border (Tovarnik)
- 2. Beograd Centar Rasputnica G Rakovica Mladenovac Lapovo Niš Preševo State Border (Tabanovce)
- 3. (Beograd Centar) Rakovica Jajinci Mala Krsna Velika Plana
- 4. (Jagodina) Rasputnica Ćuprija Ćuprija Paraćin
- 5. (Beograd Centar) Stara Pazova Novi Sad Subotica State Border (Kelebia)
- 6. Niš Dimitrovgrad State Border (Dragoman):
 - electrified on section Dimitrovgrad State Border
- 7. Beograd Centar Pančevo Main St. Vršac State Border (Stamora Moravita):
 - > electrified on section Beograd Centar Pančevo varoš
- 8. (Beograd Centar) Resnik Požega Vrbnica State Border (Bijelo Polje)
- 9. Beograd Marshalling vard "A" Ostružnica Batajnica
- 10. Beograd Marshalling yard "B" Ostružnica
- 11. Beograd Marshalling yard "A" Rasputnica "B" Rasputnica "K/K1" Resnik
- 12. Ostružnica Rasputnica "B" (Rasputnica "K/K1")
- 13. Beograd Marshalling yard "B" Rasputnica "R" Rasputnica "A" (Resnik)
- 14. (Beograd Marshalling yard "B") Rasputnica "R" Rakovica
- 15. Beograd Marshalling yard "A" Rasputnica "T" Rakovica
- 16. Beograd Marshalling yard "B" Rasputnica "T" (Rakovica)
- 17. connecting track in the area of Rasputnica "K/K1": (Rasputnica "B") skretica "K" skretnica "K1" (Jajinci)
- 18. (Rasputnica Pančevački most) Rasputnica Karađorđev park Rasputnica Dedinje (Rasputnica G)
- 19. Inđija Golubinci
- 20. Novi Sad Novi Sad Marshalling yard Rasputnica Sajlovo
- 21. bypass track of station Mala Krsna: (Kolari) branching turnout 1 branching turnout 28 (Osipaonica)
- 22. Rasputnica Lapovo Varoš Lapovo Marshalling yard Lapovo
- 23. Trupale Niš Marshalling yard Međurovo
- 24. Crveni krst Niš Marshalling vard
- 25. Niš Rasputnica most (Niš Marshalling yard)

Regional lines:

- 1. Topčider Putnička (4+195) Rasputnica G Rakovica³
- 2. Novi Sad Odžaci Bogojevo:
 - > electrified on section Novi Sad Sajlovo
- 3. Stalać Kraljevo Požega:
 - electrified on section Kraljevo Požega
- 4. connecting track to station Požega: (Uzići) branching turnout No 53 branching turnout No 54 (Dragačevo)
- 5. Smederevo Rasputnica Jezava Radinac Mala Krsna
- 6. Mala Krsna Bor Rasputnica 2 (Vražogrnac):
 - ➤ electrified on section Mala Krsna Požarevac
- 7. Subotica Horgoš State Border (Röszke)

³ By virtue of the Conclusion of the Government of the Republic of Serbia No 340-2989/2022 dated April 7th, 2022, the Decision of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways" Belgrade on termination of railway traffic, dismounting and reconstruction of infrastructure capacities on Topčider Putnička (km 4+195 – Junction "G" – (Rakovica), has been approved.



_

Local lines:

- 1. Novi Sad Novi Sad ložionica:
 - > electrified on section Novi Sad Blok 3 Novi Sad
- 2. Pančevo Varoš Pančevo Vojlovica



Appendix 3.5 Power supply facilities

No	Facilities	Chainage
Main 1	Line 101 Beograd Centar – Stara Pazova – Šid – State Border– (Tovarnik)	
1.	EVP Zemun	009+671
2.	PSN Batajnica	021+735
3.	PS Stara Pazova	035+000
4.	EVP Inđija	043+015
5.	PS Putinci	053+600
6.	PSN Ruma	066+245
7.	PS Sremska Mitrovica	081+700
8.	EVP Martinci	094+200
9.	PS Kukujevci	105+000
10.	PS Šid	116+400
Main	Line 102 Beograd Centar – Mladenovac – Lapovo – Niš – Preše	vo – State Border–
(Tabaı	novce)	
11.	PSN Košutnjak	007+726
12.	PS Rakovica	008+656
13.	PS Kijevo	010+128
14.	EVP Resnik	014+020
15.	PS Klenje	024+800
16.	PSN Ralja	032+340
17.	PS Sopot Kosmajski	041+565
18.	EVP Mladenovac	053+100
19.	PS Glibovac	074+000
20.	PSN Mala Plana	084+350
21.	PS Plana	089+700
22.	EVP Markovac	099+345
23.	PS Lapovo Varoš	106+309
24.	PS Lapovo Putnička	109+207
25.	PSN Bagrdan	119+122
26.	EVP Jagodina	136+262
27.	PS Ćuprija	148+200
28.	PS Paraćin	154+971
29.	PSN Sikirica	165+025
30.	PS Stalać	176+154
31.	PS Braljina	186+600
32.	EVP Đunis	195+130
33.	PS Korman	205+540
34.	PS Aleksinac	214+077
35.	PSN Grejač	223+479
36.	PS Trupale	234+104
37.	PS Niš	243+287
38.	EVP Niš	248+755
39.	PS Doljevac	261+410
40.	PSN Pečenjevce	276+752
41.	PS Leskovac	287+910
42.	EVP Grdelica	300+580
43.	PS Džep	319+561
44.	PSN Suva Morava	332+860
45.	PS Vranjska Banja	347+765
46.	EVP Ristovac	365+370
47.	PS Bukarevac	386+617



48.	PSN Tabanovci	400+060	
	ne 103 (Beograd Centar) – Rakovica – Jajinci – Mala Krsna – Velika Plana	1	
49.	PS Beli Potok	017+800	
50.	PSN Vrčin	026+400	
51.	PS Mali Požarevac	042+800	
52.	EVP Vodanj	056+700	
53.	PS Mala Krsna	070+600	
54.	PSN Lozovik	086+000	
	ne 105 (Beograd Centar) – Stara Pazova – Novi Sad – Subotica – State Bo		
55.	PS Inđija	042+230	
56.	PSN Beška	051+880	
57.	PS Sremski Karlovci	066+480	
58.	PS Novi Sad	077+670	
59.	EVP Novi Sad	081+0209	
60.	PS Kisač	091+602	
61.	PSN Zmajevo	105+045	
62.	EVP Vrbas	120+135	
63.	PS Lovćenac	127+824	
64.	PSN Bačka Topola	142+745	
65.	PS Žednik	157+926	
66.	EVP Naumovićevo	168+590	
67.	PS Subotica	177+262	
68.	PSN Kelebija	184+398	
Main Li	ne 107 Beograd Centar – Pančevo Main St. – Vršac – State Border– (Stam	ora Moravita)	
69.	PS Beograd Centar	000+000	
70.	PS Pančevački Most	004+687	
	ne 108 (Beograd Centar) – Resnik – Požega – Vrbnica – State Border– (Bi		
71.	PS Barajevo	015+420	
72.	PSN Stepojevac	029+610	
73.	PS Lazarevac	045+310	
74.	EVP Slovac	059+248	
75.	PS Valjevo	077+905	
76.	PSN Lastra	093+056	
77.	PS Ražana	111+239	
78.	EVP Kosjerić	118+229	
79.	PS Požega	140+420	
80.	PSN Uzići	150+295	
81.	PS Užice – teretna	162+319	
82.	EVP Sušica	178+379	
83.	PS Zlatibor	193+407	
84.	PSN Jablanica	206+350	
85.	PS Priboj	225+338	
86.	EVP Pribojska Banja	232+750	
87.	PS Bistrica	241+248	
88.	PSN Prijepolje	257+226	
89.	PS Lučica	264+695	
90.	EVP Brodarevo	273+360	
91.	PS Vrbnica	285+096	
Main Line 111 Beograd Marshalling yard "A" – Ostružnica – Batajnica			
92.	PS Železnik – ulaz	001+290	
93.	PS Železnik – izlaz	002+615	



94.	PSN Surčin	013+485
Regiona	l Line 213 Stalać – Kraljevo – Požega	
95.	EVP Kraljevo	080+565
96.	PSN Ovčar Banja	120+900
	Regional railway line 201 Subotica – Horgoš – State Border – (Röszke)	
97.	PS Bački Vinogradi	15+717

Remote	control centers	
98.	Centar DU Beograd	M2: 005+145
99.	Centar DU Niš	M2: 243+560
100.	Centar DU Novi Sad	M4: 078+038

Abbreviations:

EVP - Electric traction substation

PSN - Track sectioning post with neutral line

PS - Track sectioning post

CDU - Remote control center



Appendix 3.6 Overview of signaling & safety devices equipping level

	Manual positioning of fundants of mund off no	24									T		T			T																					T					
g yards	Contral positioning of furnout on the hump	23	64																										Ħ					8								
Devices in marshalling yards	To gainoitised observable of quand odt no tuomut	33	77										1			100000	55				1																T					
Devices in	Marchalling yards without automatic marshalling	21	177								T		T				-										T		-													
	Marshalling yards with automatic marshalling	00	0.7								Ī		T														Ī										Ī			Ī		
Signal equipped	EngislasinahooM 8	10	7												3.																						14.16					
Signal e	lengis idgi J	18	91	200	363	170	187		1111	203			9	10	11	2	9	2	2	2	9	9	2			4		2	14	4					2000							
thor	Mechanical signal	17	7.7				2	20				30	91																П			4	20	5	×	=	1		6	-		
40	Light signal	16	217	100	196	66	73	m	103	177		12	13	9	-	1	4	7	1	-	-		_		6	4	- 4		28	2	m	1	Ξ	3	7	4	-	Ц	14	43		
Main	Mechanical signal	15	2				7	20	19		+	37	49	L	Ц	1	4	1		4	1		_				Щ	_	Щ	Ц	1	=	26	7	×	=	1	Ц	10	=		L
_	lengis idgid	14	182	911	419	160	292	25	113	307		20	18	10	21	7	9	7	2	2	9	9	2		9	4		2	84 4		+	1	17	16	1	000	ů.	Ц	23	64		L
out heating	Cas Full Class	13	CY								-		1								\downarrow																\downarrow	\prod				
Inn	means of tumout lock	13	40	H	961 (79	85	_	79	104	1	7			\parallel	+	-	+		+	+	ю	+		9	2			κ -	1	m						+		(m)/A	 		
Δ	On-site control and interlocking b	-	92		180		138		87			247	83				15	1			1				39+6		77		36			27	253	32	00	73	2	Ц	92	195		
G. WAR	On-site control and interlocking by means of electrical controller	10	NT.				25																																			
The state of the s	Central control desk and interlocking by means of mechanical devices	0	`				4		×				63																			4		7		∞	ı					
ı	Central control desk and interlocking by means of electrical positioning devices	×	341	000	639	151	171		116	306		91	19		32	2				_	132	3				4			44	100	4		7	61	6		T		8	22		
-1	Mechanical devices without signal furmout dependence	7	,				1	9	5			15	1			t		T			Ť		T						Ħ	Ħ		-	6	9		000	,	П	2	-		
	Electrical devices without signal- furmout dependence	9	-		1		2	12	-		1	4	-			\dagger		1		+	t		t		-		-		\parallel			t	3	1	,	-			7	-		
ч	Electrical-mechanical devices with signal-furmout dependence	5	0		1			27	-			-	00												2				-			-		1		2	ı		2	7		
	Incomplete relay interlocking	4	+								T		T																					1			İ	Ī				
10	Complete interlocking with relay electronic devices	ce	15		22	15	17	2	2	34		2	-		2	2	-			,	- -	-							7	1	-		-	-	-				1	×		
	RAILWAY LINES	c	Beograd - Stara Pazova - Šid - State Border - (Tovarnik)		Tabanovcc)	Beograd) - Rakovica - Jajinci - Mala Krsna - Velika Plana	Beograd) - Stara Pazova - Novi Sad - Subotica - State Border -	Niš - Dimitrovgrad - State Border - (Dragoman)	Beograd Centar - Pančevo glavna stanica - Vršac - State Border -	(Stantora Protavita) (Bicograd) - Resnik - Požega - Vrbnica - State Border - (Bitelo Polic)	anovo - Kralievo - Lešak - Kosovo Polie - Đeneral Janković - State	Border - (Volkovo)	Subotica - Bogojevo - State Border - (Erdut)	Beograd Centar - Rasputnica G - (Rakovica)	Beograd Ranžirna "A" - Ostružnica - Batajnica	ograd Ranzima "B" - Ostruznica	Beograd Ranžirna "A" - Rasputnica "B" - Rasputnica "K/K1" - Resnik	Ostružnica - Rasputnica "B" - (Rasputnica "K/K1")	Beograd Ranžirna "B" - Rasputnica "R" - Rasputnica "A" - (Resnik)	Beograd Ranžirna "B") - Rasputnica "R" - Rakovica	Beograd Ranžirna "A" - Rasputnica "T" - Rakovica Beograd Ranžirna "B" - Rasputnica "T" - (Rakovica)	vezni kolosek na području Rasputnice "K/K1": (Rasputnica "B") -	Returca N skretinca N (Jajinci, Topčider - Rasputnica Savski most - (Novi Beograd)	Topčider - Beograd spoljna - Beograd Dunav - Rasputnica Pančevački most	obilazni kolosek stanice Beograd Spoljna: (Topčider) - Blok 1 "Obala" - Blok 2 "Prelaz" - (Boograd donii grad)	(Rasputnica Pančevački most) - Rasputnica Karadordev park - Rasputnica Dedinie - (Rasputnica G)	Indija - Golubinci Novi Sad - Novi Sad Banžirna - Basmumica Sailovo	obilazni kolosek stanice Mala Krsna: (Kolari) - odvojna skretnica 1 - odvojna skretnica 28 - (Osimannica)	Resputing Lapovo Varios provincia - Lapovo Frankina - Lapovo Trombie - Nië ranžima - Lapovo	Civeni krst - Niš ranžima	Nis - Rasputinea most - (Nis ranžirma) Spojni kolosek stanice Niš: (Crveni krst) - odvojna skretnica 2 - odvojna	Skretinca + - (Cele kina). Subotica - Horgoš - State Border - (Roszke)	Pančevo Glavna stanica - Zrenjanin - Kikinda - State Border - (Jimbolia)	Banatsko Miloševo - Senta - Subotica	Pančevo Varoš - Rasputnica 2a - (Jabuka) Novi Sad - Odžaci - Bogojevo	(Novi Sad) - Basputnica Sailovo - Rimski šančevi - Orlovat stajalište	Novi Sad Ranžirna - Sajlovo Rasputnica	lovat - Rasputnica 1a - (Lukicevo)	Ruma - Sabac - Rasputnica Donja Borina - State Border - (Zvornik Novi)	(Platičevo) - Rasputnica 1 - Rasputnica 3 - (Štitar) Stalać - Kralievo - Požega	spojni kolosek stanice Kraljevo: (Mataruška Banja) - odvojna skretnica hroj 72 - odvojna skretnica hroj 73 - Adrani)	spojni kolosek stanice Počega: (Uzići) - odvojna skretnica broj 53 -
_	Каіјмаў Гіпс Мо	0		_	102 (Ta	03 (Br	104 (Be	105 Niš	106 Bec	107 (Be	_		109 Sut		12 Be	$\overline{}$	\neg	_	116 Bec	17 (B	18 Be	120 vez	121 Top	122 Topči	28 obj	31 (Ra	125 Ind	$\overline{}$	128 Ras	1	131 Nis	201 Sut	202 Par	203 Bar	204 Par	1	-	- 20	209 Rui No	210 (Plz	212 spo	oro cre
							=	1=	. =			- I																														1 0



94

Complete intercheduling spring of the national dependency of the national d
Devices in manufacture field with relay of complete interchocking by the complete in
The complete indicates and the coloring arithmetic dependent of the coloring arithmetic series of the coloring arithmetic series indicated and the coloring arithmetic series indicated and the coloring arithmetic series in dependence and the coloring arithmetic series are also and the coloring arithmetic series and the coloring arithmetic serie
The complete indicates and the coloring arithmetic dependent of the coloring arithmetic series of the coloring arithmetic series indicated and the coloring arithmetic series indicated and the coloring arithmetic series in dependence and the coloring arithmetic series are also and the coloring arithmetic series and the coloring arithmetic serie
Complete interlocking with relay or complete complete state of the signal interlocking with relay or complete complete state of the signal interlocking with relay or complete state of the signal interlocking by the signal interlocking
Complete includacing with relay of the complete relay includes includes in the relay of the complete relay includes included includes and dependence. Multiple dependence Particular
Complete includacing with relay of the complete relay includes includes in the relay of the complete relay includes included includes and dependence. Multiple dependence Percentage
Complete includacing with relay of the complete relay includes includes in the relay of the complete relay includes included includes and dependence. Multiple dependence Percentage
Complete relay intortocking with relay of the complete relay intortocking without signal-intortocking by means of clearnical devices and mechanical devices make the complete relay intortocking by means of clearnical devices and mechanical devices and mechanic
Complete interdocking with relay of the complete interdocking by means of electrical control desk and interdocking by means of electrical control desk and interdocking by means of electrical control and interdocking control and interdocking control and interdocking cont
Complete interdocking with relay of the complete interdocking by means of electrical control desk and interdocking by means of electrical control desk and interdocking by means of electrical control and interdocking control and interdocking control and interdocking cont
Complete interlocking with relay of the control and interlocking by means of electrical control and interlocking by means of electrical control and interlocking by means of electrical control desk and interlocking by means of electrical control and interlock
Complete interlocking with relay of the control and interlocking by means of electrical control and interlocking by means of electrical control and interlocking by means of electrical control desk and interlocking by means of electrical control and interlock
Complete interlocking with relay of the complete relay interlocking with relay of the control and interlocking by the complete relay interlocking with relay of the control and interlocking by the control and interloc
Complete interlocking with relay or the control actives with relay or the complete relay interlocking devices without signal-the control dependence or the control dependence or t
Complete interlocking with relay or tender of the positioning devices with relay of tender of the position of
Complete interlocking with relay or tender of the positioning devices with relay of tender of the position of
Complete interlocking with relay or decrease with relay interlocking with relay or decrease with the signal-unround dependence with the signal-unround dependence or decrease without signal-unround dependence or decrease without signal-unround dependence or decrease without signal-unround decrease with the signal-unround decre
Complete interlocking with relay or decrements devices Local decrements with relay or large and the large of signal-unround dependence Local decrees with relay interlocking large and l
Complete interlocking with relay or electronic devices Local devices Local devices Local devices Local devices Local devices with the state of
Complete interlocking with relay or complete relay interlocking a large of the complete relay interlocking control of the control of the complete relay interlocking control of the complete relay interlocking control of the complete relay interlocking control of the control of th
Complete interlocking with relay or
aui(
RAILWAY LINES Mala Krsna - Bor - Rasputnica 2 - (Vražogmac) Crecui kst - Zalečar - Prahovo pristanište (Rgotina) - Rasputnica 2 - (Vražogmac) Crecui kst - Zalečar - Prahovo pristanište (Rgotina) - Rasputnica 1 - (Tranvac) Dollevae - Kastrat - Kossov Polje Kuršumlija - Kastrat - Kossov Polje Rosovo Polje - Matolnija - Peč Kosovo Polje - Matolnija - Peč Kosovo Polje - Matolnija - Peč Rosovo Polje - Rasputnica 1 - Kasputnica 3 - (Kač) Rosovo Polje - Rasputnica 1 - Rasputnica 3 - (Kač) Rosovo Polje - Rasputnica 1 - Rasputnica 3 - (Kač) Rosovo Polje - Rasputnica 1 - Rasputnica 3 - (Kač) Runki salevciv - Rasputnica 1 - Rasputnica 3 - (Kač) Runki salevciv - Rasputnica 1 - Rasputnica 3 - (Kač) Runki salevciv - Rasputnica 2 - Atomik Gnad Backa - Ratavutno Donja Borina - Zvornik Gnad Raki - Starvutnov - Rasputnica Borina - Zvornik Gnad Backa - Ratavutnica A - Rasputnica B - (Jascnovo) Poparev - Rasputnica A - Rasputnica B - (Jascnovo) Poparev - Rasputnica A - Rasputnica B - (Jascnovo) Poparev - Rasputnica Spot Požarevački - Kostolac Matolija - Prizen Rocka - Votas - Vasavište Alibumar - Scleniš Metolija - Prizen Coka - Novi Kurševa - Kari Rokar - Matonska ostice Rokar - Resputnica Storice Rokinda - Metonska ostice Rokinda - Rokanda -
Mala Krsna - Bo Areni ksta - Zaji Rgottina) - Rasp Dollevae - Kasta Cursamilja - Kas Barlvoo - Rasp Barlvoo - Rasp Gosovo Polje - Is Gosovo - Raspii Gosovo - Is Gosovo
RAILA 22 Mala Krsna - Bor - Rasputnica 2 215 Creeni krst - Zaięčar - Pralbovo p 217 (Regotina) - Rasputnica 2 - Rasput 220 (Creeni krst - Zaięćar - Pralbovo p 2218 Dollevae - Kastrat - Kosovo Polity 220 (Rainko) - Kastrat - Kurst 220 (Barlwo) - Rasputnica 1 - Kurst 220 (Barlwo) - Rasputnica 1 - Kurst 220 (Barlwo) - Rasputnica 1 - Kurst 221 (Rosovo Polic a fobrita - Rasputnia 301 Suboica - Suboica fobrita - Rasputnia 302 Suboica - Suboica fobrita - Rasputnia 303 (Rainki sančevi) - Rasputnica 1 - Rasputnia 304 (Rainki sančevi) - Rasputnica 1 - Rasputnia 305 (Podbara) - Rasputnica 1 - Rasputnia 306 (Rainki sančevi) - Rasputnica 1 - Rasputnia 307 (Podbara) - Rasputnica 1 - Rasputnia 308 (Rainki sančevi) - Rasputnica 1 - Rasputnia 309 (Rainki sančevi) - Rasputnica 1 - Rasputnia 310 (Rainki sančevi) - Rasputnica 2 - Colpup 311 (Backia Palanka - Cajdobra 312 (Barkara Palanka - Cajdobra 313 (Barkara Palanka - Cajdobra 314 (Sachara - Sale - Sale - Sale - Rasputnica 3 - Colpup 315 (Maria - Metamolsko siriceni ko 400 Albumar - Saleus 401 (Maria - Metamolsko siriceni ko 402 (Vršac - Padinska Skela 323 (Maria - Metamolsko siriceni ko 404 (Madmirovae - Rovin 405 (Gola - Novi Knačvac - 406 (Kikinda - Metamolsko siriceni ko 407 (Rainda - Metamolsko siriceni ko 408 (Kikinda - Metamolsko siriceni ko 409 (Kikinda - Metamolsko siriceni ko 400 (Kikinda - Metamolsko siriceni ko 407 (Sonbo) - Rasputnica 3 strilici - Backia 408 (Sonbo) - Rasputnica 3 strilici - Backia 409 (Sonbo) - Rasputnica 3 strilici - Backia 408 (Sonbo) - Rasputnica 3 stril

95



											INTED	LOCKI	NC FAC	חדו ודי	e e							—	
											INTER	LOCKI	0.0000000000000000000000000000000000000	crossing	****	levices							
			Interstal	tion deper device	ndence		Autor	matic t	oloc		Auton	natic pos				al positi		flevel	Traf	fic remote	contro	l devi	ces
										#	half-ba	arrier or	only (colour	elec	trical	mech	nanical			ters	ions	т
		RAILWAY LINE	line	k line	between	: line	k line	ıts		uipped w		rier udinal	light s			ices	2027/2020	rices	. line	k line	ntrol cen	ntrol stat	controlle
	Railway Line No		ength of single track line	ength of double track line	Number of distances between stations	ength of signle track line	Length of double track line	Number of block points	Number of signals	Number of signals equipped with auto-stop devices	in station	on track	in station	on track	n station	on track	in station	on track	cngth of signle track line	Length of double track line	Number of remote control centers	Number of remote control stations	Number of remotely controlled stations
% N	Raily		ے kr	Н	kom	П	m m	Z	Z	Ζā	Ë	10	pcs	10	.5	o	.5	10		m m	Z	z pcs	
1	la	2	3	4	5	6	7	8	9	10	-11	12	13	14	15	16	17	18	19	20	21	22	23
1	101	Beograd - Stara Pazova - Šid - državna granica - (Tovarnik)						61	120	120	14	12								97+918	1	5	6
	102	Beograd - Mladenovac - Lapovo - Niš - Preševo -	6+000		1		14+150	195	443	289	37	53	ī	1	2		8	4			2	38	15
2	2000	državna granica - (Tabanovce) (Beograd) - Rakovica - Jajinci - Mala Krsna - Velika			-	1000					-	200		-	_			-					
3	103	Plana				93+143		41	81	81	11	3					1				1	12	4
4	104	(Beograd) - Stara Pazova - Novi Sad - Subotica - državna granica - (Kelebia)	15+020		4	133+722		61	121	121	15	8			2	1	1	2					
5	105	Niš - Dimitrovgrad - državna granica - (Dragoman				16+100		6	11		5	7			3	4	7	4					
6	106	Beograd Centar - Pančevo glavna stanica - Vršac - državna granica - (Stamora Moravita)	82+200	19+070	14		19+600	10	26	26	4	2					8	1					
	107	(Beograd) - Resnik - Požega - Vrbnica - državna	287+013		33						3	9	ĩ	15					287+013		1	26	9
7	5 5 5	granica - (Bijelo Polje) Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral	20, 1013		20					-		- CO							207.1913				(20)
8	108	Janković - državna granica - (Volkovo			14101						3		2		1		7	4				Ш	
9	109 110	Subotica - Bogojevo - državna granica - (Erdut Beograd Centar - Novi Beograd	69+820		11		2+887	2	4	4	1	5	1				11	10				\dashv	
11	111	Beograd Centar - Rasputnica G - (Rakovica)					4+416	4	8	8													7.11
12	112	Beograd Ranžima "A" - Ostružnica - Batajnica Beograd Ranžima "B" - Ostružnica		-	-	25+658 5+902		14	26	26 2	1	1									1	\dashv	2
	114	Beograd Ranžirna "A" - Rasputnica "B" - Rasputnica	71 - 2			10+419		4	8	8	1						1					1	1
14	115	"K/K1" - Resnik Ostružnica - Rasputnica "B" - (Rasputnica "K/K1")		_	-	2+121	-	1	2	2	1			_					_		-		
	116	Beograd Ranžirna "B" - Rasputnica "R" - Rasputnica				4+538		2	2	2													
16 17	117	"A" - (Resnik) (Beograd Ranžirna "B") - Rasputnica "R" - Rakovica				1+149		-		2				_							_	\dashv	
18	118	Beograd Ranžirna "A" - Rasputnica "Τ" - Rakovica				0+709																	
19	119	Beograd Ranžima "B" - Rasputnica "T" - (Rakovica) vezni kolosek na području Rasputnice "K/K1":				8+379		3	5	5												\dashv	_
	120	(Rasputnica "B") - skretnica "K" - skretnica "K1" -				0+463																	
20	121	(Jajinci) Topčider - Rasputnica Savski most - (Novi Beograd				3+578		1	1													\dashv	_
	122	Topčider - Beograd spoljna - Beograd Dunav -				6+257	4+519	1	1							1	0	0				\neg	_
22	122	Rasputnica Pančevački mos	71	12 8		07237	47319									,	U	U				\dashv	
23	123	obilazni kolosek stanice Beograd Spoljna: (Topčider) - Blok 1 "Obala" - Blok 2 "Prelaz" - (Beograd donji grad)				1+757											1						
24	124	(Rasputnica Pančevački most) - Rasputnica Karađorđev park - Rasputnica Dedinje - (Rasputnica G)					1+591																
25		Indija - Golubinci	4+020		1	4+020		2	4	4													
26	126	Novi Sad - Novi Sad Ranžima - Rasputnica Sajlovo	3+749		2																	\dashv	_
27	127	obilazni kolosek stanice Mala Krsna: (Kolari) - odvojna skretnica 1 - odvojna skretnica 28 - (Osipaonica)				2+387					1												
28	128	Rasputnica Lapovo Varoš - Lapovo ranžirna - Lapovo					3+788																
29		Trupale - Niš ranžirna - Međurovo				1+220	l .	2	3	1												\Box	
30		Crveni krst - Niš ranžirna Niš - Rasputnica most - (Niš ranžirna)				17+100 4+990	1	4	7		1	1										\dashv	
32	132	Spojni kolosek stanice Niš: (Crveni krst) - odvojna				0+500						2										П	
33		skretnica 2 - odvojna skretnica 4 - (Čele kula) Subotica - Horgoš - državna granica - (Roszke)	24+351		5						3						2	2					
34	202	Pančevo Glavna stanica - Zrenjanin - Kikinda - državna	131+318		14						4	10			1		11	4				\sqcap	
35		granica - (Jimbolia) Banatsko Miloševo - Senta - Subotica	80+264		14							1					2	2					
36 37	204	Pančevo Varoš - Rasputnica 2a - (Jabuka)	1+600		1							- 1			1		7	1			\Box	\exists	
	7 7	Novi Sad - Odžaci - Bogojevc (Novi Sad) - Rasputnica Sajlovo - Rimski šančevi -	89+457		10							1			1		7	4				\dashv	
38	206	Orlovat stajalište	65+405	<u> </u>	11							1					4	3				\dashv	
39 40	207	Novi Sad Ranžirna - Sajlovo Rasputnica Orlovat - Rasputnica 1a - (Lukićevo)	2+502 0+630		1																	\dashv	
	209	Ruma - Šabac - Rasputnica Donja Borina - državna				101+951						3			4	3	3	6					
41		granica - (Zvornik Novi) (Platičevo) - Rasputnica 1 - Rasputnica 3 - (Štitar)										4447										\dashv	
43		Stalać - Kraljevo - Požega				135+733						2	1		2		4	5					
44	212	spojni kolosek stanice Kraljevo: (Mataruška Banja) - odvojna skretnica broj 72 - odvojna skretnica broj 73 - (Adrani)																					
45	213	spojni kolosek stanice Požega: (Uzići) - odvojna skretnica broj 53 - odvojna skretnica broj 54 - (Dragačevo)																					
46		Smederevo - Mala Krsna				11+742					1		1		1		2	2				╛	
47		Mala Krsna - Bor - Rasputnica 2 - (Vražogrnac) Crveni krst - Zaječar - Prahovo pristanište										1			1		7	1				\dashv	
49	217	(Rgotina) - Rasputnica 3 - Rasputnica 1 - (Trnavac)										1					7	1				╛	
		Doljevac - Kastrat - Kosovo Polje Kuršumlija - Kastrat													1		-				\vdash	\dashv	
- 51	417	рхизинија - Казиа							1			1				_			1			-	



		I									INTER	LOCKI	NG FA	CILITIE	S							_	\neg
											T			crossing		levices							
			Intersta	tion depe	ndence		Auto	matic b	loc		Auton		itioning		-	al positi		level	Traf	fic remote	contro	l devi	ices
												cros	sings			cross	sings						
										ч	half he	arrier or									LS.	ns	
					5					Number of signals equipped with auto-stop devices		rier		colour	elect			anical			Number of remote control centers	Number of remote control stations	led
		RAILWAY LINE	ne ne	ine	wee	nc	inc			ped		udinal	light s	signals	dev	ices	dev	ices	ne	inc	010	ol st	Itrol
			Length of single track line	Length of double track line	Number of distances between stations	Length of signle track line	Length of double track line	Number of block points		quij			_					_	Length of signle track line	Length of double track line	onti	ontr	Number of remotely controlled stations
			tra	e tra	nces	ITak	c tra	od y	str	ıls e									trac	e tra	te c	te o	tely
	No		ngle	Iduo	lista	gnle	Iqno	locl	Number of signals	Number of signal auto-stop devices									gnle	Iduc	emo	cmo	emo
	ne N		of Si	of de	o Jo	of si	op Jo	of b	s Jo	of s	_		_		,		-		of si	of de	ofr	of r	of r
	E		ti,	th o	ber	o th	th o	ber	ber	ber- stop	itior	ack	itior	ack	ıtior	ack	ıtior	ack	îth o	o qu	ber	ber	nber
	Railway Line		eng	eng	Number	cng	cng	I I	III.	uto-	in station	on track	in station	on track	ın station	on track	n station	on track	eng	cng	[]	Z m	Number
°N	Rail		kı		kom	kı				4 6		0	pcs	0		0	- =			m	2	pcs	2 8
1	1a	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
52	220	(Barlovo) - Rasputnica 1 - Kuršumlija																					
53		Kosovo Polje - Metohija - Peć																				\vdash	_
54		Kosovo Polje Teretna - Rasputnica 1 - (Drenica) Subotica - Subotica fabrika	4+100		1						_		_	1				4			Н	\vdash	-
56	302	Subotica - Subotica bolnica	2+745		1									1			_	+			Н	\vdash	-
57		Kanjiža - Horgoš	2.745		_							0										П	
58	304	Novi Sad - Novi Sad ložionica	2+870		1							4			2			1					
59	305	(Podbara) - Rasputnica 3 - Rasputnica 2 - (Kać)	3+659		2																Ш	Ш	-
60	306	(Rimski šančevi) - Rasputnica 1 - Rasputnica 3 -	0+910		1																		
61	307	(Podbara) Rimski šančevi - Bečej									-				1		9				Н	\vdash	-
62		Vrbas - Sombor						H			1	1			2		1	1			Н	\Box	-1
63		Petrovaradin - Beočir	17+035		3												2	2					
64		Apatin Fabrika - Strilić - Sombor	38+304		4	j .						3					1	2					
65		Bač - Karavukovo	13+420		2										1		1					\Box	
66		Bačka Palanka - Gajdobra (Brasina) - Rasputnica Donja Borina - Zvornik Grac	14+422		2	6+818		\vdash			-		-		_		2	4			Н	\vdash	-
07				\vdash				\vdash			_		-			_					Н	\vdash	-
68	314	Šid - Sremska Rača Nova - državna granica - (Bijeljina)				25+612												2					
69			12+916		4												2						
70		Sečanj - Jaša Tomić	10+363		1																	Ш	
71		Zrenjanin Fabrika - Vršac - Bela Crkva Pančevo Varoš - Pančevo Vojlovica	65+3348 2+907		2	8		\vdash				1			1	3	4					\vdash	-
73		(Uljma) - Rasputnica A - Rasputnica B - (Jasenovo)	0+488		1							1			1	3					Н	\vdash	-
-		spojni kolosek stanice Senta: (Čoka) - odvojna skretnica																			П	\Box	\Box
74	320	22 - odvojna skretnica 23 - (Orom)										8											
75	321	(Požarevac) - Rasputnica Sopot Požarevački - Kostolac				9+900																	
76		Markovac - Resavica				53+250						1		1	1		3	4					
77		Ovča - Padinska Skela	18+580		1	18+580																	
78 79		Metohija - Prizren.																				\vdash	-1
80		Bečej - Vrbas Vršac - Vršac Vašarište		_	_			\vdash	_		-		_		_		1				Н	\vdash	-
81		Alibunar - Seleuš	8+386		1																Н		
82		Vladimirovac - Kovin	43+030		1							0						2					
83		Čoka - Novi Kneževac	12+300		2												1						
84	406	Kikinda - Metanolsko sirćetni kompleks (km 6+413)	7+255		1			_					_								Ш	Ш	
85 86	407	Bogojevo - Dunavska obala (Sombor) - Rasputnica Strilić - Bački breg	2+733 28+090		1			\vdash													Н	$\vdash\vdash$	-
87	409	Sombor - Ridica	32+741		1							× ·									Н	\vdash	-1
88	410					3+830																	
89		Paraćin - Stari Popovac									1						1						
90	412	Surčin - Jakovo Bečmer				4+400																Ш	\blacksquare
91	413	(Beograd spoljna) - km 2+290 odvojna skretnica - Fabrika šećera				0+600																	
92	501	Šarganska osmica		\vdash				\vdash			\vdash										Н	\vdash	\dashv
	001	Total			161			416	876	699	107	127	7	18	28	12	115	76			6	82	37



Appendix 3.7 Overview of telecommunication devices equipping level

		-		Telephone	oue	Telephone			- 1	Telegraph					Telephone			Telegraph		L
Selection of the proper of the				Traff	desks		Trackside tele	phones												
			PPA telephones					At automatic block (APB)	37.5		Sound signalling devices	maleys "gate yet gate?"	are os such assembly	Cross-par	refleair rotom circord dialler	EZK	Ејесдонје	"Slep by step" system	Dispatching exchanges	
	Т		bcs	┝	+	H		bcs	┝	H	╁	type	t	H	H	\vdash	H		-	-
		Н	7	Н	Н	Н	Н	14	Н	Н	Н	16		Н	Н	Н	Н	Н	Н	Н
		Н	-	Н	Н		Н	11	Н	Н	18		2	-	0	3		Н	Н	15
1			2 0		+			170			4 ∞		4 -	0 0	0	10		+		-
1 1 1 1 1 1 1 1 1 1	П		2	\vdash			H	55		H	6	eb5	6	500	0	2		\vdash	1 2	⊢
Note		+	=	0 0	4	7	+	9	+	Ŧ	6	car	0	-	0	-			+	0
1			2	0 1	7		H	12	H		5		0	0	0	0			0	9
		Н	0	0 2	35	Н	Н	70	70 1.	9	89	ISKRA	2	0		0 0	Ц	Н	Н	37
		+	91 0	0 0	2 0	× -	+	0	2 0	+	12		- 0	- 0	0 0	0 0	63	+	+	- 0
		0 0	0	0	-	- 6	+	-	+	+	-		0	-	0		2		0 0	
		-	0	0	. 0	9	0 0	4	H	-	0		0	0	0	0			0	-
			-	0 0	2		5 2	14	0 1	0	0		0	0	0	0			0 0	0
	Т	0	0	0 0	0	+	0	2	0 0	-	0		0	0 0	0	0 0			0 0	0
		- 0	0 0	0 0	0 0	- 6	0 -	- "	0 0	00	0 0		0 0	0 0	0 0	0 0			0 0	0 0
1		+	0	0 4	4	4	3 0	2	0	-	0		0	-	0	0			0 0	0
1	П	Н	0	0 0	0	0		-	0	0	0		0	0	0	0			0 0	0
	П	+	0	0 0	0	0	+	0	0	0 0	0		0	0	0	0			0 0	0
1		+	0 0	0 0	0 %	- 4	-	- 0	0 0	0 -	0		0 0		0	0 0			0 0	0
1	П	H	-	0 0	-	3		-	0	0	0		0	0	0	0			0 0	0
1		H	2	2 0	0	-		0	0 2	0	0		0	0	0	0			0 0	0
1	П	+	0 0	0 0	0	0		0	0 0	0	0		0	0 0	0	0 0			0 0	0 0
1	Т	+	0	0	0	2 2	H	2	0	0	0		0	0	0	0			0	0
No.	П	Н	0	0 0	0	2	H	0	0	H	-		0	0	0	0			0 0	0
No.	П	+	0	0 0	0	0	+	0	0	+	0		0	0	0	0			0 0	0 0
1	Т	+	0	0	4 4	5	+	0	5	0	0		0	-	0	0			0	0 4
1		Н	0	0 0	0	-		0	0		0		0	0	0	0			0 0	0
1	П	+	0	0 0	0		+	0	0	+	0		0	0	0	0			0 0	0
1		+	0 0	0 0	0 0			0 0	0 0		2		0 0	0	0 0	0 0			0 0	0 0
C	П	216 4	0	0 0	-	0	0 1	0	0	9	13	fb5	_	1	0	0			1 0	0
	Т	+	0	0 0	0	+	0	0	0	0	0		0	0	0	0			0 0	0 0
	_	+	15	0 0	0	+	0 -	0		0 0	0 0			-	0 0					0
1		2 0	0	0	0	0	0 (0	0	0	0		0	0	0	0			0	0
		10 0	0	0 0	0	0	0 0	0	0	0	0		0	0	0	0			0 0	0
		\dashv	0	0 0	0	+	\dashv	0	0	0	0		0	0	0	0			0 0	0
Note that the control of the contr		+	0	0 0	0	+	0	0	0	0	0		0	0	0	0			0 0	0
2	Т	+	- 0	0 0	× (91	2 4	0	6	0	0		- 0	- 0	0	0			0 0	90 0
3.00	Т	0 9	000	0 0	7 01	4 "	+	0 0	0 0	0 -	7		0 -	0	0 0	0 0			0 0	0 0
		200 2	91	0 0	-	2	ł	0	0	0	0		-	0	0	0			0 0	0
	0	3 0	0	0 0	0			0	0		0		0	0	0	0			0 0	0
	0	0 0	0	0 0	0			0	0		0		0	0	0	0			0 0	0
	0	0	0	0 0	0	-	+	0	0	0 0	0		0	0	0	0			0 0	0 0
	0	0	0	0 0	0		+	0	0	0	0	_	0	0	0	0			0	, 0
	0	-	0	0 0	0			0	0		0		0	0	0	0			0 0	0
	0	\vdash	0	0 0	0	-	0 0	0	0	0	-		0	0	0	0		-	H	0



Γ				Station dispatching devices	bcs	32	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	181
	ľ			Dispatching exchanges	bcs	31	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	10
	-5	no.			bcs	30	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
	Tologue	reiegraph		"Step by step" system	type	29		T	1	1		T	1																						
	ŀ	1					_	_			_								_		_	_				_		_			_	_			2
				Ејеспоніс	bcs	28	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	un.
					type	27																						6 3				0. 1			
UNITS	ı				sod	56	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	17
EXCHANGE UNITS	l			ESK	type	25			1			Ī																							
EXC	I.				bcs	24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2
	Tolonhono	eiepnone		EMD with electric motor dialler	be	23		Ì	1	1		1	1															3 7					-		
	-				t	- 2		_	4	4	_	4	4										_	_	_									Ц	
				Cross-bar	bcs	22	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	12
					type	21												- 13																	
					bcs	20	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	17
				"Step by step" system	ю	•		+	+	+	1	+	+											-	-									+	
L					type	Н		+	1	_	1	4	1			_									4	_									
L	Т	_		Sound signalling devices		Н	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	156
	Incomple	lelegraph		Telefaxes	bcs	17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	п
	F.	=		Teleprinters	bcs	16	0	0	٥	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	88
				Others	bcs	15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	126
			ohones	At automatic block (APB)	bcs	14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	397
			Trackside telephones	At level crossings (PP)	bcs	13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	284
			Track	Are exit signals	bcs	12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	351
DEVICES				At entry signals	bcs	11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	415
TERMINAL DEVICES		İ	remote control desks	Ar railway stations	bcs	10	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	201
FINAL TER		Telephone	Traff.remote desks	At operational dispatching centers	bcs	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	24
H	F	le le	F	PA telephones	sod	8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	∞
				PPA telephones		7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	96
				Societary sets		9	0	_	+	+	+	+	+	0		0	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	182
				Automatic telephone devices		5 (0		+	+	+	+	+	0	+	0	0		0	0	0	4	0	0	0	0	0	0	0	0	0	0	0	0	1000
								-	+	+	+	+	+		+				Н			-			+									-	2 4598
				CB telephone devices	-	4	0	+	+	+	+	+	+	0	+	0	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 262
L				LB telephone devices	bcs	3	0	0	٥	0	0	0	٥	0	0	0	0	3	0	0	0	6	0	0	0	0	0	0	0	0	0	0	0	0	880
				RMILWAY LINE:	Rain	2	306 (Rim. Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)		309 Petrovaradin-Beočin					314 Sid-Sremska Rača Nova-State Border.		316 Sečanj-Jaša Tomić	317 (Zrenjanin)-Zrenjanin fabr.Vršac-Bela Crkva	318 Pančevo Varoš-Pančevo Vojlovica		320 Senta-Odvojna skr. 22 Senta	321 (Požarevac)-Rasput Sopot PožKostolac	322 Markovac-Resavica	323 Ovča-Padinska Skela	403 Alibunar-Seleuš	404 Vladimirovac-Kovin	405 Čoka-Novi Kneževac	406 Kikinda-MKS (ind.kolosek)	407 Bogojevo-Dunavska obala	408 Sombor-Bački Breg	409 Sombor-Ridica	410 (Višnjićevo)-Rasput.Rača-Sremska Rača	411 Paračin-Stari Popovac	412 Surčin-Jakovo-Bečmen-(Boljevci)	413 (Bgd spoljna)-km 2+290-Fabrika šećera	Total:
	_				oN	1	45	-	-	-	-	-	_	52	_	71	81	67	\vdash	48	70	63	-	$\overline{}$	80	59	19	88	72	73	62	89	77	22	



March Marc	_											1	THE STATE	LECCIVEY	UNICAL	OTHER TELECOMMUNICATION DEVICES	CES									
Separation of the control of the con	_		Devices	for recon	ding of tra	insmitted	Ď	vices disp	laying accu	rrate time		-	A devices			Inte	rphones		Po	wer supply	devices	ы	*assenger v	isual infor	mation dis	plays
	oV ənii yawlıs	AY LINE	8 channels	12 channels	16 channels	5+ channels	Number of stations	Clock exchange units	Master clocks						snoitete to teations		noisellastai roobni ro4	For outdoor installation	Acummulator batteries	Ясілбегь	Сопчейега	Motor electric generator units	snoitsts to 15dmu/l		sárjdsip uoneuuojuj	гигошивной ктоска
		2	pcs 33	pcs 34	pcs 35	36	pcs 37	pcs 38	36				+		pc:	+	pcs 48	pcs 49	pcs 50	pcs	pcs 52	pcs 53	pcs 54		Sc. 26	cs S7
11	П		1	1	0	0	3	2	-	Н	Н	Н	Н	Н	0	Н	0	0	16	91	0	0	10	Н	0	0
11	т	o-State Border.	9	2	0	-	9	2	21	78	323	30	-	-	9	4	38	17	72	71	0	-	1	1	4	0
		sna-V.Plana		0 -	0	0 -	20	0 0	3	12	133	1 1	+	+	0 -	0 0	0 -	0 0	110	25	0 0	0 %	0 -	0 0	0 0	00
No. Incompression Marketine Mark	105	ra-state potent.	-	0	0	0	0	0	2	3	20			+	0	0	0	0	7	13	0	0	0	+	0	0
11	106	tate Border.	1	0 0		0 0	34	0 3	34 3					_			3 86	0 -	3 62x12V 222x2V	47	0 0	0 0	0		0 93	0 0
11	108	State Border.	- 0	0	0 0	0	e 0	0 0	6	0 0		+	+	+	0 0	0	0 0	0	28	26	- 0	0 0	0 0	0 0	0 0	0
	110	er.	0	0	0	0	0	0	0 1	0 1	0.00			9 4	0	0	0	0	o 4	n 00	0	0 0	0 0	0 0	0 0	00
1111	Ξ	(akovica)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
11	113	-Batajnica	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0				0 0	0 0	0 0	0 0	0	0 3	0	0 0	0 0	0 0	0 0	0 0	0 0
11 11 11 11 11 11 11 1	114	Rasp."K"-Resnik	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0		0 0	0 0	0 0	0 0	0 0	- 0	- 0	0 0	0 0	0 0	0 0	0 0	00
11 11 11 11 11 11 11 1	116	Asp."A"	0	0	0	2	0	0	-	0				1	0	0	0	0		3 6	0	0	0	0	0	0
11 11 12 12 12 13 13 14 14 14 14 14 14	117	-Rakovica sn "T"-Rakovica	0	0	0	0	0 0	0	0 0	0	0	0			0 0	0 0	0	0	0	0	0 0	0 0	0 0	0 0	0 0	0 0
11 11 11 12 12 12 12 12	119	"T"-(Rakovica)	0	0	0	0	0	0	0	0	0	9			0	0	0	0	0	0	0	0	0	0	0	
12 1 1 1 1 1 1 1 1 1	120	-Ras.K1-Jajinci	0 0	0	0	0 0	e 0	0	e 0	0 0	01	0 0	3	2 0	0 0	0 0	0	0	- 0	2	0	0 0	0 0	0 0	0 0	0 0
131 (1749c)-High Chanel-Hidde Special High Special Live Special High Special Live Special High Special Live Special High S	122	IRas.Pan.Most	0	0	0	0	0	0	0	0	3 0	0	2	1	0	0	0	0	0	0	0	0	0	0	0	00
No. No. No. No. No. No. No. No. No. No.	123	ljna-Blok 2 prel	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12 12 12 12 12 12 12 12	124	Dedinje-(Rakov.)	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0
131 Although Malker	126	Rasp.	0	0	0	0	0	0	0	-				0	0	0	0	0	-	-	0	0	0	0	0	0
150 Create New New New New New New New New New Ne	127	a-Lanovo	0 0	0 0	0 0	0 0	0 0	0 0	0 2	0 8	0 %	0 -	0 0	0 -	0 0	0 0	0 0	0 0	0 %	0 %	0 0	0 0	0 0	0 0	0 0	00
131 Sincher Net-Ale Ranimania Medical Ranimani	129	0.0	0	0	0	0	0	0	-	0	26	1 6		- 1	0	0	0	0	2		0	0	0	0	0	0
Very Series Paris, Pa		žirna)	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	00
District Control	132	ele Kula)	0 0	0 0	0 0	0 0	0 0	0 0	0 -	0 0	0 %	0 -	0 "	0 -	0 0	0 0	0 0	0 0	0	0	00	0 0	0 0	0 0	0 0	0 0
Name National Part National	202	sinda-State Border.	1	0	0	0	0	0	0	0	0	2 2	7	2	0	0	0	0	2	9	0	0	0	0	0	0
200 NiceAssignive Absopatitical-Boggière Virabilities Assignive Absopatitical III «L'Attakérova Paje" 0	203	otica "-(Jahnka)	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0		0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0
200 Classed-Sellay-Exalization (Saperal Activate) 0	205	sojevo	0	0	0	0	0	0	0	0	0	H	H	0	0	0	0	0	0	0	0	0	0	0	0	0
218 Othors-Regulations** Table-Cascolutions** Tab	206	Lstaj(Tomas) Itnica	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0					0 0	0 0	0 0	0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	00
211 Statick-Kribjtev-Pologgi 1 1 1 1 1 1 1 1 1 1 2 2 1 1 1 2 1 2 2 1 1 1 2 1 2 2 1 1 6 1 0	208	ćevo) na-State Border.	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0			0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	00
2.13 Mixturest Mixture	211		0	0	0	0	2	0	2		41 6	3	2(0	0 0	0	0	17	20	0	0	0 0	0	0	0
210 Mischaer-Enderworp Disjoincer-Enderworp Disjo	215	Vražogrnac)	0	0	0	0	v 00	0	2	7	10	3 4	22	3	0	0	0	0	18	10	0 0	00	00	0 0	0 0	
2.19 (Kalkmilphide) Experimentary Control Contr	216	te Dotio	0	0	0	0	- 0	0	1	0	0	1 2	20		0	0 0	0	0	5	- 0	0	0	0	0	0	0
2.20 [datelock-bedgeparties] ""-Kusbunitja 0	219	- Control	0	0	0	0	0	0	0	0	0 0			0	0	0	0	0	0	0	0	0	0 0	0	0	0
301 Subtotica-Subtotical Hanksia 302 Subtotica-Subtotical Hanksia 303 Subtotica-Subtotical Hanksia 304 Subtotica-Subtotical Hanksia 305 Subtotica-Subtotical Hanksia 307 Subtotica-Subtotical Hanksia 308 Subtotica-Subtotical Hanksia 308 Subtotica-Subtotical Hanksia 308 Subtotica-Subtotical Hanksia 308 Subtotica-Subtotical Hanksia 309 Petrovandira-Beockii 309 Petrovandira-Beockii 309 Petrovandira-Beockii 309 Subtotica-Subtotical Hanksia 308 Subtotica-Subtotical Hanksia 309 Petrovandira-Beockii 309 Subtotica-Subtotical Hanksia 309 Petrovandira-Beockii 309 Petrovandira-Beockii 309 Subtotica-Subtotical Hanksia 309 Subtotical Hanksia 309 Subtotical Hanksia 309 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtotical Hanksia 300 Subtot	220	umlija	0	0	0	0	0	0	0	0	0			0	0	0	0	0	0	0	0	0	0	0	0	0
3.31 Simple-decorporation and control of the contro	301		0 0	0 0	0	0	0	0	0 0	0 0	0	0 0	0	0 0	0 0	0	0	0	0	0	0	0 0	0 0	0 0	0 0	0 0
349 Movis Sad-Novis Kad Poklonica A companies	303		0	0	0	0	0	0	0 0	0	0 0	0 0	2 0	0	0	0	0	0	0	0	0	0	0	0 0	0 0	
305 (Ruikamekselari 2-Naki) 306 (Ruikamekselari 2-Naki) 307 (Ruikamekselari 2-Naki) 308 (Nakia-Samekari 3-Rasput 3-Naki) 308 (Nakia-Samekari 3-Rasput 3-Nakia) 309 (Nakia-Samekari 3-Rasput 3-Nakia) 309 (Ruikamekselari 3-Rasput 3-Nakia) 300 (Ruikamekselari 3-Rasput 3-Nakia) 300 (Ruikamekselari 3-Nakia) 301 (Ruikamekselari 3-Rasput 3-Nakia) 302 (Ruikamekselari 3-Rasput 3-Nakia) 303 (Ruikamekselari 3-Rasput 3-Nakia) 303 (Ruikamekselari 3-Rasput 3-Nakia) 304 (Ruikamekselari 3-Rasput 3-Nakia) 305 (Ruikamekselari 3-Rasput 3-Nakia) 307 (Ruikamekselari 3-Rasput 3-Nakia) 308 (Ruikamekselari 3-Rasput 3-Nakia) 309 (Ruikamekselari 3-Rasput 3-Nakia) 309 (Ruikamekselari 3-Rasput 3-Nakia) 309 (Ruikamekselari 3-Rasput 3-Nakia) 300 (Ruikamekselari 3-Rasput 3-Rasput 3-Nakia) 300 (Ruikamekselari 3-Rasput	304	17 20 110	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	- 0	1	0	0	0	0	0	0
308 Vrkas-Sombor Vrkas-Sombor 0<	306	z"-(Kac) put. "3"-(Podb.)	0	0	0	0 0	0 0	0	0 0	0 0	00	0 0	0 0	0	0 0	0	0 0	0	0 0	0	0 0	0 0	0 0	0 0	0 0	00
349 Potenzuadua-Beckin 340 Southernachus-Reckin 0 </td <td>308</td> <td></td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>9 0</td> <td></td> <td>0</td>	308		0	0	0	0	0	0	0	0	0	9 0		0	0	0	0	0	0	0	0	0	0	0	0	0
311 Bac-Kantrukovo	309	ombori	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	1	-	+	+	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	00
	311	omoor)	0	0	0	0	0	0	0	0					0	0	0	0	0	0	0	0	0	0	0	0



Particular Par		lays		s	_																							
Polices for resonant Polices for resonant		ion displ	Information kiosks	bcs	57	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Polices for resonant Polices for resonant		informat	system displays	bcs	56	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	97
Polices for resonant Polices for resonant		er visual	Control desks	bcs	55	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4
Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting Povice displaying contracting contra		Passeng	Number of stations	bcs	54	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	14
Packes for resonant and state Packes for resonant and stat			Motor electric generator units	bcs	53	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	+
Packes for resonant and state Packes for resonant and stat		devices	Converters	bcs	52	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
Packes for resonant and state Packes for resonant and stat		ver supply	Rctifiers	bcs	51	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	379
National Particle Particle		Pov	Acummulator batteries	bcs	90	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	328
Prince for recording of transmitted Prince for recording of transm			For outdoor installation	bcs	49	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	18
Packee for recording of transmitted Packee deputying securate time Packee for recording of transmitted S	hones	For indoor installation	bcs	48	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	86	
Pevices for recording of transmitted Pevices for recording of transmitted Pevices displaying accumant time Satterments RAILWAYLINE	DEVICE	Interpl	Ілістрһопс ехсһапде units	bcs	47	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	9
Pevices for recording of transmitted Pevices displaying accurate time statements Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices displaying accurate time Pevices for recording of transmitted Pevices for recording Pevices for recor	ICATION		Number of stations	bcs	94	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	6
Pevices for recording of transmitted Pevices displaying accurate time statements Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices displaying accurate time Pevices for recording of transmitted Pevices for recording Pevices for recor	OMMUN		Microphone console	bcs	45	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	76
Pevices for recording of transmitted Pevices displaying accurate time statements Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices for recording of transmitted Pevices displaying accurate time Pevices displaying accurate time Pevices for recording of transmitted Pevices for recording Pevices for recor	TELEC	ices	2 реакетs	bcs	44	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1886
No. Color ОТНЕ	PA dev	zıəflilqmA	bcs	43	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	183	
Pevices for recording of transmitted Pevices for recording of transmitted Pevices displaying accurate time statements Statement			Number of statons	bcs	42	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	29
Pevices for recording of transmitted statements Pevices for recording of transmitted		9	Auxiliary clocks	bcs	41	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	941
Pevices for recording of transmitted statements Pevices for recording of transmitted		curate tim	Impulse regenerators	bcs	40	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	178
Pevices for recording of transmitted statements Pevices for recording of transmitted		olaying ac	Master clocks	bcs	39	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	101
Pevices for recording of transmitted statements Pevices for recording of transmitted		vices disp	Clock exchange units	bcs	38	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
RAILWAY LINE		De	Number of stations	bcs	37	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	94
RAILWAY LINE		smitted	5+ channels	bcs	36	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7
RAILWAY LINE		ng of transints	16 channels	bcs	35	0	0	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	ю
RAILWAY LINE		or recordi stateme	12 channels	bcs	34	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	vo
2 2 2 3 3 3 3 3 3 4 4		Devices f	8 channels	bcs	33	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	91
				Ks	2			315 Kikinda-Banatsko Arandelovo	316 Sečanj-Jaša Tomić						22 Markovac-Resavica					(06 Kikinda-MKS (ind.kolosek)						112 Surčin-Jakovo-Bečmen-(Boljevci)	(13 (Bgd spoljna)-km 2+290-Fabrika šećera	Total:
2/18/2/12/8/2/8/2/8/2/8/2/8/2/8/2/2/18/2/18/2/18/2/2/8/2/8					1	46 31	52 31	60 31	Н	81 31	67 31	78 31	48 32	70 32	63 32	66 32	53 40	80 40	59 40	61 40	58 40	72 40	73 40	79 41	68 41	77 41	57 41	



Overhead lines 2000 20,000 13,587 10,000 10,00	S S S S S S S S S S		9gue telephone t	80 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 10 10 10 10	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Pcs	Pugate 1	Digital telephone Pes Color Colo	
Mary Market Description of the first operation operation of the first operation of the first operation operation operation operation oper		Pes Special Property Pes Special Property Pes Special Property Pep P	1		ph Pe Per Per Per Per Per Per Per Per Per		Pes 21 21 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	25 25 25 25 25 25 25 25 25 25 25 25 25 2	
km km km 4 5 6 0 0 135,061 0 0 384,168 0 0 0 0 0 0 0 135,857 0 74,00 12,479 0 13,00 0 0 034 0 0 90,34 0 0 20,00 0		1 12 13 14 15 15 15 15 15 15 15	13 14 14 15 14 15 15 15 15		bype 18 18 18 18 18 18 18 18 18 18 18 18 18		21 21 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Pcs 23 23 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	25 25 25 25 25 25 25 25 25 25 25 25 25 2	
0 135,061 0 0 384,168 0 0 384,168 0 0 0 135,857 0 74,00 12,479 0 13,00 0 0 370,388 0 90,34 0			V 300 V 300		18 iskra iskra iskra AUSO UTB ISKI iskra siemens-W7100 iskra iskra iskra		27			
0 0 0 135,061 0 0 0 384,168 0 0 0 0 0 135,857 0 74,00 12,479 0 13,00 0 0 370,388 0 90,34 0		0 0 0 0 0 00 0 0 0 0 0 0 0			iskra iskra AUSO UTB ISKI iskra siemens-WT100 iskra iskra iskra			- 		
0 0 0 384,168 0 0 0 0 0 135,857 0 13,00 12,479 0 13,00 0 0 370,388 0 90,34 0		0 0 0 0 0 0 0 0 0 0 0 0 0			iskra iskra AUSO UTB ISKI iskra siemens-WT100 iskra iskra iskra				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
0 0 0 0 0 135,857 0 74,00 12,479 0 13,00 0 0 90,34 0 0 20,00 0		0 0 0 0 0 0 0 0 0 0 0	- 		AUSO UTB ISKI iskra siemens-WT100 iskra iskra	 		- 	0 0 0 0 0 0 0 0 0 0 0 0 0	
0 0 135,857 0 74,00 12,479 0 13,00 0 0 90,34 0 0 20,00 0		0 0 0 0 0 0 0 0 0 0 0	- 		AUSO UTB ISKI iskra siemens-WT100 iskra iskra iskra iskra iskra	- 			0 0 0 0 0 0 0 0 0 0 0 0 0	
0 74,00 12,479 0 13,00 0 0 0 370,388 0 90,34 0 0 20,00 0		0 0 0 0 0 0 0 0 0 0	 		iskra siemens-WT100 iskra iskra iskra	 		 	0 0 0 0 0 0 0 0 0 0 0 0 0	
0 13,00 0 0 0 370,388 0 90,34 0 0 20,00 0		0 0 0 0 0 0 0 0 0 0			siemens-W7100 siemens-W7100 iskra iskra iskra				0 0 0 0 0 0 0 0 0 0 0 0	
0 0 370,388 0 90,34 0 0 20,00 0					siemens-WT100 iskra iskra iskra iskra	90000000	0 0 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0		
0 90,34 0 0 20,00 0		- 0 0 0 0 0 0 0 0 0				0000000	0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0		
0 20,00				++++++++++					++++++++	
0 0 3648	\parallel									
0 0 0		0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			0000	0 0 0 0 0 0 0 0	0000000		
0 0 0	1	00000	0 0 0 0 0 0 0 0 0			000	0 0 0 0 0 0	000000	++++	
0 0 0 0 11,755	0	0000	0007000	 		0 0			++++	
	+	0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0	,	0000	0000	+++	
0	0 0	0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0	0	0 0 0 0	0 0 0	\vdash	0 0 0
0 0 0		0	7 0 0 0 0			0	0 0 0	0 0	+	0 0
0 0	22		0000	+	0	- 0	00	0		0
0 0		0	000	+	0 0	0 0		, ,	+	, 0
	0 0	0	0	0 0	0 0	0	0	0	0	0 0
0 0		0	0	0 0	0	0	0	0	0	0 0
0 0 0		0	0		0	0	0	0	0	0 0
0 0 0 0 0 0	0 0	0	0	+	0	0 0	0 0	0 0	0 0	0 0
0 0 2000	0 2.700	0	0 0	0 0	0 0	00	00	0 0	0 0	0 0
0 0 0	_	0	0	+	0	0	0	0	0	0 0
0 0 0		0	0	Н		0	0	0	Н	0 0
0 0	0 0	0	0	0 0	0 iskra	- 0	0	0	0	0 0
	31	0	0	0 0	0	00	0	0	0	0 0
0		0	0	0 0	0	0	0	0	0	0 0
0	0 0	0	0	+	0	0	0	0	0	+
2,15 41,2 1,3	4,431	_	0	+	0	0	0	0	0	+
0 0 0 0 0	0 1,660	Kt3-1 0	0	0 0	0	0	0	0	0	0 0
0 0	+	0	0	+	0	0	0	0	0	0 0
0 0	0 14,5	0	0	+	0 0	0 0	0 0	0 0	0	0 0
					0 0			0 0		
	0	0	0	0 0	0	0 0	0 0	0	0	0
0 0 0		Z3F 0	0	+	0	0	0	0	0	0
14,6 0	15 27	-	0	\vdash	0	0	0	0	0	0 0
0 0 0	┝	0	0	\vdash	0	0	0	0	⊢	0 0
0 0 0 0 0	0 0	0	0	0 0	0 iskra	-	0	0	Н	0 0
0 0 0 0 0	0 47,000	Z3F 0	0	0 0		0	0	0	0	0 0
0 0 0 0 0	0 0	0	0	0 0	0	0	0	0	Н	0 0
0 0 0 0 0	0 0	0	0	0 0	0	0	0	0	0	0 0
0 0 0		0	0	0 0	0	0	0	0	0	0 0
0 0		0	0	0 0	0	0	0	0	0	0 0
0 0 0 0 0	0 0	0	0	0 0	0	0	0	0	0	0 0
0 0 0 0 0	0 0	0	0	0 0	0	0	0	0	0	0 0



Column C	Г	П	In-ground amplificrs	bcs	12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	٥
Configure Conf				-	26 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Control March Control Marc				-	Н	H	Н			Н	Н	_	\vdash	Н	Н				H			Н	Н	Н	_	_		Н	Н	Н	0	0	0	0	0
Part Part		I telephone	sylidM 221																																
Column C		Digita	s/iidM 8			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Control lines Control line					21	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Cohe lines Coh	SVICES		s\idM 2	-	20																														
Cohe lines Coh	EL DE			bcs	19	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	31
CABILE SYSTEMS Cable lines MULTI-CHANN		Теведар	type	18																20. 77															
Cable lines Cable lines			In-ground amplifiers	bcs	17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	44
Cable ENVINDAME Cable ENVINDAME			Above ground amplifiers	bcs	91	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	20
CABLE SYSTEMS CABLE INCRETAIN CABLE INCREDITION CABLE SYSTEMS CABLE INCREDITION CABLE SYSTEMS CABLE INCREDITION	e		bcs	15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	8	
CABLE SYSTEMS CABLE INCRETAIN CABLE INCREDITION		nohqa	Over 12 channels	type	14																														
CABLE SYSTEMS CABLE INCRETAIN CABLE INCREDITION		ue tel		_	13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	28
CABLE SYSTEMS Cable lines		Analog	Up to 12 channels																																5.5
CABLE SYSTEMS Cable lines		siannina c ai dn	bcs	Ξ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	4	
CABLE SY STEMS Cable lines CABLE SY STEMS			slameda 6 ot mi	type	10																														
Particle Particle			Госа	km	6	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	427,07
String Petrovaradir-Beocin 13 Returnal-Carpainin fibritist-Strange 14 Returnal-Carpainin fibritist-Strange 15 Returnal-Carpainin fibritist-Strange 15 Returnal-Carpainin fibritist-Strange 16 Returnal-Carpainin fibritist-Strange 17 Returnal-Carpainin fibritist		lines	Fiber optic	km	∞	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	72,950
Note Part	LEMS	Cable	ATZ	km	7	0	0	0	0	0	0	0	0	0	0	0	0	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	507,024
Sombor-Result Reduces Scalar Scal			STKA	km	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1041,453
RAILWAY LINE End	S	100	Overhead cables	km	5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	263,142
Particular Particular Particular Particular		Overhead I	Two wire overhead lines	km	4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	31,650
1			Two-wire overhead lines SiBr	km	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2,000
					2	'5 Podbara-Rasput. "3"-Rasput. "2"-(Kać)	6 (Rim.Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	8 Vrbas-Sombor		0 Sonta-Apatin fabrika-Strilić-(Sombor)		2 Bačka Palanka-Gajdobra			5 Kikinda-Banatsko Arandelovo			8 Pančevo Varoš-Pančevo Vojlovica				2 Markovac-Resavica		3 Alibunar-Seleuš	4 Vladimirovac-Kovin	5 Čoka-Novi Kneževac	6 Kikinda-MKS (ind.kolosek)					1 Paraćin-Stari Popovac	2 Surčin-Jakovo-Bečmen-(Boljevci)	3 (Bgd spoljna)-km 2+290-Fabrika šećera	Total
8 2 3 5 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	L		oV sinc No	Rai		305	306	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	403	404	405	406	407	408	409	410	411	412	413	
	L			οN	-	37	45	33	69	74	54	55	46	52	09	71	81	29	78	48	20	63	99	53	80	59	19	28	72	73	42	89	22	57	



			RADIO DEVICE														
			Locomotive dispatching radio devices			Traffic running networks (2m)				Station radio networks (0,7m)							
	Railway line No	RAILWAY LINE	Exchange units (with railway line splitter)	Length of covered railway line	Trackside stations	Locomotive stations	Number of networks	Radio link	Repeaters	Fixed stations	Mobile stations	Movable stations	Number of networks	Repeaters	Fixed stations	Mobile stations	Movable stations
2 1	Ra	2	pcs 28	km 29	pcs 30	pcs 31	pcs 32	pcs 33	pes 34	pcs 35	pes 36	pes 37	pcs 38	pcs 39	pcs 40	pcs 41	pcs 42
5		BGD-Šid-State Border	1	100	8	0	0	0	0	0	0	0	8	0	8	0	21
		BGD-Mladenovac-Niš-Preševo-State Border. (BGD)-Rakovica-Jajinci-M.Krsna-V.Plana	3	377 100	42 12	8	0	0	0	0	0	0	17	0	19	0	53
		(BGD)-S.Pazova-Inđija-Subotica-State Border. Niš-Dimitrovgrad-State Border.	0	155 0	10	4	0	0	0	0	0	5	7	0	16	0	74 12
6	106	BGD Centar-Pančevo-Vršac-State Border.	0	20	4	0	1	0	1	13	0	4	4	0	4	0	11
		(BGD)-Resnik-Podgorica-Bar Lapovo-Kraljevo-Đ.Janković-State Border.	0	176 0	35 0	0	0	0	0	0 16	0 4	0	0	0	13	0	35 0
		Subotica-Bogojevo-State Border. Beograd Centar-Novi Beograd	0	0 10	0	0 164	0	0	0	0	0	0	0	0	0	0 10	0
8	111	BGD Centar-Rasputnica"G"-(Rakovica)	0	10	2	0	0	0	0	0	0	0	0	0	0	0	0
	113	BGD Ranžirna "A"-Ostružnica-Batajnica BGD Ranžirna."B"-Ostružnica	0	20 0	0	0	0	0	0	0	0	0	0	0	0	0	0
		BGD Ranžirna "A"-Rasp."B"-Rasp."K"-Resnik Ostružnica-Rasp."B"-(Rasp."K"-Resnik)	0	20	3	0	0	0	0	0	0	0	0	0	0	0	0
10	116	BGD Ranžirna "B"-Rasp."R"-Rasp."A"	0	8	4	0	0	0	0	0	0	0	6	1	3	0	19
9		(BGD Ranžirna "B")-Rasp."R"-Rakovica (BGD)-BGD Ranžirna "A"-Rasp."T"-Rakovica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12	119	BGD Ranžirna "B"-Rasputnica "T"-(Rakovica) (BGD Ranz."A"-Ras.B)-Ras.K-Ras.K1-Jajinci	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 12
29	121	Topčider-Rasp.Savski Most-(Novi BGD)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	123	TopčBlok 1Obala-Blok 2 prelRas.Pan.Most (Topč)-Blok 1Obala-BGD Spoljna-Blok 2 prel	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		(Vukov Sp.)-Ras.K.Park-Ras.Dedinje-(Rakov.) Inđija-Golubinci	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
24	126	N.Sad-N.Sad Ranžirna-Sajlovo Rasp.	0	0	0	0	0	0	0	0	0	0	4	0	4	0	11
		Obilazni kolosek Mala Krsna Lapovo Varoš-Lapovo Ranžirna-Lapovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
30	129	Trupale-Niš Ranžirna-Međurovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 19
-		Crveni Krst-Niš Ranžirna Niš-Rasputnica Most-(Niš Ranžirna)	0	0	0	0	0	0	0	0	0	0	5	0	8	0	0
		(Cr.Krst-Skr.2)-Skr.3-Skr.4-(Ćele Kula) Subotica-Horgoš-State Border.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
43	202	Pančevo Glavna-Zrenjanin-Kikinda-State Border.	0	0	0	0	1	0	2	11	0	2	0	0	0	0	0
		Banatsko Miloševo-Senta-Subotica Pančevo Varoš-Rasputnica "2a"-(Jabuka)	0	0	0	0	0	0	0	8	0	6	0	0	0	0	0
		N.Sad-Sajlovo Rasputnica-Bogojevo (N.Sad)-Sajl.RaspR.ŠančOrl.staj(Tomaš)	0	0	0	0	0	0	0	0 18	0	0	0	0	0	0	0
38	207	N.Sad Ranžirna-Sajlovo Rasputnica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Orlovat-Rasputnica "1a"-(Lukićevo) Ruma-Šabac-Rasp.Donja Borina-State Border.	0	0	0	0	1	0	0	8	0	0	2	0	0	0	5
		Stalać-Kraljevo-Požega Smederevo-Mala Krsna	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 12
34	215	M.Krsna-Bor-Rasputnica "2"-(Vražogrnac)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Niš-Zaječar- Prahovo pristanište (Niš)-Doljevac-Kastrat-Kosovo Polje	0	0	0	0	0	0	0	14 0	0	4	0	0	0	0	5
		Kuršumlija-Kastrat (Barlovo)-Rasputnica "1"-Kuršumlija	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
76	301	Subotica-Subotica fabrika	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Subotica-Subotica bolnica Kanjiža-Horgoš	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Novi Sad-Novi Sad ložionica Podbara-Rasput. "3"-Rasput. "2"-(Kać)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
45	306	(Rim.Šančevi)-Rasput "1"-Rasput. "3"-(Podb.)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Vrbas-Sombor Petrovaradin-Beočin	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
74	310	Sonta-Apatin fabrika-Strilić-(Sombor) Bač-Karavukovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
55	312	Bačka Palanka-Gajdobra	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		(Ruma)-Rasp.Donja Borina-Zvornik Grad Šid-Sremska Rača Nova-State Border.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
60	315	Kikinda-Banatsko Aranđelovo	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
81	317	Sečanj-Jaša Tomić (Zrenjanin)-Zrenjanin fabr.Vršac-Bela Crkva	0	0	0	0	0	0	0	0	0	0	0	0	2	0	4
		Pančevo Varoš-Pančevo Vojlovica (Uljma)-RaspA-RaspB-(Jasenovo)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
48	320	Senta-Odvojna skr. 22 Senta	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
63	322	(Požarevac)-Rasput.Sopot PožKostolac Markovac-Resavica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Ovča-Padinska Skela Alibunar-Seleuš	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
80	404	Vladimirovac-Kovin	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Čoka-Novi Kneževac Kikinda-MKS (ind.kolosek)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		Bogojevo-Dunavska obala Sombor-Bački Breg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
73	409	Sombor-Riđica	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		(Višnjićevo)-Rasput.Rača-Sremska Rača Paraćin-Stari Popovac	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
77	412	Surčin-Jakovo-Bečmen-(Boljevci) (Bgd spoljna)-km 2+290-Fabrika šećera	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
31	113	Total:	9	996	122	176	8	2	11	89	4	27	83	6	95	20	298
																	



Appendix 3.8. List of service points where it is possible to perform the transshipment of dangerous goods

The user or the authorized person is liable for safe transshipment and provision of required permits for transshipment issued by the competent authorities (ministry, local self-government, etc.) in case such permits are prescribed by law or by-laws. The Infrastructure Manager is not obliged to control permits and approvals issued by the competent authorities. In case of an accident during transshipment, the user or authorized person undertakes all necessary measures for making handling point functional.

Transshipment of the respective dangerous goods may be carried out on the handling point (handling area, ramp), i.e. the facility placed beside the track referred to in column 3, Table 1 of this Appendix. Transshipment shall be performed in compliance with the applicable regulations of the Republic of Serbia in the field of transport of dangerous goods, health and safety at work, environmental protection, waste treatment, fire protection, etc., complying with the essential safety measures which shall be provided as follows:

Keeping, disposal and storage of dangerous goods in the area of service point, including handling point is prohibited.

The handling point where transshipment is carried out must be enclosed or in any other way separated from passenger transport or from the handling point (loading, unloading, transshipment) with the goods not classified as dangerous (not RID). If a handling point is not enclosed, the client must mount movable fence which shall be removed upon handling (made of plastic orange material used in construction).

The handling point where transshipment is carried out shall have "RID – warning plate on the handling point". In case an IŽS' service point, within which there is the place of handling with dangerous goods, does not have "RID – warning plate on the handling point", the user of the handling point (consignee, consignor or authorized person) is obliged to provide the said plate at their own expense during the entire period of handling. The plate shall be made of sheet, with red colour base, on which the text with white letter is inscribed. The text shall read: RID WARNING – HANDLING WITH DANGEROUS GOODS. Minimum plate size is 600x500 mm. The plate shall look like as indicated:

RID WARNING HANDLING WITH DANGEROUS GOODS

Transshipment of the dangerous goods is carried out during the visible part of day, but it may be performed at night, with electrical lighting whereby the electrical devices that cannot cause fire or explosion may be used. In case an IŽS service point, within which there is the point of handling with dangerous goods does not have capacity for electrical lighting, the user of the handling point shall be obliged to provide necessary lighting at their own expense during the entire period of handling.

In case that said track is under OCL, during transshipment the voltage must be turned off and the track shall be secured in a duly manner.

Road vehicle engine shall be turned off during transshipment.



The disposal of the flammable and material which may cause or intensify fire is prohibited. Furthermore, it is forbidden to dirty the handling area with oil or oil derivatives (out of road freight vehicle).

Fire lighting or work with any open flame, use of tools which sparks and the devices with burner as well as smoking are forbidden during transshipment.

The user of the handling point (consignee, consignor or the authorized person) is obliged to perform cleaning and remove waste, which has been generated during the process of handling with dangerous goods, to the dumpsite, upon the completion of handling activities, in accordance with the Law on Waste Management, Law on Environmental Protection and other legislation and bylaws in the field of environmental protection. In case the user of authorized person does not clean the area after transshipment and does not take waste to the respective dumpsite outside the station, the railway undertaking shall perform cleaning.

The user of the handling point is obliged that, in the process of handling with dangerous goods, comply with the Law on Transport of Dangerous Goods and Law on Protection at Work (to take care on safety and health at work of their employees on the handling point), and particularly to get them acquainted, in a proven manner, with the hazards of stay in railway area (general safety of movement in IŽS's service points, way of conduct in service points, restrictions in movement, hazards from high voltage and other hazards).

Simultaneous transshipment at the same place of handling with dangerous goods of different classes is forbidden.

The service points where transshipment of certain dangerous goods from railway wagons into road vehicle and vice versa is performed are given in the Table of this Appendix.

Upon the request of the interested parties, Infrastructure of Serbian Railways JSC may approve transshipment of other dangerous goods, as well as in service points not given in the Table of this Appendix, in case there are conditions met for handling in the service point, and if the approval of the competent authority is provided for the goods that are being transshipped if it is prescribed by the law (ministries, local self-government units, , i.e. the Ministry of Interior's services).

For more information please contact:

"Infrastructure of Serbian Railways" JSC Traffic Department 6 Nemanjina St., 11000 Belgrade, Serbia Phone/Fax:+381 11 36 18 214 E-mail:sektor.sp@srbrail.rs

The table consists of 7 columns, with the following content:

- column No 1 "ordinal No";
- column No 2 ,, Name of a service point";
- column No 3 "Track", contains ordinal number or name of track in accordance with Station regulations (transport dispatching point or loading point);
- columns 4, 5 and 6 "Dangerous goods", contain NHM code, UN item/number for indication of hazards and class of dangerous goods, whose transshipment may be carried out;
- column No 7 "Notes", contains specific information relating to specific boxes.



Table: List of service points open for transshipment of dangerous goods

1 401	e: List of service points op	en for transsinpine	Dangerous goo			
No	Name of service point	Track	NHM	UN / number for hazards indication	Class	Notes
1	2	3	4	<u>ا بن بن بن بن بن بن بن بن بن بن بن بن بن </u>	6	7
		3	3105 20	2067/50	5.1	,
1.	Adrovac	1	3102 30	1942/50	5.1	
2.	Aleksinac	1	3105 20	2067/50	5.1	
			3102 30	1942/50	5.1	
3.	Bagrdan	6	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
	D VI T 1	1.5.7	3105 20	2067/50	5.1	
4.	Bačka Topola	1, 5, 7	3102 30	1942/50	5.1	
5.	Bor Freight	1	3105 20	2067/50	5.1	
٦.	DOI PICIGIII	1	3102 30	1942/50	5.1	
6.	Valjevo	II line	3105 20	2067/50	5.1	
J.	, arjevo	11 11110	3102 30	1942/50	5.1	
7.	Velika Plana	1	3105 20	2067/50	5.1	
	1 011100 1 101100	-	3102 30	1942/50	5.1	
8.	Vranje	1	3105 20	2067/50	5.1	
			3102 30	1942/50	5.1	
9.	Vršac	11, 19	3105 20	2067/50	5.1	
		,	3102 30	1942/50	5.1	
10.	Grejač	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
			3102 30	2067/50	5.1	
11.	Žednik	1, 6a	3102 30	1942/50	5.1	
	Zmajevo	5	3105 20	2067/50	5.1	
12.	Zinajevo		3102 30	1942/50	5.1	
10	Zrenjanin	1 10	3105 20	2067/50	5.1	
13.		1, 10	3102 30	1942/50	5.1	
14.	Znanianin Eastamy	1	3105 20	2067/50	5.1	
14.	Zrenjanin Factory	1	3102 30	1942/50	5.1	
15.	Jagodina	1, 8	3105 20	2067/50	5.1	
15.	Jagouina	1, 0	3102 30	1942/50	5.1	
16.	Kikinda	20, 21	3105 20	2067/50	5.1	
10.			3102 30	1942/50	5.1	
17.	Kula	1	3105 20	2067/50	5.1	
<u> </u>			3102 30	1942/50	5.1	
18.	Lapovo	1	3105 20 3102 30	2067/50 1942/50	5.1 5.1	
		Station for	3102 30	2067/50	5.1	
19.	Lapovo marshalling yard	disinfecting	3102 30	1942/50	5.1	
20	Y 1	New track	3105 20	2067/50	5.1	
20.	Leskovac		3102 30	1942/50	5.1	
21	T -¥-1-	1 alsow	3105 20	2067/50	5.1	
21.	Lešak	1 short	3102 30	1942/50	5.1	
22.	Mala Krsna	1	3105 20	2067/50	5.1	
۷۷.	iviaia Kisliä	1	3102 30	1942/50	5.1	
23.	Mladenovac	1, 7	3105 20	2067/50	5.1	
23.	1,11440110 / 40	1, /	3102 30	1942/50	5.1	



24. Novi Sad Marshalling Yard Sad Marshalling Yard Sad Marshalling Park Sad Freight stations Sad Sad Sad Sad Sad Sad Sad Sad Sad Sad	
24. Novi Sad Marshalling Yard Sad Marshalling Locomotive and freight stations 2806 10 1789/80 8 1824/80 8 2031/80 8	
24. Novi Sad Marshalling Yard Sad Marshalling Locomotive and freight stations 2806 10 1789/80 8 1824/80 8 2031/80 8	
24. Novi Sad Marshalling Locomotive and 2815 12 1824/80 8 freight stations 2808 00 2031/80 8	
Yard freight stations 2808 00 2031/80 8	
1 2009 20	·
2815 11 1823/80 8	
2828 90 1791/80 8	
25. Ostružnica 1 3105 20 2067/50 5.	
3102 30 1942/50 5.	.1
26. Palanka 1 3105 20 2067/50 5.	.1
20. Falanka 3102 30 1942/50 5.	.1
3105 20 2067/50 5.	.1
7 / Pancevo varos	.1
3105.20 2067/50 5	.1
78 Donoovo Moin St	
	.1
170 Paracin	.1
3102 30 1942/50 5.	.1
30. Pirot 1 3105 20 2067/50 5.	.1
3102 30 1942/50 5.	.1
3105 20 2067/50 5.	.1
41 Pozarevac	.1
3105.20	
32. Požega 19 3102 30 2067/50 5.	.1
1 1 2	.1
3102 30	1
133 Prijepolje Brejant 113	.1
3102 30 1942/50 5.	.1
13/1 Proklinia	.1
34. Prokupije 1 3102 30 1942/50 5.	.1
Right dead-end 3105 20 2067/50 5.	.1
135 Recayica	.1
3105 20 2067/50 5	.1
36. Ruma 1, 2 3102 30 2007/30 5.	
3105 20 2067/50 5	.1
1 3 / SVII 9 in 9 c	
3102 30 1942/30 3.	.1
1 4X Canta 1 10 1	.1
3102 30 1942/50 5.	.1
1 39 1 Sombor 1 /11 / 1	.1
39. Somoor 20, 21 3102 30 1942/50 5.	.1
3105 20 2067/50 5	.1
I /III Sremcka Mitrovica I U	.1
3105 20 2067/50 5	.1
1/11 Stalac I short track	
	.1
1/17 Subotica	.1
freight station 3102 30 1942/50 5.	.1
1/13 C1CeVac	.1
3102 30 1942/30 3.	.1
44 Granii 1 3105 20 2067/50 5.	.1
1/// 1 (intil)	.1
3105 20 2067/50 5	.1
1/13 1 71Ce Hreight	.1
1/16 I Cacak I L-dead-end track I	.1
3102 30 1942/50 5.	.1
1/1/ I Sabac	.1
1,7 3102 30 1942/50 5.	.1



48.	Stara Pazova	7	3102 30	1942/50	5.1	
49.	Kruševac	1	3105 20	2067/50	5.1	
49.	Kiusevac	1	3102 30	1942/50	5.1	
50.	Vrbas	10,11	3105 20	2067/50	5.1	
51	Daimal	1	3105 20	2067/50	5.1	Only for goods
51.	Bajmok	1	3102 30	1942/50	5.1	in sacks
52.	Eutog	1	3105 20	2067/50	5.1	
32.	Futog		3102 30	2007/30	5.1	



Appendix 3.9. Alternative transport routes

No	Regular route	Distance (km)	Alternative route	Distance (km)
1	Subotica-Novi Sad	98.5	Subotica-Sombor-Vrbas-Novi Sad	150.5
2	Subotica-Novi Sad	98.5	Subotica-Sombor-Bogojevo-Novi Sad	165.4
3	Subotica-Novi Sad	98.5	Subotica-Zrenjanin-N.Sad	230.6
4	Subotica-Belgrade	175.6	Subotica-Zrenjanin-Pančevo- Belgrade	234.6
5	Novi Sad-Belgrade	77.1	Novi sad-Orlovat-Pančevo-Belgrade	148
6	Kikinda-Subotica	96.4	Kikinda-Orlovat-N.Sad-Subotica	271
7	Belgrade-Lapovo	109.6	Belgrade-Požega-Kraljevo-Lapovo	306.1
8	Belgrade-Lapovo-Kraljevo	194.3	Belgrade-Požega-Kraljevo	221.4
9	Belgrade-Niš	243.5	Belgrade-Požarevac-Zaječar-Niš	372.9
10	Belgrade-Požega	154.9	Belgrade-Lapovo-Kraljevo-Požega	260.8
11	Belgrade-Požega-Vrbnica(ŽCG)	299.3	Belgrade-Lapovo-Kraljevo-Požega- Vrbnica(ŽCG)	405.2
12	Belgrade-Smederevo	83.1	Belgrade-Mladenovac-V.Plana- Smederevo	132.8

Note: For departure/terminal station the names of the nodes are given, and various service points may be comprised within the respective node.



Appendix 3.10. Facilities for rolling stock maintenance

Maintenance of railway vehicles is performed in accordance with the Rulebook on Railway Vehicle Maintenance ("Official Gazette of RS", No 144/20).

Service facilities for provision of the basic services- where the works on the maintenance of vehicles are executed, and which are not carried out regularly as the part of daily activities requiring the vehicle to be detached from traffic are the organizational units of the other companies and Infrastructure of Serbian Railways JSC does not provide this type of services.

In accordance with the available data, service facilities and basic maintenance services provided by the Joint Stock Company for Passenger Railway Transport "Srbija Voz", Belgrade are as follows:

Location	Address	Facility	Primary Purpose	Basic Information		
	Milana	Depot Zemun	Maintenance of electric rolling stock and passenger coaches	Area: 10.200 m2 6 tracks of unit length 220 m		
Zemun	Rešetara bb	Depot for underfloor wheel lathe	Wheel processing of rolling stock	Area: 350 m2 It has underfloor wheel lathe without dismantling of wheel-sets		
		Workshop	Regular maintenance of electric and diesel locomotives	Area: 85 m2 Disposes of service canal of 36m and platform but without a canopy		
Lapovo	Maintenance Maintenance		Maintenance of electric and diesel locomotives and motor trains	Area: 1.part 1088 m2 and second part 625 m2 It has two running lines 2 out of which there are two canals on one line in the length of 50m and 20m. It disposes of single-axle weighbridge for measuring and adjusting the axle load of the rolling stock.		
Sombor	Braće Miladinom 1	Hangar Depot for	Maintenance of DMUs, and may be used for maintenance of freight wagons and diesel locomotives	Area:1337,5 m2 It has two tracks of the length 78 m and 24 m; it disposes of underfloor wheel lathe for wheel processing on rolling stock without dismantling. Area: 687 m2 has 1 track in the length		
		railbuses	Maintenance of railbuses and	of 78 m Area: 277 m2		
Zrenjanin	Dr Vase	Depot for railbuses	replacement of wheel-sets of 711 DMUs	1 canal in the length of 27 m		
Zienjanin	Stajica 2	Depot for DMUs	Maintenance of DMUs	Area: 432 m2 1 track in the length of 34 m		
Vršac	Pavliški put bb	Depot for maintenance of rolling	Inspections and extraordinary repairs of smaller scope on diesel traction units and	Area: 787 m2 Two tracks in the length of 40 m		



		stock	DMUs, as well as the overhauls of freight wagons	
Zaječar	Železnička bb	Workshop for repair of locomotives	Maintenance of diesel traction units and freight wagons	Area: 1250 m2 4 track out of which two are, unit length- 50 m

For more information on the provision of basic services in the above facilities responsible is their user in "Srbija Voz", Belgrade, Department for Rolling Stock Maintenance.

Contact point: Director of Department for Rolling Stock Maintenance - Mr. Vladan Petrović

Address: 6 Nemanjina St. 11000 Belgrade, Serbia

E-mail: vladan.petrovic@srbrail.rs

Phone: +381 64 845 22 64

Information on the service facilities and services provided by the Joint Stock Company for Freight Railway Transport "Srbija Kargo", are available on the web-site: http://www.srbcargo.rs/rs/usluzni-objekti. Information on the service facility and services provided by Šinvoz is available on the website www.sinvoz.rs.



SR PNEUMATIK

23000 ZRENJANIN, MANASTIRSKA BR. 13A PIB:101165889 MBR:54681496 TEL: 062/268-128, pneumatik.zrenjanin@gmail.com

INFORMACIJA O USLUŽNOM OBJEKTU SR PNEUMATIK ZRENJANIN

ZRENJANIN, april 2024




		. Opšte informacije
1.1.	Uvod	SR Pneumatik Zrenjanin je uradio Informaciju o uslužnom objektu na osnovu odredbi Pravilnika o elementima informacije o uslužnom objektu (Sl.glasnik RS broj 66/2019) Naziv uslužnog objekta je objekat za održavanje I spade u kategoriju 5, shodno članu 15. St. 2 Zakona o železnici (Sl.glasnik RS broj 41/18) Ova informacija je dostavljena upravljaču infrastrukture radi objavljivanja u Izjavi o mreži.
1.2.	Operator uslužnog objekta	Uslužnim objektom upravlja operator SR Pneumatik Zrenjanin, Manastirska 13a, kontakt Adamov Milivoj +38162268128
1.3	Period važenja I postupak ažuriranja	Ovaj dokumenat se ažurira po potrebi I nema definisan period važenja.
		2. Usluge
2.1.	Naziv usluge	Sertifikovana radionica za održavanje železničkih vozila obavlja usluge: - pregledi P1, P3,P6,P12 lokotraktora, drezina, lokomotiva; - tekuće održavanje (opravke manjeg I srednjeg obima) lokotraktora, drezina, lokomotiva; - kontrolni pregledi I tekuće održavanje obavlja se u depou vlasnika, osim kada je potrebno vozilo dovesti u pogon SR Pneumatik Zrenjanin. - specijalizovana radionica za održavanje kočnice železničkih vozila.
		Opis uslužnog objekta
3.1	Spisak svih postrojenja	Uslužni objekat SR Pneumatik Zrenjanin, sastoji se od sledećih postrojenja na lokaciji Zrenjanin Takovska 104: -radionica za popravku lokotraktora,



		Hala površine 500m2 (zatvorena I grejana), priključak na javnu drumsku mrežu. Radionica raspolaže svom potrebnom opremom, mašinama I alatima neophodnim za popravke I održavanje železničkih vozila u radionici I na terenu. Uslužni objekat SR Pneumatik Zrenjanin na lokaciji "Tatravagonka Bratstvo" doo Subotica, Bikovački put 2 Subotica: - Hala sa kolosekom I svim pratećim alatima I uređajima koji se koriste u procesu održavanja železničkih vozila se koristi na osnovu Ugovora o poslovnotehničkoj saradnji od 29.12.2023. godine.
		 Hala ima priključak na javnu železničku mrežu.
3.2.	Mesto	Zrenjanin, Takovska 104 Subotica, Bikovački put 2
3.3.	Radno vreme	Radno vreme uslužnog objekta je 7-15 časova ponedeljak-petak, osim za vreme verskih I državnih praznika
3.4.	Planirane izmene tehničkih karakteristika	Ne planiraju se izmene tehničkih karakteristika
		4. Naknade
4.1.	Informacije o naknadama	Metodologija: norma sat Naknada za pristup uslužnim objektima se ne naplaćuje. Cena za pojedine usluge po norma satu, u zavisnosti od složenosti posla po ponudi, nakon izvršene defektaže.
4.2.	Informacije o popustima	Uslužni objekti ne nude popuste

5.1.	Pravni zahtevi	Za pristup je potrebno sklapanje ugovora ili narudžbenica.
5.2.	Tehnički uslovi	Železnička vozila namenjena za rad na koloseku širine 1435 mm I maksimalnog osovinskog opterećenja 22 t.
5.3.	Samopružanje usluga	Uslužni objekat ne dozvoljava mogućnost samopružanja usluga.
5.4.	IT sistemi	Uslužni objekat ne nudi korištenje IT sistema
		6. Dodela kapaciteta
6.1.	Zahtevi za pristup uslužnom objektu ili uslugama koje se pružaju u objektu	Podnosilac zahteva je dužan poslati zahtev za ponudom za uslugu na e-mail :pneumatik.zrenjanin@gmail.com , ili usmeno na telefon +38162268128 Rok za obradu zahteva je 3 radna dana Prihvatom ponude, usluga se pruža na osnovu ugovora i narudžbenice. Po završetku usluge sačinjava se zapisnik o izvršenim uslugama.
6.2.	Odgovor na zahtev	Rok za obradu zahteva je 3 radna dana Usluga se temelji na osnovu ugovora, narudžbenice I zapisnika o izvršenoj usluzi.
6.3.	Informacije o promenama tehničkih karakteristika I privremenim ograničenjima kapaciteta	Uslužni objekat nema privremenih ograničenja kapaciteta koji mogu uticati na rad. U slučaju privremenih ograničenja, obaveštava se upravljač infrastrukture.



Milivo Adamov



Appendix 3.10a. Information on the service facility managed by Nelt Co



Nelt Co d.a.a. Maršala Tita 206 P. fah 530 11272 Dobanovci Srbija t +381 11 3779 100 f +381 11 3779 140 office@nelt.com www.nelt.com www.neltlsp.rs

PIB 100037645

Sektor za pristup železničkoj infrastrukturi Nemanjina 6, Srbija Datum: 21.12.2020.

PREDMET: INFORMACIJE O USLUŽNOM OBJEKTU – Industrijski kolosek "NELT Co", koji je deo Nelt Terminala

U stanici Surčin na pruzi Beograd Ranžirna, Park B - Ostružnica - Batajnica za javnu železiničku infrastrukturu kojom upravlja "Infrastruktura Železnice Strbije" ad priključen je industrijski kolosek čiji je vlasnik "Nelt.Co." d.o.o. Beograd.

Industrijski kolosek je namenjen samo za prijem i otpremu kolskih pošiljaka i isti se ne koristi za potrebe prevoza opasnih materija.

Industrijski kolosek počinje u nastavku četvrtog koloseka stanice Surčin odvojnom skretnicom br:2, u km. 14+166,57 pruge Beograd Ranžirna A– Ostružnica – Batajnica. Industrijski kolosek "NELT Co" doo Beograd, odvaja se od javne železničke infrastrukture, kojom upravlja "Infrastruktura Železnice Srbije" ad, u stanici Surčin koja je nalazi u km 14+635,60 (*sredina stanične zgrade*) jednolosečne elektrificirane pruge Beograd Ranžirna, Park B - Ostružnica - Batajnica.

Skretnica br. 1c industrijskog koloseka "NELT Co" doo Beograd , matični kolosek razdvaja na dva kraka odnosno na dva koloseka

Industrijski kolosek je ukupne građevinske dužine 1293,31m i sastoji se od tri dela i to:

- matičnog koloseke građevinske dužine 616,00 m
- Kolosek I građevinske dužine 348,00 m
- Kolosek II građevinske dužine 343,31 m

Koloseci I i II imaju korisnu dužinu svaki po 300 m tako da je ukupna korisna dužina na industrijskom koloseku 600 m.

Industrijski kolosek oposobljen je za kategoriju pruge C2 odnosno za:

- najveću dozvoljenu masu po osovini do 20 t/os (200 kN/os) i
- najveću dozvoljenu masu dužnom metru do 6,4 t/m (64 kN/m)

Koloseci I i II su na industrijskom koloseku vezani samo sa jedne strane tako da se na drugom kraju završavaju grudobranima,.

Manevru od stanice Surcin do Industrijski kolosek "NELT Co", za sada obavlja železnički operater "Srbija Cargo" ad.

Posedujemo 1 reach stacker kojim vršimo manipulacije kontejnera sa voza koji pristigne na Industrijski kolosek "NELT Co",

Cena za manipulacije punih kontejnera naplacuju se EUR 25 a praznih kontejnera EUR 20, obracunata u dinarskoj protivvrednosti





Nelt Co d.o.a. Maršala Tita 206 P. fah 530 11272 Dobanovci Srbija

t +381 11 3779 100 f +381 11 3779 140 office@nelt.com www.nelt.com www.neltlsp.rs PIB 100037645 MB 17304712

Radno vreme Nelt terminala je radnim danima od 08h – 21h, subotom od 08h-16h, nedelja je neradni dan. Praznicima ne radimo

Nelt terminala Ul. Maršala Tita 206, 11272, Dobanovci +381 60 8318595 +381 11 3779 33 www.nelt.com

S poštovanjem,

Interpredatni terminal Nelt

ag VIII

Appendix 3.11. Railway infrastructure development projects

The National Assembly, upon the proposal of the Government, passes the National Program for the railway infrastructure, which contains:

- 1. the existing characteristics and condition of the railway infrastructure of the Republic of Serbia;
- 2. strategy for construction, reconstruction and maintenance of the railway infrastructure;
- 3. development components in the construction of the new infrastructure capacities of special significance for the Republic of Serbia;
- 4. defining of the structure, time schedule for realization of priorities, level and sources of the financial assets needed for completion of the National Program activities.

National Program is passed for a five-year period.

Based on the National Program, the Infrastructure Manager prepares the annual program for construction, reconstruction and maintenance of the railway infrastructure, organization and regulation of the railway traffic.

No	Project	Estmated commencement of works (date or quarter)	Duration of works	Works' execution method
1	Modernization (construction and reconstruction) of railway line Belgrade –Subotica –state border (Kelebia) section Novi Sad - Subotica	December 2021	Q1 2025	As of April 7, 2022 complete traffic interruption is valid between the service points Novi Sad (excl.)- Subotica (excl.)
2	Civil engineering reconstruction of Niš – Dimitrovgrad railway line, section Sićevo - Dimitrovgrad	November 11 th , 2023	April 2026	Execution of the works and traffic performance according to the schedule: 36/36/36/60. Total line closure in the duration of 91 days starting from April 1, 2025 until July 1, 2025.
3	Electrification of Niš – Dimitrovgrad railway line, section Sićevo - Dimitrovgrad	March 2024	April 2026	Execution of the works and traffic performance will be realized alternately in intervals agreed with the Contractor.
4	Construction of northern bypass around city of Niš: 1. Crveni Krst – Pantelej – Matejevac 2. Trupale – Crveni Krst 3. Trupale – Niš Marshalling Yard	Q4 2023	Q3 2025	Execution of the works and traffic performance will be realized alternately in intervals agreed with the Contractor.



Appendix 4.1. Request for train path allocation (form)

Application form for train path allocation

	ertaking - opei	rator:					
Address:							
Contact perso	on:					·1	
Tel.		Fax.			e-mai	ıl:	
Place and dat	te:						
1 DACICI		ON ON THE DE	OHECTED	TD AINI D	A TIT		
1. BASIC	INFORMATIO	ON ON THE RE	Desired tin		Route		
Train type		Train No in the previous timetable	departure	arrival	from	to	via
NOTES							
2. TRAIN	TIMETABLE	INFORMATIO	N				
Stops in se	rvice points	Staying time points [min]	in service	Running	calendar		
		I					
3. TRAIN	INFORMATI	ON					
Type of	Additional traction				Brakin	g 	
traction, serial No of traction unit, route	units, serial No of traction unit, function in the train, route	Series and No of the wagon /motor unit	Train mass [t]	Train length [m]	Туре	Percentage [%]	Maximum train speed [km/h]
					1		
4. OTHER	REQUIREM	ENTS					



Appendix 4.1a. Request for train path allocation (e-papir)

Republic of Serbia

JSC "Infrastructure of Serbian Railways"

Rail Infrastructure Access Department

www.infrazs.rs

Business name / title

REQUEST

FOR TRAIN PATH ALLOCATION

Basic information about the applicant

Head office																
Contact phone																
Name and surname of the representative	ne							_								
Identification number							P	PIB								
Email address				•		·		·	·							
	Bas	ic data	a on th	ne re	quir	ed tr	air	n path								
	Numbe		D	esir	ed ti	me				R	Cout	te				
Train type	train previous		depai	rture	a	rrival		from		to			via			
				Not	e											
		Т	rain ti	meta	able	data	ļ									
Stops in service points	Stops in service points Staying time in se points [min]			ce Running calendar												
			Tr	ain c	lata											



	Additional				В	rakıng	
Type of traction, serial No of traction unit, route	traction units, serial No of traction unit, function in the train, route	Series and No of the wagon /motor unit	Train mass [t]	Train length [m]	Туре	Percentage [%]	Maximum train speed [km/h]
			Special	note			

I am aware that, if I do not submit the stated data, necessary for the decision-making of the body within 8 days, the request for initiating the procedure will be considered irregular.

The request can also be submitted on sektor.pzi@srbrail.rs

In	, on	
		Applicant's signature



INFORMATION FOR THE APPLICANT

Deadline for resolving the submitted request	30 days before the start of the timetable
--	---



Appendix 4.1b Template for submission of traction vehicle technical data


1. Series 1116 2. Description BoBo 3. Length 19280 mm 4. Weight 88 t 5. Maximum speed 230 km/h 6. Inertia factor 1,15 7. Resistance formula $W = a + b \cdot v + c \cdot v^2$ a = 1020

b = 8,44


c = 0.25

8. Traction diagram and braking diagram

V	Fv
[km/h]	[kN]
0	300
92	250
100	230
120	192
140	165
160	144
180	128
200	115
220	105
230	100

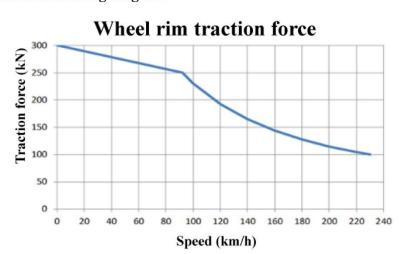

V	Fk
[km/h]	[kN]
0	100
40	100
50	170
60	240
96	240
100	230
110	209
120	192
130	177
140	165
150	154
160	144
180	128
200	115
220	105
230	100

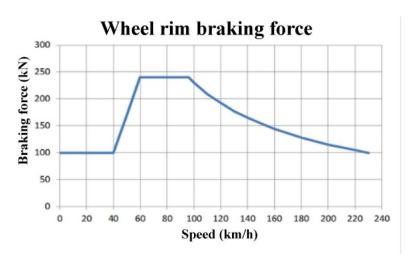

9. Traction type

electric



Appendix 4.2. Instruction for completion of the Request for train path allocation

		Specify train category:
	Train type	Passenger train (EuroCity, InterCity, express, fast, semi-fast, passenger, cross-border, suburban, train of accompanied motorcars, travel agent's train, empty train);
1		Freight train (single type of load train, single wagon load train, intermodal train, express, fast, direct, sectional, block train, pick-up goods train, circuit-working train, industrial, military, train with empty wagons, locomotive, test)
1.	Train No in the previous timetable	Specify the number of the train from the previous timetable, whose path elements match applicant's request (e.g. 541, 40760,)
	Desired time	Specify the desired time of the train departure from the origin station or the time of arrival to the destination station
	Route	Specify the origin and destination station of the train route and characteristic service point between those two stations which define the train route
	Stops in service points	Specify all service points where the train needs to stop
2.	Staying time in service points	Specify the needed staying time in each service point, in minutes
2.	Running calendar	Specify the days of the train running. For the trains whose running calendar covers several days, indicate the calendar on the entire route. In case a train path for an optional train is requested, indicate "Optional".
	Type of traction, serial No of traction unit, route	Specify traction type (electric or diesel), serial number of traction (operating) locomotive if there is change of traction on the required route
	Additional traction units, serial No of traction unit, function in the train, route	Specify number of additional traction units, traction units type (electric or diesel), serial number, position on the train (engine, double heading, banking,) additional traction unit running route
3.	Series and No of the wagon/motor unit	Specify wagon series (letter designation of wagon series) and number of wagons of the train i.e. series, number and serial number of multiple-unit sets (DMU/EMU)
	Train mass	Specify weight of all vehicles on the train including weight of operating locomotives
	Train length	Specify train length in metres without the length of operating locomotives



		Braking type: specify braking type (G, P, R, Mg,)
	Braking	Braking percentage: specify braking percentage which has to be considered during timetabling
	Maximum train speed	Specify maximum train speed considering characteristics of vehicles on the train
4.	Other requirements	Specify other requirements of the train such as: shunting of vehicles, change of train composition, connection, staff shift, type of intermodal transport unit, dangerous goods type, special consignments, hand-over procedures on border crossings, trains hand-over on mutual confidence, technical stops (inspection, water supply, waste handling and similar) and time period required, need for additional track capacities (side tracking, pre-heating/cooling, forming of trains and similar), need for access to other additional service facilities and similar.

Note: Upon receipt of the request for path allocation, $I\check{Z}S$ will provide the RU with the data based on which the RU will calculate the train running times and submit them to $I\check{Z}S$.



Appendix 4.3. Deadlines for annual 2024/2025 timetable preparation

Phase	Authority	Deadline
Submission of requests for path allocation for international passenger trains	RU	12.02.2024
Regular deadline for submitting allocation requests for annual timetable	IM	15.12.2023-18.04.2024
Coordination and harmonization of requests	IM/RU	09.04.2024-01.07.2024
Presentation of the First Draft timetable to RU	IM	01.07.2024
Draft review – remarks, suggestions, proposals and opinions	IM/RU	02.07.2024-02.08.2024
Draft timetable 2024/2025	IM	30.08.2024
Solving of problems and questions	IM	02.09.202409.09.2024
Extraordinary requests (remaining capacities)	RU	04.10.2024
Final deadline for capacity allocation according to extraordinary requests (remaining capacities)	IM	25.10.2024.
Timetable coming into effect	IM	15.12.2024



${\bf Appendix\ 4.4.\ Deadlines\ for\ amendments\ to\ annual\ 2024/2025\ Timetable}$

Amendment No	Submission date of requests for amendments to annual timetable	Deadline for capacity allocation	Application date for amendments to annual timetable
I	16.12.2024.	17.01.2025.	03.02.2025.
II	10.02.2025.	20.03.2025.	07.04.2025.
III	21.04.2025.	23.05.2025.	15.06.2025.
IV	07.07.2025.	15.08.2025.	01.09.2025.
V	11.08.2025.	19.09.2025.	06.10.2025.



Appendix 5.1. Overview of railway lines on which train running is possible when they are manned only with engine driver

Train running with engine driver only in a traction unit, without train crew (engine driver – without train crew), can be performed on the following lines:

- Belgrade Center-Stara Pazova Šid state border (Tovarnik);
- (Belgrade Center) Stara Pazova -Novi Sad Subotica state border (Kelebia);
- Belgrade Center Junction G Mladenovac-Lapovo-Niš-Preševo state border (Tabanovci);
- (Belgrade Center) Rakovica Jajinci Mala Krsna Velika Plana;
- Belgrade Center Pančevo Varoš (Vršac);
- Belgrade Center Resnik Požega Vrbnica state border (Bijelo Polje)
 - Section Resnik-Požega-Užice;
- Inđija Golubinci;
- Novi Sad Novi Sad Marshalling Yard Open line junction Sajlovo;
- Belgrade Center Novi Beograd;
- Belgrade Center Open line junction G (Rakovica);
- Belgrade Marshalling Yard "A" Ostružnica Batajnica;
- Belgrade Marshalling Yard "B"- Ostružnica;
- Belgrade Marshalling Yard "A"-Open line junction "B"-Open line junction "K/K1"- Resnik;
- Ostružnica Open line junction "B" (Open line junction"K/K1");
- Belgrade Marshalling Yard "B" Open line junction "R"-Open line junction "A"-(Resnik);
- (Belgrade Marshalling Yard "B") Open line junction "R" –Rakovica;
- Belgrade Marshalling Yard "A" Open line junction "T" Rakovica;
- Belgrade Marshalling Yard "B" Open line junction "T" (Rakovica);
- Connecting line in the area of Open line junction "K/K1": (Open line junction "B") switch "K" switch "K1" (Jajinci);
- Topčider Putnička (km 4+195) Open line junction G (Rakovica)⁴;
- (Open line junction Pančevački most) Open line junction Karađorđev park Open line junction Dedinje – (Open line junction G);
- By-pass line of Mala Krsna station: (Kolari) junction points 1 junction points 28 (Osipaonica);
- Open line junction Lapovo Varoš Lapovo Marshalling Yard Lapovo;
- Trupale Niš Marshalling Yard Međurovo;
- Crveni krst Niš Marshalling Yard;
- Niš Open line junction Most (Niš Marshalling Yard);
- Mala Krsna Požarevac (Bor);
- Pančevo Varoš Pančevo Vojlovica;
- Smederevo Open line junction Jezava Radinac Mala Krsna;
- Novi Sad Marshalling yard Open line junction Sajlovo.
- Subotica Horgos State Border (Röszke).

On the other lines, in particular cases, train running can be performed with engine driver – without train crew in compliance with terms stipulated in the Traffic Rulebook ("Official Gazette of the Republic of Serbia", No 34/22 and 107/22).

⁴ By virtue of the Conclusion of the Government of the Republic of Serbia No 340-2989/2022 dated April 7, 2022, the Decision of the Shareholders' Meeting of Joint Stock Company for Public Railway Infrastructure Management "Infrastructure of Serbian Railways" Belgrade concerning the termination of public railway traffic, dismounting and reconstruction of infrastructure capacities on railway line Topčider Putnička (km 4+ 195) – Open line junction "G" – (Rakovica), has been approved.




Appendix 5.2. Overview of the lines fulfilling the conditions for train running with an engine driver only

List of Infrastructure of Serbian Railways lines that do not meet the conditions for operation of traction units with an engine driver only (other lines meet the conditions):

- (Belgrade Center) Resnik Požega- Vrbnica- state border (Bijelo Polje)
 - Užice Vrbnica section.



Appendix 5.3. Geometry of pantograph (current collector) TIP POS - 254/III used on IŽS network

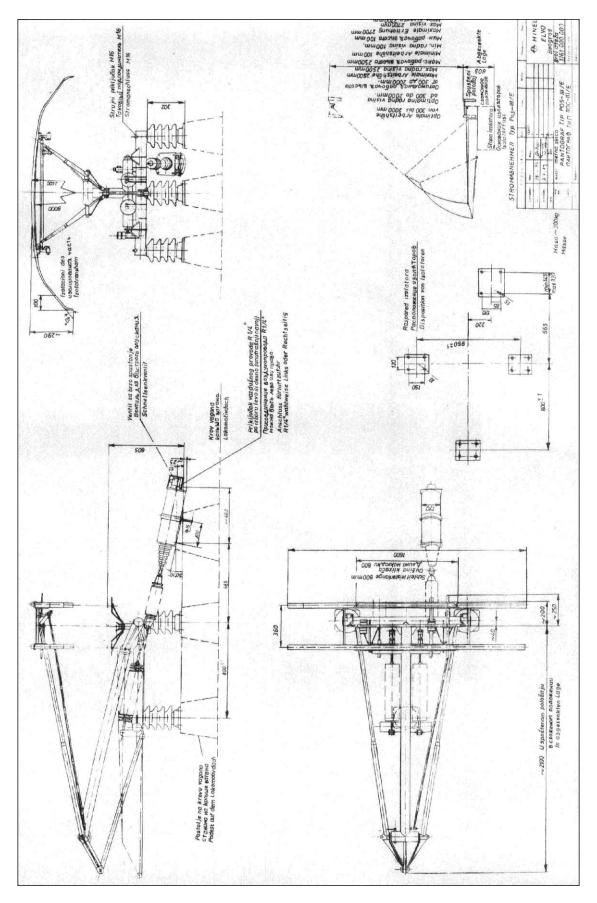



Appendix 6. Register of infrastructure data

	əbutitlA	30		97.6	82.1		92	87.6		84.3	79 11	84.96		79.11	84.96	101,57	96,94	102,06	100,96	91,7	81,77	84,66	87.20	83,79	86,71	96,2	CV,40						Ī					T		225.5	
	Loading gauge	63		H	ŽS-I	ŽS-I	ŽS-I	7.S.I	ŽS-I	ŽS-I	ŽS-I	ŽS-I		ŽS-1	žs-I		ŽS-I			ZS-I ŽS-I	ŽS-I	ŽS-I	7.S-I	ŽS-I	ŽS-I	ZS-1	1.0		-	ŽS-I	ŽS-I	I-S	ZS-I	7S-1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I
the line [daV]	←	28		H	10 Ž	Ž	1	250	Ž	2 Ž	- XX	Ž	H	8/1		3	2 Ž	Ž	+	2 3	Ž	3	7 20	+	Ž	2 2	- 1		-	N	7	- 2	200	1 1/2	4	- Ž	XV P	N X	, ,	14 2	15 Ž
Ruling resistance of	\rightarrow	27 2		F	-	H	4				-	3		1/01		\vdash	1		+	0 0	H	-	c	1		4 -	7		F	t	10	9	t		1	80		019	15	+	Ī
gradient	Slope	-			10	П		v.		2	-	0	T	1/0		9	2	П	v)	m 0	П	3	c	4		e -	1		r		7	0	T	Ť	3	0		_	0	100	-
Ruling	ənibal	25			0		4	0		0	-	6		0/6	3	_	1	-		0 0		1	c	70 1 1		4 -	1		L		œ	S			9			X	12		0
[0%] uo	Gradient of the statio	24		0	0,0		2.0	1.9		0.0	0.3						0,0			0,0			0,0			0,0			d	0,0		1,5			7,9			9,0	12.0		
sn	Minimum curve radi	23			500		269	200		2500	7000	5000		700	4993	2500	3000	4000	3000	10000	1300	10000	10000	1500		15000	OOOCI			300	700	300			400	300		300	300	300	400
	Open for the accepta dispatching of passer operations	22		Д	Ъ	Ъ	P/F ¹⁾	ч р	Ь	Ъ	P/F	P/F	ш	P/F	P/F	P/F	Ь	Ь	P/F	P/F		Ь	D/H	1/1		P/F			þ	4		Ь	Ы	Ь	P/F		Ь	P/F	괴	P/F	Ъ
	Occupancy of service	-		Д	ı Þ	П	ы	Þ		Ъ	F	Д	<u> </u>	Þ	<u>a</u>	Ы	U	T	ы	D A4	П	Þ	F		П	д	11		٦	4	Ħ	д	T		Ы	Þ		D :) þ	Ы	D
ппода	side-/end-basding pl	20				П	ω			S	V.	S		S	s s		S		S/E	ſΩ						SÆ			T		П				S	П		S	T	cΩ	
	Freight car scales	119				П																		T		Yes		1	(SE				T					1	Ī		
DIU	Service point code -	18		16052	16003	16012	16002	16001		16204	16501	16503	16204	16501	16503	16505	16506	16507	16550	16508	16510	16511	16512	16514	16515	16516	/1001		- (Tabanov	10032		16103	16102	16101	15501	15401	15408	15402	15404	15405	15406
he service point	Manner of securing t	17		E	-		11	Ξ	-	11	=	-	-	+	+-	-	1		-			1	-	4		1			- porder -	1 1	1	1		-	Т	1		<u>-</u>		1	1
ព០ដៃនណ្	Manner of traffic reg	16	(Jim	mk)	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT		RC with TWT	RC with TWT	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	stanon custance		- state	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with AB	RC with AB	with	RC with AB	RC with AB	RC with AB
	acceptance of the longest trains		LINES Šid., state border - (Towarmib)	5 and 6	4 and 5	Ħ	8 and 9	1 and 2		5 and 6		4 and 5	9 and 10		5 and 6	4 and 5	4 and 5		4 and 5	4 and 5 2 and 3	П	2 and 3	4 and 5			4 and 5			N - 00	o alle c	П	5	t		3	and 2		4 (1 3	2	2
Direction B→A	Luscks tor	Ш	rder	- Iam I		Н		+	\vdash				-		1			\vdash	\neg				_	-	П	\neg	4		Lapo	_	Н		+			П					
1.3-5000	Maximum permitted train length	Ĩ	tote ho	1916 UU	628		411	209		238		651	770		443	749	786		653	672		299	673	ò		707			ovac.	200	Ш	702			730	707		781	710	692	681
A ←A	Tracks for acceptance of the longest trains	13		· V	2 and 3		1 and 2	3 and 4		1 and 2	1a and 4	1 and 3	9 and 10	2 and 3	1 and 2	2 and 3	2 and 3		2 and 3	2 and 3 4 and 5		4 and 5	2 and 3	Come 7		2 and 3			- Mlader	3 auto		4			3	1 and 2		4 (n -	2	2
Direction	Maximum permitted train length	12	MAIN.	506	+	П	550	199	-	227	133			-	+				712	731	П	614	553	+	\vdash	999			akovica	300	П	702	İ		730	709		777	659	692	681
sbeeq	Left track	=			100	•		120			t	200	E-	120	160 T						0						xed, Šid)	8	S	20		08		70	-					-	
Maximum permitted	Right track	10	01 Releaseds	agran	100			120			t	200 "	E	120	T 091			120		50			30	3		0	on distances for freight traffic (mixed,		ION	50		80		70		30		ć	8		30
,	Railway line categor	6	10 B,		D4	D4	D4	D 7	_	D4	D4 D	_	$\overline{}$	D4	+	+	D3	_	D3	D3	D3	D3	D3	D3	D3	D3	eight tra			D4	D4	D4	D 7	7 7	70	D4	D4	7	D D	7	D4
3	Class of railway line	∞	-	╁	M	Н		≅ ≥	-	M	Z Z	1	+	Σ	+	+		+	+	ZZ	Н	Σ;		+		+	for fre		INE	M	Н	\dashv	-	2 2	+	Н		+	ZZ	+	М
пие	Single/double-track l	7		t	Д	Д	2000			D	ДС		┢	0	200		D					Д		+			tances	- 1	300	Д	Δ	1000		10		S			20 20		H
	Type of service point	Н		E		8		2 -	-		9 1		-	1	+			_			_				3	-	on dist		OPEN	1 9	Н		8 4	+	-	- 2	3	+	7 7	-	
	ajou so jizos jo vai.																											- 1													
	Name of service point			0+000 BEOGRAD CENTAR	3+442 NOVI BEOGRAD	5+216 TOŠIN BUNAR		235 ALTENA 248 ZEMIN POLIF		19+031 BATAINICAP	22+006 KM 22+006 SC 27+106 NOVA PAZOVA P	34+944 STARA PAZOVA P	20+616 BATAINICA F	27+106 NOVA PAZOVA F	34+944 STARA PAZOVA F	44+361 GOLUBINCI		800 KRALjEVCI		419 VOGANJ 721 SREMSKA MITROVICA			99+200 KUZMIN 105+018 KTIKTITEVCT/EDDEVIE	100 BAČINCI		365 SID	data for service points and station distances for passenger traffic (Novi Sad); ^T data for service points and stat	$^{1)}$ for the purposes of arrival and departure for the TPS Z emun	102 Beograd Centar	1+337 OPEN LINE JUNCTION DEDINJE	4+416 OPEN LINE JUNCTION G	8+533 RAKOVICA	KNEZEVAC	KUEVO		930 PINOSAVA	121 RIPAN KOLONIJA	_	760 KLENJE 592 RIPANI TUNEL	34+730 RALiA	41+508 SOPOT KOSMAJSKI
	Chainage			0+0	3.442 3+4	1.774 5+2	10.1	1.195 12+248		5.232 19+0										8.364 73+419 8.302 81+721			5.124 99+200		\vdash		ors and station dist	rival and depar	910	1.337					1000	371 17+9;			29+2		
	Distance in km	3		L	3.4	1.7	3.3	1.19	1.55	5.2	2.975	7.8		*6.556	7.8	9.417	*8,708	9.9	5.0	83	4.3	7.5	5.5	4.0	3.6	3.6	e points	ses of ar			3.0	*1,738	2.167	0.849	2.3	3.87	2.191	1.1	3.443	5.1	6.77
public transport	Left track	5]			786I 198°0	12.	.6I .0I		.683	81.2	1.10					23.03.1993.	.8	288	1.2.1	.10			168	1.01	.70		servic	odind.	- 1	0.57	1	.188	81.6	0.50	0			.60	4.		
Date of Dandover to	Right track	(-		't	0.E0			.82	61.0	1.1	0					2009.		1.1				.826	1.19	1.2.1			Pdata for	D for the		0.57	-	·126	61.6	0.71	ī			03.09.	1884.		



	əbutitlA	30		T		p e		4.5 Y. V.					103.9	107.0	105.4		1	107.4		115.3		1263			134.6	136.4	141.1	144,6		1 40 £	140.3	395-3		164		1/3.4	167.7			184.9			190.5
	Loading gauge	59	ŽS-I	1.07	ŽŠ-I	ŽS-I	ŽS-I	ŽS-I	ŢS-I	ZS-I	1-87 ZS-I	ŽS-I	ŽS-I	72.1	ŽS-I	ŽS-I	ŽS-I	ZS-I	7.S-1	ŽS-I	Į-SZ	ZS-I	ŽS-I	ŽS-I	ZS-1 ŽS-1	ZS-I	ŽS-I	ŽS-I	ZS-I	ZS-1	1.07 7.8-1	ZS-I	ŽS-I	ŽS-I	ŽS-I	1-87	7.S-1	78.1	ŽS-I	ŽS-I	ŽS-I	75.1	ŽS-I
[Mab] ənil ədt	←	28	4 4	┿	,	4		4	-	-	n	Ħ		٥	9	Н	Ť,	n		3		~	₩		4	3	S	7	+	n r	+	F		2	+	+	n			1		Ť	
Ruling resistance of	\rightarrow	27	1	n -	-	3		-	4	71 0	7		v,	4	4			4		4		v	,		4	3	9	4		4 -	4			7	t	,	2			9		1	
gradient	Slope	26	4	7 4	,	4	6.8	4	1	r 4	0		9	٥	9	Ц		3		3		۲	,		4	9	3	2	,	7	7			2		4	n			9			
Ruling	Incline	25	1 0	7 -	1	3			3	_	٥	Ш		4	4	Ц		4		4		4			4	6		3		0 0				5			7			9	Ц	1	
[0%] uc	Gradient of the statio	24	3,5	C, 4	Ś	1,3		1,1	6,5	7,0			4,0	3,0	0,0			0,0		1,5		0.0	Ś		4,4	0,0	5,0	4,(ļ	1,0	1,1			0,0	ì	0,0	o,			0,0			0.0
sn	Minimum curve radir		800	520	070	500		800	500	950	945	1000	700	00/	500	1000	006	800	800	800	480	350	1000	2000	1150	1000	300	299	350	350	500	500	500	2000	700	1000	1000	10000	1200	1200	700	1500	1300
ngers/freight	dispatching of passer operations	22	P	4	٠, ۵	P/F	Ъ	Ы	P/F	П	5	Ъ	P/F	<u>م</u> ابد		д	д.	P/F	ы д	P/F	ы	P/R	Ь	Ъ	P/F	P/F		Ъ	a,	<u>ا</u> ا	4	Д	Ъ	P/F	ы	1 1	<u>.</u>	4 A	, Д	P/F	ы	ء ہ	P/F
nce and	Open for the accepta			+			=8	-	4	-	\perp	Н	4			Н	-			Н		Į.		Ц	-		Н	_	-						4		+	-	H		4	+	
7000 VICENSON	Occupancy of service		D	+		ū		\vdash	+	Þ	_	Н	+	4	ы	Н	- 1	4	+	Ь	-	Δ.	+	Н	Þ	Ы	\vdash	Þ	- 1		+	-	H	U	+	+	4	-	+	Ь	+	+	ы
шодв	Side-/end-loading pla	Н	O	2		S	4 8		Ω	0	2	Н	S	+	+	Н	4	4	1	Ω	_	V.	2	Н	Ω	S	H	4	4	0	2	-		S		2 0	2	-	+	Ω	4	+	ι
	Freight car scales	19		+	+				-	+	+	Н	-	+	+	Н	4	+	+	Н		+	Ł			+	H	+	+	20.00	100	-	L			+	\pm	+	H	Н	+	+	+
oiu	Service point code - 1	18	15407	13701	13702	13703	13704	13705	13706	13707	13402	13403	13404	13405	13450	13301	13302	13303	13305	13350	13307	13310	13311	13312	13313	13352	12501	12502	12517	12503	12505	12506	12519	12507	12508	60071	12510	12520	12512	12513	12514	12515	12516
tniog əsivrəs əd:	Manner of securing t	17	1	1-	1	1		П	-		1	Н	п,	1	-	Ц	_	-	+	-			4	Н	-	н	н	-		4	1	_		1	٠,	٠,	-	-		П	4	+	-
ព០ដិនប្រ	Manner of traffic reg	16	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	AB AB	AB	AB	AB	AB	AB	AB	AB	AB	AB	AB	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	KC WILL IWI	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT	RC with TWT
	acceptance of the longest trains	15	4 6	0 %		2		3	3	3	7	H	S	t	4 and 5			and 5	t	4 and 5	1	and 4			4 and 5	2		7			Chille	-		2 and 3	-	5 and 4	2 and 3			3 and 4	\dagger	t	+
Direction B→A	Tracks for Tracks for	Ш		╀	1						_			+		Н	- 1	4	+	Н	-	۳	,	П		-	Н	4	-	,	1									Н	1	+	\
	Maximum permitted		656	838	G	969	Ц	797	642	742	000		812	-	657	\vdash	+	979	-	715		679	+	Н	620	825	\vdash	612	-	677	+	L		508	-	100	+			665		1	738
H-A A→B	Tracks for acceptance of the longest trains	13	4 6	۳ و	,	2		3	3	e .	2		4		2 and 3			2 and 3		2 and 3		5 and 6			2 and 3	3 and 4	2	3 and 4	•	4 200 4 5	4 allu 3			4 and 5	-	7 DIE I	4 and 5			2 and 3			3
Direction	Maximum permitted train length	12	667	838	200	693		862	647	746	/03		855		530			710		788		702			615	559	799	648		677	000			574	100	667	543			571			744
pəəds	Left track	11							_			30	ı	100	2	8	20		70		9	120		20	-	8					T						001	201					
Maximum permitted	Right track	10	100	5		50			100				70					30			9	120		30	Q H	100	30	3	;	S							100						
λ	Railway line categor	6	D4	100	7 7	D4	D4	D4	D4	7 2	D 24	D4	D4	4 5	7 7	D4	D4	D4	D4	D4	D4	7 P	D4	D4	D4	D4	D4	D4	D4	D4	7 2	D4	D4	D4	D4	7 2	40 6	7 7	D4	D4	D4	D4 C	7 P
	Class of railway line	8	M				M	Н	_		Z Z	0.0		Z 2			201	201 3	Z Z	Н		Z Z		9339	Z Z		\vdash		_	Σį		+				z ;	+		Z	Н	Z :		
əun	Single/double-track l	Н	02 0	+	+	+	Н	H	S	+	+	H	\pm	9 6	+	Н	+	+		Н	+		t	Н	Д	+	H	\dashv	+	02 0	+	+	H	D	\pm	\pm	2 6	+		Д		╅	a a
11655	Type of service point	Н			3 1	+				+	-	Н	Ξ,	+	+	Н	+	+	+	Н	+	9 -	+	3		+	Н	+	-		1 6	+		220	3		+	-				+	
, ,	ming anivrae to agyT	9	1	T	1 6	1	3	2			3	3		~ "	, -	3	3	- 1	2 6		3	9	3	63		,	2	1	3	2 -	- 6	3	3	1	e -			3 0	0 60	1	60 6	E 6	7 -
	Name of service point	5	VLAŠKO POLJE			67+550 KUSADAK	RATARE	74+000 GLBOVAC	78+564 PALANKA	MALA PLANA	907434 VELINA FLANA 94+000 STARO SELO	NOVO SELO	100+302 MARKOVAC	108+011 LAPOVO VAROS 108+001 I APOVO MARSHATI ING VARD		114+100 BRZAN	MILOŠEVO	BAGRDAN	120+950 LANIS1E 131+395 BUKOVČE	JAGODINA	GILjE	145+981 OPEN LINE JUNCTION CUPRIJA 142+645 PARAĆIN	163+670 SIKIRICA/RATARI	-	CICEVAC TITIČINA	176+310 STALAĆ	STEVANAC	186+486 BRALjINA	190+400 CEROVO/RAZANj	STAROTRUBAREVO		201+400 DONILLIUBEŠ	GORNJI LJUBEŠ				ALEKSINAC			GREJAČ		MEZGRAJA	234+939 TRUPALE
	Chainage		47+748		+925	+550	70+320	000+	3+564	5+570	94+000	97+725)+302	108+913		1+100	116+975	120+300	+395	135+237	140+700	+645	14670	909+9	171+600	+310	181+900	+486	400	192+216	+193	+400	203+500	205+617	000+		214+197			222+705		229+309	1+939
	aoenied")	4	88											1		Ш					_	-															_	_	_			_	
	Distance in km	3	6.240	5.304	2.869	4.625	2.7	3.680	4.564	7.006	3.566	3.725	2.577	1.688	1.599	4.500	2.875	3.32	4.445	3.842	5.463	5.281	*8,582	2.930	5.000	2.710	5.590	4.586	3.914	1.816	4.254	2.207	2.100	2.117	2.383	2.460	3.717	1317	3.285	0.635	5.245	1.359	2.349
transport	Left track	2		- 1-		03.09.	1884.							·t	881	.60.	£0	- 600	-389			3.44	†8	81.6	ε	196.		6	1884.		21.00		066	1.2	0.10		T		.48	38 T.	60.8	0	
public						Ö	200													_			-1		35		1	ō	00								- 1						



	sbutillA	30	188.8		183.3	183	194.1		194			201.6		211.5		217.0	220.0	248.2	255		282.6	297.2	306.9	7 7 6 6	333 3			346.7	367.5	5/1.9	383.0	397.7		427.2	459.2					129.9	148.8	124.6	13.4		178.6	157.0
	Loading gauge	53	ŢS-I	ŽS-I	I-SZ	I-SZ	1-S-1	ZS-I	1-62-1-87	ŽS-I	ŽS-I	ŽS-I	I-SZ	ZS-I	1-S7	¥2.1	1 1 1	ŽS-I	ŽS-I	I-SZ	ŽS-I	ŽS-I	Į-SŽ	1-S2	78.1	ŽS-I	ŽS-I	ŽS-I	Į-SŽ	72.1	ŽS-I	I-SZ	ŽS-I	ŽS-I	ŽS-I	I-SZ	İ		ZS-I	1-SZ-1	ZS-I	1-SZ	ŽS-I	ŽS-I	ŽS-I	I-SZ
the line [daN]		28	Н		+	_			2					-				-	H	+	T.	1						4	7	2	3	-	-	1		15	ŀ	T	+	+	9	10	_		Н	6
Ruling resistance of	\rightarrow	27	5	Ħ		6	7		4	T		7		S	İ	c	1 4	40	9	,	7	9	00	t	- 1			7	-	۰	S	ъ		8	13		İ	T	13	13	=	1.	00	П	11	S
gradient	Slope	26	2	7	4	9	٥,	н.	2	0	0	0	1	1	0	0	0	-	-	1	3	1	0	4 (7	0	0	5	3	4 4	3	0	2	1	0	13		_		7	S.	6	0		0	ш
Ruling	ənibal	25	8	0		_	7		1 4	-	2	-	_	S	7 (1 0	_		_	_	8	9	-	_	م م	'n	9	2		n v	-	6	8	8	14	_	ļ			2350	∞	0			6	
[0%] u	Oradient of the statio	24		ш	_		1,58		0.71	_		0,91	_	2,44		1.71	_	2.8	7	-	4,04	5,65	3,7	_	4.70	-	L	2,69	_	760	7.5	7		11,0	1,1			4,9		7,9		0.1		\perp	8,7	
sn	Minimum curve radio	23	950	550	295	300	8	2000	700	0	4000	20000	1900	1000	1600		2000	2500	327	300	290	300	300	300	300	950	400	1000	400	450	350	350	450	009	400	300			350	300	7.70	300	300		275	350
nce and gers/freight	Open for the acceptar dispatching of passen operations	22	P/F		P/F	P/F	4	م ا	P/F	Ы	Ь	P/F	Д	Ы	م ا	4 0	P/F	1	P/F	Ы	P/F	Ь	Ы	8	4	Д	Ь	Ь	P/F	4	P/F	P/F	Ь		P/F			д	ſ	ء ا	4 4	٦ ۵	, д	Ь	Ь	Ы
	Occupancy of service	21	Ъ	Ħ	Ь	а ;	3	- 16	Д	t		Þ	Ħ	ь	+	E	0 0	, p	Þ		D	n	D	E	- E		Ħ	n	D	7	д	Ъ		U	Ь	T	ŀ	Ъ	D f	4 5	5	þ	þ	Ħ	n	D
шода	Side-/end-loading pla	20	S	T	S/E	,	2		ζ.			Ω		Ω	T	Ī	V.	2	ď	2	S/E		T	7	2		Г			2	S	Ω	-		S	П	İ	T	T	T	T	T	T	П	П	٦
	Freight car scales	⊢					1		t				1	1	İ	t	t	t					1	İ	T				1								İ			İ	I	İ	İ	Ħ		
orc	Service point code - 1	18	12550		12551	12301	12302	12304	11001	11002	11003	11004	11005	11006	11007	11008	11050	11010	11011	11012	11013	11014	11015	11029	11017	11018	11030	11019	11020	11021	11023	11024	11025	11026	11027	11028		16103		15602	15603	15604	15605	15606	15607	15608
he service point	Manner of securing th	17	T	1	-	-	-		-			-		-		-	٠,	-	ī		-	ī	-	,				1	-	1	Н	Н		T	T		I	-	= .	₫.	-	-	1 -		1	Н
notislu	Manner of traffic reg	16	AB	AB with TWT	AB with TWT	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	DC with AB	RC with AB	RC with AB	RC with AB	RC with AB		RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	station distance	- Mala Krsna - Velika Plana	T. Carrier	AB	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB
	ongest trains	S	3		3	1,	+		3	H		2 and 3		2		-	2	_	4		3	3	2	+	s -	+	H	2	2	and 3	3			1	3	٦	· · Velik	5	-	4 (_	and 2	3	Н	2	2
Direction B→A	Lesin length	_	Н		4	4		-		Ļ				4	+		L			L	L.		4	+		-	L		- 1	7					57 11	Ц	Krsna	3.0			-	+	1	Н		
	Maximum permitted	14	662		488	543	940		601			623		632		750	648	069	526		648	632	708	3	865		L	653	648	nco	623	603		684	509	_	- Mala	702	Î	706	2/2	801	714	Ц	613	603
Æ←A	Tracks for acceptance of the longest trains		3		ю.	-	-		4			2 and 3	5	7		-	7	-	4		3	3	7	¢	n -			2	7	7	3	1		1	3		- Jajinci	4		4 (e	1	4 60		1	7
Direction	Maximum permitted Train length	12	989		490	580	929		009			809		639		733	509	989	537	à	889	969	700	CES	7/6	3		651	648	048	618	643		289	610		- Rakovica	702	1	710	643	815	711	П	909	969
pəəds	Left track	Ξ		09	:							Ī		Ī				_																						1						٦
Maximum permitted	Right track	10	50	30					20				30		9	3	0.000	100	65		50			જે -			50		15.00	8		50	30	CK.	40		grad centar	08		00			65		_	
8	Railway line category	6	D4	D4	D4	D 1	4	4 5	4 4	D4	D4	D4	D4	Ā	7 7 7	\$ 2	2 5	7 4	D 4	D4	D4	D4	D4	7 5	4 C	D 4	D4	D4	D4	7 5	7 4	D4	D4	D4	D4	<u>4</u>	(Beogn	D4	D 4	4 5	7 5	7 Z	7 4	D4	D4	D4
	Class of railway line	8	M	M	X.	Z :	Σ ;	M	Z	M	M	Z	Z	×	M	Z Z	2	M	×	M	M	M	Z :	Z :	2 2	×	М	M	Z :	2 2	Z	M	М	M	М	Z	103	j	Z;	M	Z	ž Z	×	M	M	Z
əui	Single/double-track l	7	S	D	D	S	22	S C	o co	S	S	Ø	S	Ω	SO C	2 0	2 0	2 CO	S S	S	ß	S	S	Ω	2 0	S	S	S	S	2 0	S	S	S	S	S	ß	1	S	S C	ω c	v v	2 02	S	S	S	Ø
3	Type of service point	9	1	12			7	e ,	o	3	3	-	3	-	n .	o c	1 -	2	-	3	-	2	7 (e .		3	3	2	- ,	٦ ٢	,	-	3	2	1	13		=	9 ,	-	- "	0 4	1 -	3	2	-
	Chainage Name of service point	4	6.066 241+005 CRVENI KRST				253+946		99 23 7010 MALOSISIE 441 261+451 DOLIEVAC	263+261	265+854			275+564	267 278+831 ZIVKOVO			295+779			312+725	319+671	_	356+378	5.255 529+591 VEADICIN HAN 4.475 334+066 SITVA MORAVA		339+055		348+015	0.191	365+725	-		386+550		8.143 400+452 STATE BORDER			3+708		119 16+277 BELI POTOK 20+350 ZTICR		24+885			
Magnitus → Superior	Distance in km	3	6.0	1.7	0.842	5.8	4.484	1.495	4.441	1.8	2.593	2.088	2.892	4.730	3.267	1 675	4	8.211	6.084	6.74	4.115	6.946	3.21	3.452	4 475	2.0	2.920	2.3	6.578	7.7	43	7.967	7.0	5.8	5.7	8.1				*1,581	*5,419	0.8	3.643	2.955	3.425	5.6
handover to public transport	Гец ітаск	H	120	.6	,																1888.																		20.10.1988.							
Date of	Right track	L	03.09.	0.5																	40																		20.1	\perp		_	_	_		



	əbutitlA	30		133.4	123.4		108.5	6.86		83.0	T	83.1	1.00			83.6		92.6	99.8	111.4		119.8	126.3	94.06	111	142.2	81.2	(.Y.)	82.1		2 60	84.5	83.3	83.5	83.6	84.2	107.4	9.66	109.4	110.2	109.9	108.1	110.3	110.5
	Loading gauge	29	ŽS-I	78.1	ZS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	78-1 78-1	7.S-I	ŽS-I	ŽS-I	I-SZ	ZS-I	7.S-I	7.S-1	1.3		ŽS-I	ZS-I	r	ŽS-I	ŽS-I	7. S-I	rsz.	ŽS-I	ŽS-I	1-57	78.1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	78.1	ŽS-I	ŽS-I	ZS-I	ZS-I
the line [daV]	←	28	+	2	S	+	+	4	T	S			4	╆		-	+	+	4 4	-	-			ŀ		\vdash	-	0	0		r	- '0	┿	╁	7	4	2	+	9 0	+	2	+	3	1
Ruling resistance of	\rightarrow	27														-		n o	» o	<u></u>		6			10	∞ .	-		2		V	o 67	0		7	4	S		9 0	0	2		3	
grandlent	Slope		-	٥	4	Н		4	1	4	4		3	⊢		-	١		4 4	-	-	0		L	0	\vdash	+	0	0		r	- 4	m		7	4	7	+	0 0	n	7	9	m	
Ruling	Incline			٥,٥	2,2 0		2,0 0	0	╀	7 0	+	+	1.4		Н	0,0		4,6	00 00	•		∞	_	-	5.5 10	1,0 8		3.0	4.0 2			4 5 3		0	7 0	0 4	5	_	0 0	2	0 2	- 1	3	4
[0%] uc	Gradient of the statio	24							\perp	0,7	4	1										Ц		-			\perp		- "	Ш		L			0.0		0.0	+	0.0	7	0.0	_	7	
sn	Minimum curve radi	Ш	050	32	700		700	1000		280			700			1000	0	800	200	5					4500	3500	3500	1300	1200		202	200	2500	2500	3000	300		1600	703.	7200				
ngers/freight	dispatching of passer operations		Р	4 4	Ь		Ь	러 6	4	P/F	,	a, a	4 4	Ы	Ъ	Ь	Ы	<u>م</u> ا	P D/T	1/1		P/F	P/F	D/0	P	Ъ	F	4	Ь		٩	4	P/F		P/F	P/F	P/F	م ا	4	112	P/F	1	P/F	
	Open for the accepta	1	-	-	D	Н	ח	0.	+	Ъ	+	+	-		H	Ы	,) t	-			Н	Ъ	6		Ы		0	U	H	-	ų Q	2.0	ŀ		ď	Q,		Q, G	+	ď	-	0. 1	Q,
	Side-/end-loading pl		-	+	٦	H	n	ы	+	S	+	+	+	H	H	S	,		0	-	-	Н	S	0	+	n		+	1	H	+	1 2	S	-	S		S		7	7	S	-	1	J
шодо	Freight car scales	Н	+	\dagger	H	H	-	+	+	-	+	+	+	t	H	*	+	$^{+}$	Ť	1		Ť	**	F	+	Н	$^{+}$	╁		H	+	1	24	-	2.2	0.2	0.2	+	+	t	24	+	+	+
			91	2 0	2 =	12	13	4 6		12	1	2 5	1 2	80	0	4	35	9 5	2 2		-	12	01	5	2 10	32	5 2	9	22	H	9	0 ~	22	33	×	92	77	77.5	2 33	¥ 12	3 8	88	8 :	2
oin	Service point code -	18	15616	15610	15611	15612	15613	13500	13309	13551	1	13502	13503	13508	13510	135	13505	13506	13507	5		13351	13310	16502	16801	16802	16805	10000	16807		16909	2330)	23302	233	23304	23306	2340.	23402	23403	23404	23407	23408	234(23410
the service point	Manner of securing t	17	•	-	1		1	1	-	-	-		7			-	Į.	-		1	9	ø	1	_	===	= :	=	7	11	5.00	F	7	Į	7	Ţ	Ţ	I	1	Ţ	7	I		Ţ	
																						9	e		Н	L	<u>.</u>	, L	T	e	e e	3											1	ace
ពលជិនបែក	Manner of traffic reg	16	RC with AB	RC with AB	RC with AB	RC with AB	with AB	RC with AB	AB	AB	RC with AB	RC with AB	RC with AB	RC with AB	RC with AB	with AB	RC with AB	RC with AB	RC with AB	WIII AD		station distance	station distance	Subotica - state border - (Kelebia)	RC with TWT	RC with TWT	RC with TWI	RC with TWT	RC with TWT	station distance	station distance	station distance	AB	AB	AB	AB	AB	AB	AB	AB AB	AB	AB	AB	block post distance
			SK.	X 2	E S	RC	RC	R	ı		2	× ×	2 2	RC	RC	RC	RC	2	3 2			stati	statio.	der -	RC	RC	RC RC	RC R	RC	stati	stati	Stall											2000	block
1	longest trains	Н	+	+	+	Н	+	+	+	H	+	+	+	+	H	+	+	+		Ćuprija - Paraćin	H	Н	-	Te bor	2 2	7	,	4	3	\dashv	-	,	8	H	4	4	4		20	n	4	-	3	
B→A	acceptance of the		,	0	6		3	7	ı	4			2	Ó		ю		m r	74 5	priia		7	4	- stat	1 and 2	and 2	0.00	7 nue 1	2 and 3		Pag P	alle.	2 and 3		3 and 4	3 and 4	3 and		I and 2	z aua	3 and 4		and	
Direction	Tracks for	4		7	7	Н	8	9	t	53	Ħ	t	45	t	1	0		9 9	2 4			7.		ootica	\top		_	1		H	+	+			П			_	\top				0	1
	Maximum permitted	1	- 1	019	617	Ш	628	586	1	633	4		545	1	Н	610	_ ;	476	589	iii o	_	167	_		-	\vdash	+	/57	725		-	64	785	\vdash	812	\vdash	766	+	929	\	731		780	_
a←A	Tracks for acceptance of the longest trains			2	3	Ü	3	7		4			2	ř S		3		m ,	۲۹ ۲۰	unction Cupriia -		3 and 4	5	Novi Sad	3 and 4	3 and 4	b ban C	2 allu4	4 and 5		Spand	comp +	2 and 3		3 and 4	3 and 4	3 and 4		land 2	z ana s	3 and 4		2 and 3	
Direction	Maximum permitted Train length			570	612		630	602		679			545			809		581	594	- 1955 1955		240			366	694	247	/+7	636		407	764	772		918	943	764	9	663	76/	731		777	
pəəds	Left track	11	0.000				_								-					ao-			_ (ara Pa	000	707		160	130	071	100			STANCE OF			75000				40000			
Maximum Permitted	Right track	10	80				100			O.S.	8				100					godina)		oc	100	ıtar) - Stara		7007	1	160	-	170	100		0	80		09	80				40			
Ä	Railway line categor	6	D4	D4	D4	D4	D4	D4	7 7	D4	D4	D 2	7 7	D4	D4	D4	D4	D4	7 5	7 2		D4	D4	Beograd Centar)	D4	D4	D4	7 7	D4	D4	D4	73	D3	D3	D3	D3	D3	D3	D3	73	D3	D3	D3	D3
	Class of railway line	8	M	Z Z	M	M	M	Z	Z Z	M	Z ;	ΣZ	₹ ≥	M	M	×	M ;	Z :	ZZ			M	M	eogra	M	M	Σ	Z Z	M	M	Z	N	N	M	M	M	M	M	M	Z Z	M	M	M	M
əuil	Single/double-track	7	02 0	2 0	S	ďΩ	Ω	σ2 σ	2 02	Ω	SO CO	02 0	2 02	ſΩ	202	Ω	Ω (20 0	S S	2		S		(B)	Д	Д		A	D	Q	٥	2 03	į	ζą	Ŋ	ζζ	ζζ	ζ (i	to t	Q 02	2 (2)	ζQ i	to i	ζζ
1	Type of service poin	9	. 3	٦, ٣	,	3	7		17	-	17	n "	n -	3	3	-	ε,	- -	- -	-	9	-	_ ;	-		-	-	1 6	-	-	77	1 4	-	n	7	Ţ	Ţ	c) (7 -	7 0	+	n.	-	S
		П			0											Ī								ľ			OGRA		0.00						П									1
																											OPEN LINE JUNCTION KARLOVACKI VINOGRA																	
	oint								SNA		RSN										IA	Ш					VAC																	85
	ice p	1							4 KR		AK										PRI	Ш					3				SA													CAEDE
	Name of service point	S						4	KALJA SMEDEREVSKA JUNCTION POINT 1 MALA KRSNA		JUNCTION POINT 28 MALA KRSNA							0.00			Ņ	Ш					Ž .				Š													100
	me o	Ш	5	Z Z				DAYGE	111		T 28					LOZOVIK/SARAORCI	8	SCE			CIIO	Ш						KM 70+212 SC	-		1.6			0				1	E41		Ш			PRE
	ž	П	1	MALI POZAREVAC DRAŽANI/ŠFPŠIN		201		(dau		ΑĀ	MOIN	٥	. ∠	A		ARA	0		ASJE	¥	NO	Ш		Į,	CDS			SCE	PETROVARADIN	SC	S			ĆEV					MALI IÐOS POLJE	RAD	1	1	EVO	2020
		Ш	IVO	N N		VAC	17	I		MALA KRSNA	NO:	SKOBALJ	OSTPAONICA	Š	RCI	K/S	EVA	I/O/	OR		NE	Ą	Z	4	Z I		I NE	KM 70+212 SC	VAR	381		5 5		NOV	2		MAC	8		MATTREOGRAD)))))	,e , !	OVIC.	4 NL)
			EST	AŽA	UMČARI	VKO	DAN	KOLARI PALIA S		4LA	NCT	OBA TPA	IPAC	GAV	SARAORCI	ŽOŽ	TOS		Ž		ENI	IPRU	RAC	V CLV.	DIJA	BEŠKA	EN	170+	TRO	£ 72+	NC NC	SAILOVO	KISAČ	EPAI	ZMAJEI	VRBAS	LOVĆENAC	MALIE	MALI IÐOS	CKA 17.78	ŽEDNIK	VERUŠIC	575	EKS
		Н	O BR			5 ŽT	9 70	9 KC	2 2	8 M	74 F	S 5	0 0	7 LT			2	Ž .	5 7		0 OF	Ž Ž	0 PA	1	E C	2 BE	8 6	7 2	.0 PE	1 KO	3 70	_			_	-	,					_	0 2	2 AL
	Chainage	4	39+600 BRESTOVI	41+500	47+771	52+315 ŽIVKOVAC	55+219 VODAN	609+09	67+800 JUNCTION POINT 1 MA	890+69	70+264	71+995 SKOBAL	76+202	77+817 LUGAVČINA	81+417	82+767	87+717 MILOSEVAC	90+226 KRNJEVO/TRNOVCE	94+639 VELIKO ORASI.		0+0	0+500 ČUPRIJA	7+42	9	42+862 INDIJA	54+032	62+058	70+212	70+870	72+381 KM 72+381 SC	76+513	81+635	91+381	8+05	03+538	116+745	128+118	132+820	136+163	152+800	157+818	162+976	7+18	171+962 ALEKSANDROVO PREDGRAĐE
		Ц													000							Ш		,											10.	11	12.	4	+	_	\perp	\perp		
	Distance in km	3	2.706	1.867	4.604	4.544	2.904	5.390	1.230	1.268	1.196	2 770	1.437	1.615	3.600	1.350	4.950	2.509	4.413	3,000		0.500	6.920		7.918	11.170	8.026	4.400	0.658	1.511	4.132	3 506	9.746	6.675	5.482	13.207	11.373	4.702	3.343	8,033	5.018	5.158	4.204	4.782
transport	Left track	7		0.50	-	Н	_		-		_		1	•			-				T	-				<u>.</u>		_	_		- -	29	T	1			_	-			ш			-
handover to public	Fight track	Н	01.06.	1924.											10.12.	200										10.12	1883.				25.10.1961.	31.05.1964							05.03.	1883.				
Date of	Anent thai A	17																		1	1										7	3	1											



əbititlA	30	113.2	13.2	128		1883			100	6	207.2		219.5	235.3		265		267	0	286.9	314				341.6	368.5			416.5	T		445.8									77.0	77.1
Loading gauge			Į I-	Ţ		1		7	7 5	7 7					7 7	Ţ	Ţ	년.		+	1 7	I	Ţ	+			-			7		1,500	7		L	ŀ	F	T.	보	7 5	ŽS-I	Ţ
the line [daN]	28 29	ZS-I	S ŽS-I	ZS-I		F	ŽS-I	ŽS-I	1-82-1	-cz-	I- ŽŠ-I	ŽS-I	- ZS-I	7.5.I	7.S-1	- ŽS-I	ŽS-I	- ŽS-I	7.57	- ZS-I	- ZS-I	ŽS-I	ŻS-I	ŽS-I	- 2S-1	- 7.S.I	ŽS-I	ŽS-I	ı ŽS-I	ZS-I	\dashv	+	1-62		- ŽS-I	ŽS-I	10 ŽS-I	ŽS-I	I-SZ 8	ZS-I	1 4 Z	+
Ruling Teststance of	27 2		9	9		-		=	9	5	4		ر د	×		7		7	,	9	7	E		1	7	r			8		-	19.	71				4 1		-	+-	1 1	
Slope gradient			S	~		r	7	0) v	0		0		0	0	0	0	0	0 0	0 0	0	0	0	0	0	0	4	0	н		0	\neg	5	-	4		8		œ	٦,	1	-
Incline Ruling	25	-	9	9			2	4	0 0		ш	9	_	_	n vo					4 4		8	3	_	v 1-	_	_	9		w,		_	11		0		3		-	-	1	
Gradient of the station [%]	24	0.0	3.3			L				7,4	2,5		_	3,09		0,0		0,0		4,9	0.0			_	6.4	8.0			8,5		_	9,5		0.0							0.0)
Minimum curve radius	23		009	2000			300	200	2000	3000	1000	310	300	300	300	500	450	500	900	350	300	400	400	009	300	200	550	0	3000	700	200	500	2000		300	900		200	800			600
Open for the acceptance and dispatching of passengers/freight operations	22	H	P/F			P/F		Ь	Д	4	Ь	Ь	Д,	4	а	Ы	Ь	а 6	74 E	a, a	Д	Ь	Ъ	Ы	4	P/F	Ы	Ь	Ь	Ы	Ь	P/F		Ь	Ы	Ь	Ь	Ь	Ы	д д	P/F	P/F
Occupancy of service point		-	Q,			Д			Д	4	Ы		ם	4		Ъ		Þ	F	ч	д				4	Д			n			Д	1	Ъ		Ъ	Ъ		ы	Д	4 4	Ъ
Side-/end-loading platform	20		ζQ			D.	1 2																			S.		10-31	Ω			SÆ									2000	2 02
Freight car scales	19	Yes						S=000				4	1													1		8-9			7	Ϋ́es								1	Yes	
Service point code - UIC	18	23450	23450	23499		12551	1000	12401	12402	12402	12404	12405	12406	12407	12409	12410	12426	12411	12412	12413	12415	12416	12417	12427	12418	12420	12421	12422	12423	12424	12425	12499	17490	16052	16053	16054	16013	16016	16015	16006	22001	21001
Manner of securing the service point	17	4	4			-	1	\perp	+	-	1		00	×		00		∞	,	9	8			_	∞	9	L		9			9		-	1		1		1		4	4
Manner of traffic regulation	16	block post distance	block post distance	station distance			AB	AB	AB	AB	AB	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	- Pančevo slavna stanica - Vršsc - state border - (Stamora Moravita)	(AB with TWT	AB with TWT	AB with TWT	AB	AB	AB AB	AB	station distance
ITRUKS IOT B→A sceephance of the longest trains	15	3 and 14	and 3		(Dragoman)	3	,		۲	2	4	1	,	7		2 and 3		2 and 3	,	7	2 and 3				2 and 3	2 and 3			2 and 3		200	7	order - (3					2	7	4 and 5	2 and 3
train length Direction	[4	507 13	594 2	1		000	+		600	-	009	1	-	524		603 2	Н	614 2	-	791	713 2	H		_	624 2	624 2	-	20-00	626 2	1		711	state b	400	r				269	594		
longest trains Maximum permitted		14	3	+	horde	4	ic.	+	4	-	9	+	ď	2	+	+	\vdash	+	1	7	+	H	-	+	+	+	⊢		-	+	-	_	Tšac -	0 4	-				9	4	+	+
Direction Tracks for A→B Direction	13	13 and	2 and		d - state horder	3	7		۳	2	4		•	74		2 and 3		2 and 3	,	7	2 and 3				2 and 3	2 and 3			2 and 3			7	mica - V	8 and 10					3	٣	4 and 5	2 and 3
Maximum permitted train length	12	207	594		italic 06 Niš - Dimitrovorad	490	2		600	000	599		:	524		603		614	101	791	713			į	624	624			979			710	vna sta	364					697	673	810	471
гец ияск sbeed	11	7	SI. I	0	- Dimi											0													0				evo els	b	ç	OC.		50		09	100	0
Right track Maximum permitted	10	UV	F !	50	talıc 6 Niš	C TATE										30													50			ľ	- Panče		20	70	2			100		50
Railway line category	6	D3	D3	D3	10 10		D3	D3	57	D3	D3	D3	D3	2 2	D3	D3	D3	D3	D3	D3	D3	D3	D3	D3	D3	2 2	D3	D3	D3	D3	D3	D3	Beograd Centar	Г	D4	D4	D4	D4		_	D4	D4
Class of railway line	8	M	M	M	preser	T	M	≥ ;	Z Z	Z	×	×	Z ;	2 2	ΞZ	M	M	≥ :	Z Z	ZZ	Z	М	M	Z.	ZZ	Z	×	M	M	Z.	Z	≱ ;	Tad C		Z	M	M	×	Z.	ΣZ	2 2	M
Single/double-track line	7	ζζ	ζζ	ζ.	rks are		Ω	02 0	2 0	2 02	Ø	ď	S	ν c	2 02	w	Ω	σ c	20 0	w v	2 02	Ω	Ø	ω	on o	2 02	ß	S	Ω	20	Ω	Ω i	Beog	-	Д	D	D	D	Д	A C		S
Type of service point	9	7	Ţ	13	t of wo	-	12	m (n -	3 -	1	3	7		ი ო	2	3	- ,	ς.	- "	2 24	3	3	8	7 6	, -	8	3	1		3	- 5	107	-	1	3	7	3	2	e -		
Сhainage Name of service point	4 5	175+650 SUBOTICA TERETNA	76+474 SUBOTICA	184+582 STATE BORDER	On line sections where the works are being executed the data that were applicable before the commencement of works are presented in italic 106 N	0+241 NTŠ	0+736 JUNCTION POINT 4 NIŠ	1+766 PALILULSKA RAMPA	3+400 VOJNA BOLNICA 5+461 CFI F KITI A			14+700 PROSEK		22+509 OSTROVICA	29+500 RADOV DOL	31+700 DOLAC		36+426 CRVENA REKA	39+680 BELANOVAC	44+912 BELA PALANKA			58+800 ĐƯRĐE VO POLJE		63+817 STANICENJE 67+300 SOPOT	72+935 PIROT		81+700 VELIKI JOVANOVAC	86+193 SUKOVO	90+500 CINIGLAVCI	92+700 SRECKOVAC	97+423 DIMITROVGRAD	1037930 STALE BUNDER	0+000 BEOGRAD CENTAR	1+232 KARAĐORĐEV PARK	2+800 VUKOV SPOMENIK	4+688 PANČEVAČKI MOST	7+100 KRNJAČA MOST	8+120 KRNjAČA	9+981 SEBES 12+492 OVČA		18+206 PANČEVO VAROŠ
Distance in km	3	3.688 17	_	8.108 18	here the works		0.495	1.030	1.034	0.739	200	36,575		5.361	350 1000			00017		3.588	200	0007			3.483	0-1393							11 /000		1.232	1.568	1.888	2.412	1.020	2.511		
Right track Date of handover to public track transport	100000			05.12.1882.	n line sections w	ŀ			32.00	1		01.06	1887.	ı		.					1				F	1887.								H	V. P. NO. 1943	.20.		۶.	£61	.11.	1	11.10.1935.



	əbutitlA	30	104.0	146.0	120.0	95.4	81.7	9./8		102.3	82.0	0	105.3	1.1.1	1533		117.9		35.3	93.7	108.5	110.9	123.6		145	I	186 4	264		388.5	501	107	40/.1	411.9	352.1			2000	311.6		T			1627	100.
\ <u></u>	Loading gauge	6	I-S	ŽS-I	ŽS-I	ZS-I	ZS-I	78-1 78-1	ŽS-I	ŽS-I	ZS-I	ŀ	, ×	78.1	78.1	ŽS-I	ŽS-I	I-S	ŽS-I	ŢS-I	S-I	ZS-I	ŻS-I	ŽS-I	ŽS-I	1-87	7.S-1	ŽS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	70 I	1-07	ŽS-I	74.1	ŽŠ-I		ŽS-I	ŽS-I	ZS-I	ŽS-I	ZS-I	1-82-1 78-1	7.07.
the line [daV]	←	28 2	6 Ž	2 Ž		8 Z	Z×	7 1	Ž	Н	5 Z	ŀ	*	- 1×	0	10000	9 Ž	Ž	+	3 Ž	4 Ž	7 7	3 Ž	Ž	1 ×	7 1	7 6	Ž	Ž	Ž -	Z ×			7 01	9 × Z	H	Ž	-	8 Z×	Z	+	4 ×	7 1/2	11/2	1 1/4
Ruling resistance of	\rightarrow	27 2		10		v)	-	9	t		3	ŀ		71	9	+	,		\dashv	+	9	4	-	H	۲	t	000	17	H	16	17	_	1 1	+	,		-	-	+	+	+	8		v	. :
gradient	Slope	_	-	\vdash	10	∞	Ī	_	Ī	4	s)	t	c	+	~		8	П	4	6	4	-	7		-	t	-	0		0	+	_	-	CI	∞	,	T	8	9	T	1	0	T	c	
Ruling	Incline		-	-	4	3		n			3		Ē		9		0			4	S	۲	4		7	I	7	15		16		9	2 0		0				0			œ		4	
[0%] uc	Gradient of the static	24	1,34	3,5	5,2	6,2	0,7	1,8	0,0	2,5	3,0	ľ	20 4	C.7	100		0		0	1	1		1.7		2		2.3	1.2		2.5	2.2	•	7 (7	2	1		1	7.5						C.1
sn	Minimum curve radi	23	300	500	350	350	600	600	200	300	1905		300	300	400		400		400	450	450	500	450		500		600	300		300	300	300	300	300	500	200		100000	500					\$00	400
	Open for the accepta dispatching of passer operations	22	P/F	P/F	P/F	P	Ъ	P/F D	4	P/F		Ę	P/F	T/T D	م م	d d	P/F	P	P/F	P/F	P/F	P/F	P/F	Ъ	P/F	4 6	P/F	Ь	P	P/F	Ы	P P	D/D	T/L	4 4	Д Д	- A		P/F	f	P	P/F	ᅀ	P/F	1/1
e point	Occupancy of servic	21	T	D	Ь	H	,)	I	Ь		4	4 F	0	11		n		Þ	Ы	H	Ŀ	Þ		Þ	1	Д	n		Þ	Þ	11	۽ د	4	Ω)		3	ы			n		E	
attorm	Side-/end-loading pl	20	Ø	Ø	Ø	ď		2		S/E		Ţ	02 0	2			Ø		Ω	ď	Ω	V.	Ω.		Ø	1	V.		Ц				ō	2			L	1	ď			Ц			1,0
	Freight car scales	19		Ц		4	4		L	Yes		L	1	-	Ļ											1	L		Ц		4		1	1			╀		Yes	1	4	4	_	ļ	1
nıc	Service point code -	18	21002	21003	21004	21005	21006	21007	20017	21009	21099	,	15501	15201	15203	15204	15205	15206	15207	15250	15209	15260	15211	15212	15213	15214	15251	15101	15112	15102	15103	15104	15105	15100	15107	15116	15113	20000000	15150	1	15111	15110	15114	15108	OOTCT
the service poir	Manner of securing t	17	7	7	S	œ 1	∞ (×		7		-		7	7		1		1	-	-	+	-		-		-	1		1	-	·	٠,	1		1	L	H	-	-		-		-	1
սօդելոն	Manner of traffic reg	16	station distance	station distance				station distance	station distance		station distance	grad Centar) - Resnik - Pozega - Vrbinca - state border - (Bijelo Polje)		RC with station distance	RC with station distance	with station	RC with station distance	RC with station distance	RC with station distance		RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	BC with station distance	RC with station distance	RC with station distance	with etation	RC with station distance	74	RC with station distance	RC with station distance	RC with station distance		RC with station distance	RC with station distance	TO WILL STATION OF STATION
v. a	acceptance of the longest trains	15	and 3	3 and 4	3 and 4	and 3		2 and 3		4 and 5		oorder	.n -	+	"		3		3	4	7	4			3	I	4	7		3	3	c	0 4	٥	3	,		Зр	5f			3		۲	, ,
Direction B→A	Maximum permitted train length Tracks for	14	663 2	\vdash	3	662 2	_	7 599		643 4		a - state	730	27.2	768		574		594	706	602	652	601		602		593	520		566	544	133	700	244	549		t	349p	549f			553	+	273	500
	scceptance of the		and3	3 and 4		and3	-	2 and 3		4 and 5	- 1	Vrbmc	T	+	,	T	3			4	2	4	3		3			2		3	T		0 4	t	3	t	t	3p 3		T	Ť	3		T	, ,
Direction A→B	Tracks for		2	Н	3	662 2 a	+	065 2 a		643 4 a		Pozega -	730	-	771	L	572		4	4	11	640	L		009	-	965			999			544	1	551	1	╁	292p 3	_	+		554	+		000
	Maximum permitted	F	9	8	7.	ŏ		ŏ	L	9	4	崖	- 4	9	7		S	Ц	š	9	601	3	55		9	1	ŭ	5.		Š	ŵ	ü	ri u	ň	is.			29	9	_	_[Š		ů.	1
Maximum permitted speed	Right track Left track	Н					100				50	tar) - Kes	70			82			06		95				100								05	00								100			
		Н	2	5	7	7	71	7 0	1 21	2	7 7	- -		t 4	4	4	4	4	4	4	4	4 4	4	4	4	4 4	1 4	4	4	4	4	4 4	7 -	₇ -	4	. 4	4		4	4	4	4	4 4	1 =	+
	Railway line categor	Н		Н	+	+	+	7 D	+	Н			-	+	+	+	\vdash		\dashv	\dashv	\rightarrow	1 D4	+	Н	+	7 7	+	+	Н		-	+	7 5	+	+		+	1	-	+	+	+	D 0	+	+
Corne	Class of railway line	Н		2.3	+	$^{+}$	-	ZΣ	+	Н	Z e	108 (Beo	>	+	t	+		M	\dashv	\dashv	+	ΣΣ	+	M		Z 2	+	H	Н	\dashv	_	+	+	2 2	+	+	+	1	7	+	+	\dashv	+	≅ ≥	+
	Single/double-track l			Н	S	-	+	ν v	+		_	Ĭŀ	_	2 0	+		H	S		S			i w	Н	+	+	+	ſΩ	Н	-	+		+	2 0	-	+	+	-	Ω		+	+	+	+	2
1	Type of service poin	9	1	1	-	-	. 3	- r	9	1	13	-	-	۲ ۲	5	3	2	3	_	7	-	0 -	H	3	(2 6) -	2	3	-	7	3		7 6	,	1 (*	3 6	-	+	17	3	7	e c	ر ا	1
	Name of service point	5	07 BANATSKO NOVO SELO		54 ALBUNAR	441 BANATSKI KARLOVAC	37 NIKOLINCI	37 ULJMA OD VI AIKOVAC	97 OPEN LINE JUNCTION A ULIMA	53 VRŠAC	98+314 STATE BORDER	or normal	0+425 RESNIK	OS NENADOVAC	08 BARATEVO		23+094 VELIKI BORAK	38 LESKOVAC KOLUBARSKI			86 LAZAREVAC	46+900 KM 46+900 SC 52+600 LATKOVAC		00 MLADEVO		69+245 LUKAVAC KOLUBAKSKI	24 VALIFVO				45 SAMARI	_		ON TITRICT	42 KALENIĆI		135+800 GLUMAČ	Annual management		89 JUNCTION POINT 53 POZEGA			00 ZLAKUSA	154+200 BUNUVICKA KAMPA	1501974 DEVOING
	Chainage		34+007					70+337	100					-				1 27+738					100	8 63+900										173+400						_					
- 00	Distance in km	3	15.801	11.848	669'L	*5,207	3.996	7.300	6.497	1.056	15.461		7 7 1 7	117.7	3 503	2.192	5.194	4.644	2.889	6.635	8.124	1.514	6.382	4.918	3.254	4 467	4.437	6.846	7.030	2.448	9.097	4.533	7 670	1510	6.442	3758	2.200		4.987	1.702	3.111	3.662	2.238	2.700	11.1.7
handover to public transport	Right track Left track	H	26.08.	1896.			08.12.	1894.		Macal	20.07.1858.			2011	1958.			2011	1058		07.07.	1968.		113	29.11.	1908.										25.07	1972.								



	əbulitlA	30	418.4	520.5		100	100	784		612.5		531.5		390.3		1	44/./	453.2	4:00		505 2	561.5	553.7				109	120.5	C, 721			153,0	171,6		200,1	236,5		241,9	239	216		210,3	1000	187,7		202.4	
	Loading gauge	59	ZS-I	ŽS-I	ŽS-I	7.5-1	1-07	7.S.1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	7.5.1	70.1	1.63 I	76.1	1.5	1.82	ŽS-I	ŽS-I	ŽS-I		1	7.S-1	1.07	7.8.1	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	ŽS-I	ŻS-I	ŽS-I	ŽS-I	ŢS-I	ŻS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	78-1	-
the line [daV]	←	28						. 2	+	18		16	_	17	1	+	4	4	+	+	-		9	5 2		_	e .					4	3					12	4	6	-	5	+	∞		00	4
Ruling resistance of	\rightarrow	27	18	18		0 -	0 0	16	1			a.		0.	Ī		٥	4	.	PI.	10	6	S	8			3	y	-			10	6		8	11		12	4	3		3		·	I	00	'n
gradient	Slope	26	-	0		+	0	+	-	17		16		17		,	2	3	2 1-	/	1	0	9	5		3	2	0				3	2		0	_		10	3	8		4		7	\prod	-	-
RulinA	Indine	25	5 16	3 17	Ц		1 10	2 16	_	0		2 0		0	4		0	9			10		\perp	8		100	7	4		L		8			3 7	01 (2 12	1 3	1		2		0	4	1	,
[0%] tr	Gradient of the statio		2.5	2.3		_	1.3			2.5	8-9					- 1	1.3	1.5			1.5			Ш			2.4	3.3		L		7.	2.0		4.3	500		4.2	2.4	2.0		4.5		1.8		1.0	
sn	operations Minimum curve radiu	23	400	350		400	400	400	2	300		300		300		000	one	350	400	400	350	400	400				250	250	000			550	550		300	300		300	375	300		300		300		290	
nce and gers/freight	Open for the acceptar dispatching of passen	22	Ъ	Ъ	Ы	7 E	P/F	T/1	, 2	Ь		Ь	д	P/F	الم	A 6	F/F	4 0	т Д/Д	P/F	4 0	Д	д			Ы	P/F	4 0	4 4	д	Ь	Ь	P/F	Ы	P/F	Ъ	Ь	P/F	Ъ	P/F	Ь	P/F	Д	P/F	<u>е</u>	P/F	414
taioq e	Occupancy of service	21	Ь	n		Ė) t			Þ		n		Д		1	0	F	1 0	4	П	Þ	Ы			Ы	4	I				D	Д		Ь	D		Ъ	n	Ы		D		Д	4	ρ.	_
nriolit	Side-/end-loading pla	\vdash							L					Ω	\downarrow			L	V	2						1	Σ.			L			ß		Ø	Ω		Ø	Ø	ď		Ω	Ц	Ω	Ц	c/s	2
	Freight car scales	19			Н		-		-					4	4	1		1	1				H				4		-	L														4	4		_
nıc	Service point code - 1	18	15153	15701	15716	15/1/	15702	15704	15705	15706	15721	15707	15720	15708	15722	157.09	15719	15711	15717	15710	15713	15714	15715	15723		13450	13201	13202	13204	13205	13206	13207	13250	13209	13210	13211	13212	13213	13214	13215	13221	13216	13217	13218	13219	13220	
he service point	Manner of securing t	17	Т	1	Ц	-	-		1	T		-		П	1	,	-	-	1	_	-	Н	-				∞	C	•	L		8	9	2 6	8	8		8	8	-		8	\perp	∞	1	4	
ព០ដិនបែ	Manner of traffic reg	16	RC with station distance	RC with station distance	RC with station distance	RC with station distance	NC With station distance	RC with station distance	RC with station distance	RC with station distance	RC with station distance	with station	RC with station distance	RC with station distance	RC with station distance	KC with station distance	station	RC with station distance	BC with station distance	NC with station distance	RC with station distance	RC with station distance	RC with station distance	station distance	olje - Deneral Janković - state border - (Volkovo)		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	Shutta Val. Services ov.
	acceptance of the longest trains	15		1	dieta d		T	0 60		2		1	Syles	4			2	,				100-2			ć - state	5 and 6	7	,	,	T		3	3		2	2		2	2	3		2	T	7	T	4	
Direction B→A	train length Tracks for	L		200	H					-		_	-		+	-		Į.		-				Н	nkovi		+		+	╀						_						-	_	+	+	+	H
1	Maximum permitted	14	346	547		200	406	531		536		572		553		3	349	307	100	499	552	969	544		eral Ja	563	099	733	77,			734	844		558	632		614	620	999		597		746	Ц	738	
a←A	Tracks for acceptance of the longest trains	13	1	1		c	0 6	0 0	,	2		1		4		·	o	۳	, v	o	3	н	3		ilje - Đen	2 and 3	7	۲	0			3	3		2	2		2	2	3	8	2		2		4	0.00
Direction	Maximum permitted train length		353	545		003	339	531	122	550		574		551		3	100	307	105	493	553	738	547		Kosovo Pc	530	099	722	77/			734	844		558	632		614	620	591		597		746		738	100
permitted speed	Left track				50			70		5	90					30						20			- Lešak - Ko	65				100			01							Q.	7						
mumixsM	Right track	10				_	_		L						_	_	_			_	_	_			0		1	_	_															_	_	_	
A	Railway line category	6	D4	D4	D4	D4	7 5	100	D4	D4	D4	D4	D4	D4	D4	D4	7 5	7 5	2 5	7 5	7 5	D4	D4	D4	raljev	1	8	3 8	3 8	ប	C	C3	ව	ប	\mathbb{C}_3	ម	င္သ	C3	\mathfrak{S}	ម	C3	ຍ			<u>ව</u> දි	3 8	ì
1	Class of railway line	æ	M	M	M ;	Z Z	Z Z	₹ ≥	Z	×	M	M	Z	Z	∑	≅ ;	Z Z	≅ ≥	1 >	2 2	₹ ≥	M	M	M	VO - F	II,	Z Z	Z	≅ ≥	Z	M	M	M	×	M	M	M	M	M	×	M	M	×	⊠.	Z ?	ΣZ	414
əui	Single/double-track l	۲	S	ß	20	20 0	Q U	2 02	2 V2	Ø	Ø	Ø	Ø	Ø	Ω	20	2 0	2 0	2 0	20	2 0	S	Ø	S	Lapovo -	-	SO C	2 0	2 00	ω	Ø	Ø	Ø	S	Ø	Ø	S	ß	Ø	ď	S	Ω	Ø	Ω.	s s	N N	2
1	Type of service point	9	1	2	3	<i>o</i> (7 -	-	3	2	3	2	3	-	6	ς,	7 6	n -	-	٦ ،	2 5	2	-	13	109	1	н с	ი -	٦ ,	3	3	1	1	3	1	1	3	1	1	-	3	1	8	-	0 0	n -	
	Chainage Name of service point		163+881 UŽICE	170+644 STAPARI			1/8+330 SUSICA	193+320 ZLATIBOR		205+407 JABLANICA	211+600 GOLEŠ		219+500 RAČA	225+290 PRIBOJ	228+300 POLJICE	232+800 PKIBOJSKA BANJA		2401300 DZUKOVO 2524616 PRITEPOLÍF	255+856 PRITEPOLIF TERETINA	233+830 PKU EPOLJE LEKETNA 350+600 VET IK A ŽIDA	_	273+329 BRODAREVO		287+438 STATE BORDER		0+666 LAPOVO	3+405 BATOCINA	5+300 GKADAC 12+284 BADNIE37AC	15+800 RESNIK KRAGITEVAČKI			22+335 JOVANOVAC	_	31+300 ZAVOD	34+100 GROŠNICA	39+551 DRAGOBRAĆA	44+600 VUČKOVICA	47+586 KNIĆ	53+474 GRUŽA	60+598 GUBEREVAC	62+100 TOMIĆA BRDO	66+335 VITKOVAC	70+081 MILAVČIĆI	_	79+100 SUMARICE	81+900 SIRCA 84+744 KRALiEVO	11 11 11 11 11 11 11 11 11 11 11 11 11
	Distance in km	3	1.981	6.763			0007			30 8	6.193	6	5 3			-	_	5.022			5.041			2.245			2.739	3.084	3.516	2.651	2.149	1.735	6.494	2.471	2.800	5.451	5.049	2.986	5.888	7.124	1.502	4.235	3.746	3.854	5.165	2.844	
Date of handover to public transport	Right frack Left frack						21.05	1976.	5	1						1		21.05	1976	19/0.			1				1	7,647,546	03.03.	1887.	1	1			1					22.12.	1929.						



	əbutitlA	30		271,4	122 4	262.7	304,2	3.43.1	1,01	379,8	303	2	406,3		416,5	T	Ī	141	Ť	454	I		470	491	495	496.6	497		93,7	85,1	85,3	, , ,	0,08	88.2	80.8	9,611	118,3	124,6	124,7	124,5	119.3	113,2
	Loading gauge			1	1-87			ŽS-I	+		ZS-I	1.5	ŻS-I	3-I		ZS-I	7 7	1-87	ŽS-I	ŽS-I	I-9	I.	ZS-I	ŽS-I	Н		1-82 ZS-I		8-4	ŽS-I	ŽS-I	1-S7	7.S-1	7.S-I	ŽS-I	ŽS-I	ŽS-I	. I-8		1		Н
the line [daV]	← ←	28 2	Ž	- ZS-I	7 1	+	Ž 6	Ž,	1 1/1	, Ž	Ž,	1	S Ž	ZS-]	9 2 9	× 7.	-S2-	7.5.1	1 - 1	4 Ž	Ž	+	4 ZS-1	3 2	Ţ,	5 ŽS-1	¥ 1,44		-	S Z	ž Ž	7 10	1 5	╁	╀	Ž	5 Ž	ŽS-]	4 X ×	ZS-	1 /1	6 Ž
Ruling resistance of	\rightarrow	27 2	١,	9	4	+	Н	0	-	- 00	S	,	5	=	9	#		~		8	=>	+	80	1	5	4			So.		-	,	0 (+	9	-		4			3
gradient	Slope		\vdash	0	,	- 4	-	c	+	Н	0	>	1		6	#	t	-		2	T	1	П	-	3	0		11		'n	-	,	4 6		٠	-	S	H	4	,,	+	9
Ruling	ənibal	2.5		S	v	1 2 2		V		7	4 <		4		4	1	I	v		9		_	S	v		8			10. 171		-	_	0 (_					4	"		3
[%] uo	Gradient of the statio	24		0.4	0			t		4.1	2.2	┸	0.4		4.8			0.0	_	0.0		4	0.0	2.0		0.0			55-54		0.2	_	0.0					Ш	2.5	2.5	à	1.0
sni	Minimum curve radi	23		300	300	300	250	300	300	270	300	200	300		300	300		300	200	300			300	300	300	300	300			3000	2000	9000	1900	1090	900	3000	3000	1900				610
	Open for the accepta dispatching of passer operations	22	1	P/F	4 6	ч	Ь	P D/E	I d	P/F	P/F	Ь	P/F	Ь	P/F	٥	۲ اد	P/F	P	P/F	Ь	Ь	P/F	P/F	P/F	P/F	Ь			P/F	Ь	Ę	P/F	P/F	Ъ	Ь	P/F		P/F	P/F	1/1	P/F
tnioq ə	Occupancy of servic	21		Ы	F	ı D	þ	٥	4	Ъ	ΗР	4	Ъ		Þ			ρ		Ъ			д	Þ	Þ	д	Ω			Ы	n	F	٦ ۵	_	-	Þ	Ь		D	ρ	4	Ы
пподв	Side-/end-loading pl	20		cΩ				ŭ	2	Ø			ďΩ		σ					ß			Ω	σ ₂	Ω	σ				ď				S/E								S/E
	Freight car scales	19		1			L			Ш	1					1	1					1			Ц							1		Yes	1	L				1	Ļ	Ц
oiu	Service point code -	18		12101	12102	12104	12105	12116	12115	12107	12108	12110	12111	12112	12113	10117	12117	12001	12002	12003	12021	12004	12005	12006	12007	12008	12022		25471	25470	25501	00000	25502	25550	24401	24403	24404	24405	24406	24407	24409	23450
the service point	Manner of securing I	17		∞	4	1 4	3	c	1	œ	e a	•	5		∞		I		-	1			1	-	-	9	10		8-8	-	5	,	ט ער	4	5	S	5		S	v	,	4
noñslug	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance			station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the longest trains	15		3	·	1 7	2	,	4	3	1 0	1	2		2	†	t	c	a	3		9	3	3	П	_	-	dut)		3 and 4	2 and 3		2 and 3	3 and 4	2 and 3	and 3	3 and 4		2 and 3	and 3	dille	2 and 3
Direction B→A	Luscks for Tracks for	4		631	7.77	630	859	705	+	644	1005	0	212		889	+	+	473	2	579		+	576	539	545	640	140	der - (F	\neg	732 3		1	623 2	1		1 21	3	Н	617 2	733 2	1	594 2
	longest trains Maximum permitted		- 1	9	r	- 9	9	4)	9	= "	,	9		9	+	+	7	1	Н		+	s.	ς,	s.	9	Ŧ	tate bo		-	-	+	+	+	╀	+		Н		+	+	-
Direction A→B	Tracks for	13		3	ŗ	7 7	2	·		3	1 ,	4	2		2	1	1	Ç	1	2 and 3		_	e.	3	1	-	-	ojevo - s	\dashv	+	2 and 3	+	2 and 3	+-	2 and 3	2 and 3	3 and 4	Ц	2 and 3	2 and 3	1	2 and 3
7274-117-14	Maximum permitted train length	12		631	101	630	859	785	000	644	1005	ò	657	,—	638			470	Ť	619			287	540	551	630	137	- Bog		730	513	007	460	505	524	522	525		617	716	1	594
sbeeq - bermitted	Left track	11					40 (50)						(00)	(00) 05								20					10	110 Subotica - Bogojevo - state border - (Erdut	30 (40)	(6.)						(0.5)	40 (50)					
mumixsM	Right track	10	_	_			4				1		,	<u>م</u>	_	4	_		_			_		_				110	3(,		_			_	_	₹		_	_	_	
λ.	Railway line categor	6	\mathfrak{S}	g 8	3 8	3 8	පි	8	3 8	បូ	පි ද	3 8	੪	ឡ	ප	3 3	3 8	3 8	D3	D3	D3	D3	D3	2 2	D3	20	23 D3			ව	D3	25	3 5	D3	D3	D3	D3	D3	D3	2 2	D3	D3
i	Class of railway line	8	M	Z :	ΣΣ	Z	×	ΣZ	Z	×	Z	Σ	Z	×	Σ	Z Z	2 2	2 2	Z	M	M	Z	ZZ	į z	Ħ	≱ ;	Z Z			Z	≅ :	Z 2	≅ ≥	Σ	Z	Z	M	M	Z,	Z Z	Z	M
line	Single/double-track	7	ď	Ω C	ν o	2 02	Ø	S O	2 02	Ω	02 0	2 02	S	Ω	S	so o	2 0	20	2 02	Ø	ß	Ω	so o	2 02	Ø	ςΩ (Ω			ß	02 0	Ω	2 0	v.	02	S	ß	ß	SO S	SZ SZ	2 02	ſΩ
p	Type of service poin	9	12	П,	5 -	7	1	3	3	-	∞ -	3	1	3	1	13	ى د	S -	3	1	3	3	- 6	, -	8	- 5	71		13	-	- '	۰ -	-	-	-	-	1	3	- '	- 3	3	1
	Chainage Name of service point	4 5		93+913 MATARUSKA BANjA	9/+400 PROGORELICA	100+899 BOGOLOVACKA BANJA 108+861 DOBRE STRANE		123+600 PUSTO POLJE 1274-303 ITŠĆE			138+313 PISKANJA 143+443 RDVFNIK	147+600 RVATI	152+310 RAŠKA	L57+700 KAZNOVIĆI	161+988 RUDNICA	_	165+600 DONJE JAKINJE	108+924 JEKINA 172+300 T FŠAK		182+800 LEPOSAVIĆ	88+000 PRIDVORICA		192+300 IBARSKA SLATINA	202+000 BANISKA	208+200 VALAČ	210+900 ZVEČAN	213+26/ JUNCTION POINT 0+120 KOSOVSKA MITROVICA SEVER		41+076 STATE BORDER	43+815 BOGOJEVO	50+067 SONTA	50-608 OPEN LINE JUNCTION SONIA	58-1030 FRIGKE VICA 66-1080 BITKOVAČKI SALAŠI					111+845 SKENDEREVO	115+374 TAVANKUT	118+557 LjUTOVO 123+761 ŠFBRŠTĆ		134+538 SUBOTICA
	Distance in km	3			3.48/		Ļ	3,603			2.190 1							3.376					3.800 1			_	*0.120				6.252		7.444							3.183 1		
Date of handover to public transport	Right track Left track			24.05.	1931.		1031	1531.	1	07.08.	1931.		L	13.03	1931.	Sp. variable scores.	1			ı		12.02.	1931.							1	20.11.	1870.	ı			<u></u>		<u>-</u>	1869.			



ns steers/freight steers/freight steers and	Manner of securing the service point code. Freight car scales Greupen for the acceptal dispatching of service operations Minimum curve radius of passer acceptance of the stations Aradient of the station of the station of the stations Aradient of the station of the station operations Altitude Altitude	18 19 20 21 22 23 24 25 26 27 28 29	1 16:001	S	16203 S P F 0.0 5 5 5 5	P P/F 300	1 16201 Yes P F	16202 S		1 16201 P F P F	ņ	1 U S00 9 7 10 8 ŽS-I	1 15501 S P P/F 350 1 9 1 11 ZS-I	•	1 10202 S F F 600 2 3 4 7S-I		1 16201 Yes P F Ann 70 K 1 K 1 %-1	5.6 2 1 4 1		1 1 16103 P P 300 7 5 7 5 25-1		1 16021 P F An 3 K A K Ze.r	8 0		1 16301 Voc D E	4		1 0 00 0.0 0 2 - 2 ŽS-I	Open line junction G)	16053 P	1 180 2 4 - 25:1	5.5	1 16505 D D/F 3-000 0.01/11/10/2/12/8/2 75-1 101 K	2000 0.0 [7.1] 770 [2.14] 072 [2.5-1	1 6871 Nes P F 400 3 1 3 5 5-1	23301 P 700 4.5 3 2 3 3	0010ca) 1
noñslu	Manner of traffic reg	35	Batajnica	station distance	station distance	station distance	nca	station distance	in the second second	"B" - Open line junction "K/K1" - Resm 789 6 and 7	station distance	station distance	station distance	on "K/K1")	station distance	Ē		station distance	[7]	station distance	- Rakovica	atation distance	station distance		(Rakovica)		") - turnout "K" - turnout "K1" - (Jajinci	station distance	junction Dedinje - (A.D	AB WITH I W.I		AB	on Sajlovo	station distance	block post distance	- junction point 28 - (Osipaonica) RC with AB 1
Direction B→A	longest trains acceptance of the Tracks for Train length			- 2	+	862 4		750 2	1000	789 6 and 7	_		730 3	Open line junctio	845 2,3 and 4	"R" - Open line			- Open line junctionN "R	702. 5	line junction "T"	789 8 and 9	702 5	1 1	- Open line junction 'T'' -		line junction "B")		7 park - Open line		nci	566 3 and 4	740 4 and 5	Open line juncti	798 1 and 2		- junction point 1 - jun
Direction A←A	Maximum permitted Tracks for acceptance of the longest trains	12 13	rad MARSHALLING YARD "A" - Ostruzmea -		733 3	— E	SHALLING IA	750 2	302, 300 and track loco Makiš 2 is 2914m	oen ime junction			730 3	ਰ⊢	845 3 and 4	Open line innetion			ing yard "B") - Open l	702 4	"A" - Open		702 4				a of the Open line junction "K/K1": (Open		ction Karadordev		21 Indija - Golubi	644 1 and 2	655 2 and 3	Sad - Novi Sad marshalling yard - Open line junction Sajlovo	798 1 and 2		Krsna: (Koları) - junc
Maximum permitted	Left track	10 11	grad MAKSHA		8		2 Deuglau MAR	50	and track loco	marshalling yard "A" - Open une junction	09		20	žnica - Open lin	30	ne vard "B" -			marshall	30	d marshall	30	20		mai	30	Open line junctio	700) - Open line junction	50 50		08 08	8	Sad - Novi Sad 1	O.		10n Mala 100
	Single/double-track I Class of railway line Railway line categor	- S	111 Beogr	S M D4	M	M					S M D4	S M D4	S M D4	114 Ostru	S M D4			Z	116 (Beograd	N M	117 B	\vdash			118 Beograd			S M D4	ančevački most)	2	M		D M D3	122 Novi	ν Μ	Z	on track of the stat
1	Type of service poin	9	-	1 1	1	-		1	1 A via junction	11.5 Beograd	9	9	1		1 0	115 Beograd	1 9	9		9 -		1 4	1 0	6	+	9	119 Connecting track at the ar	9	120 (Open line junction Pančev	-	0	1	14		12	4	123 Deviation trac
	Name of service point	s	04000 BEOGE AD MARSHALLING VARD A	3+300 OSTRUŽNICA	14+500 SURČIN	BATAINICA	BEOGRAD MARSHALLING YARD B	5+902 OSTRUŽNICA	Distance between Belgrade Marshalling Yard B and Belgrade Marshalling Yard A via junction points	0+000 BEOGRAD MARSHALLING VARD A	2+776 OPEN LINE JUNCTION B	OPEN LINE JUNCTION K	10+419 RESNIK	A SAN SAN SAN SAN SAN SAN SAN SAN SAN SA	2+121 OPEN LINE JUNCTION B		1+772 BEOGRAD MARSHALLING YARD B	6+309 OPEN LINE JUNCTION A		4+895 OPEN LINE JUNCTION R 5+798 RAKOVICA	***************************************	5+250 BEOGRAD MARSHALLING YARD A	5+612 RAKOVICA	Distance between the open line junction T and Ostružnica station is 5604 m	11774 DEOCE AD MADSHALL NG VADO D	24483 OPEN LINE JUNCTION T	119 Con	9+335 OPEN LINE JUNCTION KI		0+000 KARAĐORĐEV PARK	DEDINJE	0+896 INÐIJA	1+949 INDIA TT 4+708 GOTTBINGT	COLOBRACI	0+000 JUNCTION POINT 6 NOVI SAD 1+850 NOVI SAD MARSHATI ING YARD	3+689 SAILOVO	0+000 JUNCTION POINT 1 MALA KRSNA 2+314 JUNCTION POINT 28 MALA KRSNA
	Distance in km Chainage		00000	3.300 3+300			000+0	5.902 5+902	Belgrade Marsh	000+0	2.776 2+776		1.562 10+419		2.121 2+121		3 123 4+805			0 903 5+798			*3,129 5+612	the open line jun	APP.T.	0.709 2+483	CEGLO	0.463			1.491		*1,949 1+949		0+000		2.314 0+000
Date of public transport	Right track Left track Disfance in km	7			1967. 111.	11.	02.08.	1970. 5.	Distance between	02.08		28.05. 6.	1967. 1.		1967. 2.	ł		1970.		20.10.	ł		1970. *3,	Distance between	03 03	1970. 0.	30.00					-	1883. *1,	Y	09.12.	1	2.



	əbutitlA	30	102.6		105.5	Τ	Γ	П		188,8	187,7						T	113.2	110,4		107.7	102.3	200.7	85.7	7.7	77	77	80	82	105	70	78,0	80,0	81,0	81,0	81,3	78.0	77.6		80,8	80,8	2,77	0,00
	Loading gauge	6;	14	L	ŽS-I	F	ŽS-I	I-S	1-62		I-SZ		ŽS-I		ŽS-I		H		ŽS-I	ŽS-I	70. I	ZS-1	ŽS-I	ŽS-I	ŽC.I	5	I-S	ŽS-I	I-S	ŽS-I	ŽS-I	ŽS-I	I-S	ŽS-I	ŽS-I	ZS-I	1-87 Že.1	ŽS-I	I-S	ŽS-I	ŽS-I	ZS-I	1-0
[Mab] anil adt	· · ·	28 2	-	- Ž	- Ž	H	Ž 9	-	0	\vdash	7 Z	\vdash	7 Ž	1	Ž 9			N X	5 Z	+	3 × Z	4 2 × 2	Н	S Ž	׾.	١	2 Ž	1 Z ×	+	Z A	3 2		- Ž	Ž	+	4 r	7 ×	7 7	Ž	Ž	+	× 7	4
Ruling resistance of	\rightarrow	27 2	F	2	4	F	3	\vdash	-	-	0	-	7	F	2		ł		1	Ħ	1	2	Н	4	F	F	1	7 -	1 -		4	3	4		S	+	0	S		H	7		2
gradient	Slope	26		0	0		4	-	0		r-		S		Ŋ		ĺ		S		3	4	4	'n			2		-	0	3	4	0		7	7 .	4	7			-	7 6	0
Ruling	Incline	25	L	1	3	L	n	0	0		0	L	S	L	ď				1		1	2		4		2 10	1	7 -		0			4	0			2	5	\perp			0 4	
[0%] u	Gradient of the statio	24	L	3.0	0.0	L				ш	4.0	Ш						1.0	0.0		1.8	1.8			0		0.0	0.0	┸		10000		0.0	0.0			0.0			0.0		2.0	
sn	Minimum curve radio	23		500	500		300	1000	420		605		400		293				300		3600	nnoc	1500	3600		350	009	300	1000	1000	400	300	300	500	650	400	300	500		1000	500	550	405
	Open for the acceptar dispatching of passer operations	22	Ы	F	Ъ	D/F	P/F	ŕ	ъ,	P/F	P/F	P/F						P/F		1	P/F	P/F	P/F		D/F	1/1	Ь	P/F	P/F	P/F	Ь	P/F	Ъ		P/F	P/F	P/F	P/F			P/F	P/F	LIL
faioq a	Occupancy of service	21	Д	Ь	Ь	ρ	Ъ	ſ	4	Ъ	Ъ	Ь					L	Ы	U		Ч	Ω	д		ρ	ņ	n	þ	о <u>а</u>	ņ	n	Ь	Ь		H	<u>ы</u>	4	д			H	H F	-
шоди	Side-/end-loading pl			Ø		Ø				Ø	70	S/E		L				S/E	Ш	Ц			Ц		V.			σ ₂ σ	2 02	ν v	S	Ø			100	Ω	7/0	S		Ш	ω	Ω ū	2
	Freight car scales	19	_	Yes	Ц	L	Yes		4	\Box	Yes	Н					ŀ		\perp	4	1				Vac		Ц			Ļ	L	L	Н		4	Yes	4	+	Ш	Ц	4	+	4
nıc	Service point code -	18	13405	13407	13450	12516	12601	10001	17201	12550	12601	12551		180				23450	23706		23704	23702	23701	23199	22001	10077	22002	22003	22005	22006	22201	22202	22203		22204	22501	00077	22503			22504	22505	77700
he service point	Manner of securing t	17	-	4	1	-	1	П,	-	1	_	-	1	(a)	1			1	1		-	+	1		4	4	8	∞ ∘	۰ -	. 8	8	7	10	10	∞	4 (1	1		П	00	∞ 1	,
notislu	Mुशागलः 01 प्रश्नप्ताट प्रहष्टि	10 11 12 13 14 15 16	га- гароло	station distance	station distance		AB	AB	AB	del not	AB trd)	7	AB	station Niš. (Crveni krst) - junction point 2 - junction point 4 - (Cele kula)	AB			the state of the s	station distance	station distance	station distance	station distance	station distance	station distance	- (Jimbolia)	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	Station tristance
	acceptance of the longest trains	5	mg ya	9 and 10	5	rovo	6	Ħ.		_	- (Niš marshalling vard)	_	П	Ĭ.	П		zke)	nd 3	1 and 2	Ī	3 and 4	2 and 3	3 and 4		A and 5 835 4 and 5		and 3	2 and 3	and 4	and 3	2 and 3	and 3	and 2		2 and 3	2 and 3	7 and 3	and 3	П	П	2 and 3	2 and 3	Cnl
Direction B→A	Ттаски for	1 1			_	Tedur	_		vard	Ц	rshall		_	oint 2			(Rös:	2 and 3	1 aı		3 a	2 a	3 aı	1040	state bord	7	2 aı	2 a	3 8	2 a	2 a	2 a	1 a		2 au	2 a	B 7	2 a	Ш	Ц	2 au		_
	Maximum permitted train length	14	0 119	836	563	rd - N	885	5	- Niš marshalling vard	662	885 Tiš ma	488		tion p		S	rder -	594	238		643	706	618	all of	3 da - 8	3	249	473	554	534	617	665	253		524	633	282	629			647	519	3/0
	longest trains	apor		9 19		ng ya			narsh	П	- to	Н	7	Jund	T	LINE	ite boi	_	d 2		4	43	44	-	Y K	3	d3	63	4 4	d3	d3	d3	d2	П	d3	63	2 2	43	П	П	d3	d3	2
AضB	дьяска тог Драска тог	13	SOI	7 and 8	5	rshalli	0 00		Nišn	3	8 8	3		krst)		NAL	š - sta	2 and 3	1 and 2		3 and 4	2 and 3	3 and 4		amin - Ki		2 and	2 and 3	3 and 4	2 and 3	2 and 3	2 and 3	1 and		2 and 3	2 and 3	2 and 3	2 and 3			2 and 3	2 and 3	7 all
Direction	Maximum permitted train length	12 0000	0,000	849	664	Niš marshalling yard - Međurovo	733	00.	Crveni krst -		Niš - Open line junction most	490		Crveni		REGIONAL LINES	201 Subotica - Horgoš - state border - (Röszke)	594	238		654	229	626	1	2.45	ŝ	409	473	554	534	617	665	253		524	633	282	629			$\overline{}$	519	٦.
sbeed sbeed	Left track	111	TION FA	10		25 Trupale		25	126 Crve	30	Deen lin	2	2	on Niš:	30		ubotica	50	100	20		120		1	Giavna stanica	50				50 (70)				30 (40)	(08) 09		30	*	30	<u></u>	30		
mumixsM	Right track			10		125.					- ×i.			e stati			201						3	5	CHavin					50				30	09		19					1 2 3	
Á	Railway line categor	9 1		D4	D4		D4	D4	D4		D4		D4	track of the	D4			5	D4	D4	D4	D4	D4	D4	Pancevo	D2	D2	D2	₹ ₹	. A	Ą	D2	D2	A	Ą	B2	79	B2	B2	B2	B2	B2	Ç
	Class of railway line	∞ -	,	M	M	Ī	M		M		×	Г			M		Ī	۴	4 24	R	× c	4 2	ĸ	10		K	Ж	24 0	4 24	4	2	ĸ	В	Я	씸	24 6	۲ p	4 24	24	ĸ	2	24 0	4
əui	Single/double-track l	7	77	D	D	ſ	S	02 0	Ω	1	ω		S.	128 Connecting	S		Ī	G	2 02	S	ω o	2 02	S	S	707	Ø	S	S O	2 02	Ω v2	S	S	S	S	S	S C	20	2 (2	S	S	S I	co co	2
1	Type of service point	9	7	1	1	-	1	9 ,	4	1	-	1	9	Com	12		Ī	- 0	ν ∞	6	1	2		13	-	9	-	1	1	-	1	1	2	9	-	٦,	٦,		12	6	П,		Ţ
	e point			ARD				T					210	128					ŠTA																								
	Name of service point	5	0+000 LAPOVO VAROŠ	2+100 LAPOVO MARSHALLING YARD	LAPOVO	235+243 TPITPALE	NIŠ MARSHALLING YARD	239+280 OPEN LINE JUNCTION MOST	MEDUROVO	0+099 CRVENI KRST	NIS MARSHALLING YARD	244+632 NIŠ	OPEN LINE JUNCTION MOS	HINCHION POINT 3 NIŠ	0+572 JUNCTION POINT 4 NIŠ			0+000 SUBOTICA	2+481 SUBOTICA JAVNA SKLADIŠTA	3+848 KM 3+848 SC	PALIC	11+/3/ HAJDUNOVO 15+419 BAČKI VINOGRADI	24+018 HORGOŠ	STATE BORDER	16+196 DANČENO CHANNA	17+659 OPEN LINE JUNCTION 2a	JABUKA	26+799 KAČAREVO	DEBELIAČA	KOVAČICA	UZDIN	TOMAŠEVAC	ORLOVAT STOP	OPEN LINE JUNCTION 1a	LUKIĆEVO	ZRENJANIN FABRIKA	ZKENJANIN ZDENIANIN TERETAIA	ELEMIR	JUNCTION POINT 1R	KM 102+000 SC	105+815 MELENCI	KUMANE NOM BEÄET	NOVI DECE
	Chainage	4	000+0			235+243		3 239+280	8 241+208					000+0					00 000	2000	7+656			27+897	16+106				41+325	45+835	56+271	61+939	64+045	64+760	75+595	84+398	807-103	97+475	99+030	102+000		112+702	171+074
	Distance in km	3		2.100	1.688		2.934	1.103	1.98		3.134		3.000		0.572				0.668	1.367	3.808	3.662	8.599	3.879		1.463	4.67	4.465	7.46	4.510	10.436	5.668	2.106	0.715	10.835	8.803	4.397	7.772	1.55.	2.970	3.815	6.887	0.74.
public transport	Left track	2						7	1	2	1	_	\lceil	v			ſ			1.	9.					-			9	4 .	4.						688				7.	3.	-
Date of handover to	Right track	1	.54	76 I Z	i † I			1942.		1942		10.47	171	01.06	1887.					16.11.	1870.									09.04.	1884.						04.05.1889				08.07.	1883.	
, d		டட												ᆚ		ш	Ц																			\perp	┸						_



	sbutitlA	30	80,4	79,3	78,9	0,08	O, O		Π			79.3	80,4		82,0	85,5	3,	82,5	82,5	83,1	83,6	03,9	106,6	108,4	100,0	113,2		77		82,6		81.3	84.9	8,48	85,6	85,9	85,7	84,4	85	85,4		
		H	ŽS-I			ZS-I	7c.1	1-6		ŽS-I	S-I		Žs-I	ŽS-I	ŽS-I	ŽS-I	Į-SŽ	ŽS-I	ŽS-I	ŢS-I	7.S-I	-			7c.1			ŽS-I		ŽS-I	7.5.1	7.S-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I
[Vab] enil edt	→ —	28 2	3 Ž	2 Ž:	+	9 -	1 7	1		Ž	Ž,	H	4 Ž	Н	4 Z	. Y	┿	13 Ž	1 Ž	13 Ž	X X	- Ž	Ž	-	7 7	+		1 Ž		Ž	. 7 %	3 7	╀	+	3 Ž	Ž	- Ž	2 Ž	1 Ž	- Ž	Ž	2 Z
Ruling Tesistance of	\rightarrow	27	2	1	1	4 -	,		18		3	F	7	П	9	7 4	,	10	1	10		7		7 0	2 6	1 9	1	-	1	H,	2	-	S	S	7	Г	1	-	3	3		3
1998	Slope	26	2	2	+	9 -					0	H	3	H	+	0 4	+	10	_	10	t	0	Н	7 0	7 0	+	1 1	-	1	H	5	.3	3	+	0	H	0	7	0		П	2
Ruling tradient	-000 0000000	25 2			\dashv	1	1 0				7	-	1910	Н	\dashv	2 4	-	10 1	10.0	10		1	Н		2 6		1		1	Н	2			4	1000			2076		150,710	H	2
1000 000	Incline	7	0	0	0	0 0	_	4			-	-	0	0						1	+	0	Н		-		JL	2 2			-	0	0	_	0	0	0	0 1	0	0	H	
[0%] uc	Gradient of the statio	24	0.0			0.0				S 0		0.0	200	Ц		0.0			0	0	-	0 3.0	0	0 3.2		0 1.0	JL	0.45		0.0	36	0.0			0.0			0.0		0 2.0		
sn	Minimum curve radi	23	500	480	475	500	190					-	400		200	200	300		300	30	400	1000	1000	1000	3000	500		- 200 - T		400		10	300	400	450	006		300	300	300		
		22	Ъ	P/F		P/F	4					P/F	Ь		P/F	ЪД	1		P/F					P/F		P/F		P/F		Ъ		P/F	P/F	ы	P/F	Ъ	P/F	Ъ	Ь	P/F		P/F
121	Occupancy of service	17	n	T	+	A F	1	=	8	Ω	=		n	H	Ц	Þ	+	H	Ъ		+	Ħ	H	n	t	Ъ	ł	a D	1	Ъ	4	F	- 4	n	H	F	Ъ	Ъ	U	Ъ		Ъ
	TOTAL TOTAL	-	H	\dashv	\dashv	+	+			1	-	-	-	Н	\dashv	+	+	+				H	Н	7	+	_	1 1	-	1	\vdash	+	100	+	-			\vdash	-			Н	
птода	Side-/end-loading pl	20	Ц	Ω	4	ζΩ Ω	2					S	ι Ω	Ш	S	co o	²	Ш	Ø	Ц	4	L	Ц	Щ	1	S/E	1	Ω	1	E		02	S	S	Ω		Ø		S	Ø	Ш	Ω
	Freight car scales	19		_	2000		1	FIC				L		-)	_		-		-			_			1	_						-			7079	2000				_	_	
DIC	Servi ce point code -	18	22508	22509	22801	22850	23800	TRAF		16104		22509	22601	22602	22603	22604	7777		23801		23802	23803	23804	23805	23800	23450		21001		16808	73301	24003	24004	24005	24001	25001	25002	25003	25401	25402	25403	25470
he service point	Manner of securing t	17	8	7		4 0	7	FOR		3	-	~	10		6	10		-	Т	1	v.			4	1	4				Η,	-	∞	4	10	7		4	7	10	Т		Н
ព០ដិនប្រ	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	U.S. Sation Usative 1,2609	ovica)	station distance	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	_	station distance			AB	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the longest trains	5	and 3	2 and 3		1 and 2	call	ački m	- (Rak	2	١,	and 3	2 and 3		2 and 3	2 3 and 4		T	2 and 3			T		2 and 3	Ť	2 and 3	abuka	2 and 3		4 and 5		2 and 3	and 3	1 and 2	2 and 3		2 and 3	2 and 3	1 and 2	and 3	П	3 and 4
A←B	Tracks for	1	2 aı	2 aı		- I	7	lčev	6	1	1.5	2 a	2 au		2 au		9		2 aı					2 aı	ı	2 aı	0-1	2 a	0,	4 81		2 aı	2 au	1 a	2 aı		2 aı	2 aı	1 a	2 aı		3 aı
Direction	Maximum permitted train length	14	537	740		842	_	on Pan	tion,	615	1	740		П		570			523					009	Ī	594	ion 2a	206	gojev	493		544	624		387		744	457		693	П	732
	longest trains		Н	H	+	\pm		unctic	ne june			13	-	Н	\dashv	+	+	Ħ	Н	7		H	Н	-	t	+	e junct	_	ci - Bc	\vdash			╀	+	┢	-	H	-	H		H	
Direction A→B	вссерівисе оі іре Дівска іог	13	2 and 3	2 and 3		1 and 2	7 911	en line	Open lii		OXOXO	2 and 3	2 and 3		2 and 3	2 3 and 4			2 and 3			L		2 and 3		2 and 3	Varoš - Open line junction 2a - (Jabuka	2 and 3	Novi Sad - Odžaci - Bogojevo	4 and 5		2 and 3	2 and	1 and 2	2 and 3		2 and 3	2 and 3	1 and 2	2 and 3		3 and 4
2007 100 100 100 100 100 100 100 100 100	Maximum permitted train length	12	537	740		842	610	go - vi	195) - (dro Mil	740	568		523	570	010		523					009	l	594	roš - O	206	vi Sad	492		544	624	710	387		744	457	240	989		730
sbeed bermitted	Гей ітаск	11	50 (70)	8		. 09		ad Duna	04 Topčider (km 4+195) - Open line junction "G" - (Rakovica)	20	205 Bandelo Milošeno - Casto - Cultofico	Dallar			09			20	(08) 02	(00)	•		(08) 09	<u> </u>			evo Va	50	207 No	i		09		•		100			65	2	100	
mumixsM	Right track	10	50					Beogr	pčider	00	3			- 5					20	7			60	8			206 Pančevo				2.00				- 3	_						
λ	Railway line categor	6	A	A	S	υ ξ	3 8	3 (1	04 To		D4	0	\mathfrak{S}	C3	ව	ප ද	} ∢	A	A	А	A A	A	A	Ą	¥ <	t 4	20	D2		-	D3	3 8	D3	D3	$D3^2$	$D3^{2}$	D3	$D3^{2}$	${\rm D}3^2)$	$D3^{2}$	$D3^{2}$	D3
3	Class of railway line	œ	R	R	24	<u>م</u> م	4 0				24		×	R	K	24 0	4 24	2	R	R	M M	R	R	24	4 0	4 24		×		24	4 6	4 24	24	2	×	×	R	R	R	R	R	ĸ
21111	Single/double-track l		S	S	ΣZ	20 0	t	K.				r	S	Ω	70	S S	2 52	22	S	S	so so	S	S	SZ CZ	2 0	2 02	1 1	Ś		H	2 0	0 70	2 02	S	S	S	S	ſΩ	S	S	S	Ω
adil	I vaert-aldrob\aloni2	7	02	V2	V2	92	2	rad			Ω	L	V2	V2	02	02 0	100		02	02	02 0.	02	V 2	V2 ("	2 02	ļ ļ			<u> </u>	<u>"</u>	2 02		\perp	V2	V2	02	V2		02	V2	V2
1	Type of service poin	9	11	1	3		1 7	CI imo		1	9	F	00	3	-	∞ -	9	12	1	12	9 6	3	3	(2 6	2		1 9		-	4 4	0 -	-	10	1	3	1	1	10	1	3	1
	e rains Time Name of service point	4 5	137+138 BANATSKO MILOŠEVO POLJE		148+600 DERIĆ	160+114 KIKINDA	144433 STATE BODDED	47423 STATE DONDER 203 Beograd Donji Grad (km 74	3	5+700 TOPČIDER TERETNA	6+795 OPEN LINE JUNCTION G	0+356 BANATSKO MILOŠEVO	BOČAR	10+700 ESTER	18+063 PADEJ	25+230 OSTOJIČEVO				1+391 JUNCTION POINT 23 SENTA	40+759 OPEN LINE JUNCTION SENTA (CANCELLED) 42+293 GORNIT BREG		54+223 DOLINE		62+071 GABRIC	76+685 SUBOTICA	›	0+275 PANCEVO VAROS 1+539 OPEN LINE JUNCTION 2a			3+595 SAJLOVO	97100 VEIEKNIK 12+554 FUTOG	25+111 PETROVAC-GLOŽAN	29+542 BAČKI MAGLIĆ	36+092 GAJDOBRA	44+224 PARAGE	50+447 RATKOVO	59+003 ODŽACI	61+240 ODŽACI KALVARIJA	65+448 KARAVUKOVO	72+471 BOGOJEVO SELO	1) At the urea of service points Galabbra, Odificial and Karenukoron line cutegory A
			15.514 137								1.095	F	4.749			5.046 31					*1,595 40		1466	3.825 58				1.264		2-0-2	50.0	3.454						8.556 59			7.023	214 7,
	Distance in km	3	15.	4	7	- 12	Ţ	'n			_	L	4.	5.	7.	7.	1 4	3.	*I,	1.	*1	6.5	5.0	. 3	4. 4	12.(-		Ľ	7	. 6	12.557	4.	9	8	.9	8	2	4.	7.1	4.
Date of handover to public transport	Right track Left track	1 2					15.11.1857.			.48 .60 .60	61 61		15.09.	1090.	15.09.	1896.		1915.	4000 minutes			1	1880	1003.				09.04. 1894.					14.00	1895						24.12.	1908.	At the area of se



	Altimde	30	7 78	83,1		8	81,5	81	78,6	88.4	77,4	77,4	79,8	87,8	80,5	80				80.3	6.08		101.0	80.9	81.6	80.0	79.2	79.1	78.5	79 1	1,7,1		82.4	85.5	91.2	8.06	96.2	101.9	109.4	114.4	122.3	121.6	119.8	134.6
	Loading gauge	67	74.1	ŽS-I	ŽS-I	ZS-1 ŽS-1	ŽS-I	I-S	ŽS-I	ŽS-1	ŽS-I	ŽS-I	I-S.	ŽS-I	ŽS-I	S-I		ŽS-I	ZS-I	-	ŽS-I			ZS-I	72.1	ŽS-I	ŽS-I	I-S	ZS-I	78-1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	I-S	7.S.I	ŽS-I	ŽS-I	ŻS-I	ŽS-I	ZS-I	ŽS-I
the line [daV]	←	28	F	5	ALM IN	2	+	Н	4	3 2	+	Ž	9 Ž	3 Ž	+	5	H	ALM IN	- Z	-	NN -		_	+	2 5	+	Ž	Z	7	N PIN	1 1/2	ZZ	Ž.	Ž	2 2	N/CV	· PE	7 12	IPIN	FZ	4	Н	3	5
Ruling resistance of	\rightarrow	27	1	9		4	- 7	3	7	v.			11	5	4	9	H	T.	4		ď				2 0	1	Ħ	8	_				5		7		7	"	,	T	4		6	5
gradient	Slope	26		5		4	4	н	4	c			8	1	5	4			0		0		j	9	7 -	4			7				0		1		0	c	>		2	8	7	2
guiluA	Indine	25		5		~			6	5			10	3		9			3		61			0 0	7 -		Ц		-	88			3		7		7	~			4		7	4
[0%] u	Gradient of the static	24	7		Ц	1.0	0		0 -	0.0		3.0		4.0		0.0				0	0.0				0.0				0.0				0.0					0.0						0.0
sn	operations Minimum curve radi	Н		450		1000	1000	1000	200	450	700	950	400	400	400	300					300			300	200	500	400	009	300		300			700	909		700	00/	700	700	700	5500	700	700
	Open for the accepta dispatching of passer	22		P/F		P/F		P/F	д г	P/F	Ь	Ь	P	Ь		Ы	Ħ	H					P/F	а г	P/T	I d			P/F			Ь	P/F	Ъ	P/F	Ы	P/F	P/F	I d	Ь	P/F	P	P E	P/F
atnioq s	Occupancy of servic	21	٩	Ъ		11	þ	D	Þ	F			U	U	D	ы		,	Ы	Þ	0		Ы	Þ	٩	-			4	385	200		Ъ		n		Þ	۵	1		Д		Þ	Ы
ппода	Side-\end-loading pl	20	L	Ø		V.	2	ď		V.			Ω	ď	S		70			V	2		ď	S	20	2 02	Ц		S/E	38	338						1			L	ď	Ц	\perp	ď
	Freight car scales	19	L	L		4	-				L						Yes						4	4	-		Н										4			\perp	Ц	\perp	+	1
oiu	Service point code -	18	23301	23001		22311	_	\vdash	70000	22306	22305	22304	22303	22302	22301	22203	16871 Yes		23301	22301			16550	16601	16602	16604			16350			16300	16301	16302	16303	16304	16305	16307	16308	16309	16310	16311	16312	16314
he service point	Manner of securing t	17	-	1	10	œ	10	8	-	4	-	30	5	S	10	10	4		_	10	10		н	6,	10 7	1	-	-	7	-	1 -		8	- 20	4		∞	4	+	╀	4	\perp	4	4
noñslu,	जिन्नात्स of traffic reg	16	-Open line junction Sajlovo - Rimski šančevi - Orlovat stajalište	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	nonomic ann mado oxorbe	station distance	block post distance		station distance	(Zvornik Novi)		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	seceptance of the longest trains	2	<u>:</u>	2 and 3		2 and 3	2 and 3	2 and 3		2 and 3			2 and 3	2 and 3	2 and 3	and 2		T		1kićevo)		order -	5 and 6	2 and 3	2 and 3	3	Ħ			345	3000	V S	1 and 2		2 and 3		2 and 3	2 and 3	1	T	2 and 3		2 and 3	nd 4
Direction B→A	Tracks for	Ι,	ančev	2 aı	Ц	2. at	2 aı	2 aı		2 at			2 aı	2 aı	2 aı			Ц	_	Cukió	4	ate bo	5 aı	2 aı	2 9	1	Ц					L	1 aı		2 aı		2 aı	7 91	4	L	2 aı	Ш	2 aı	3 aı
noiteatid	Maximum permitted train length	4	nski s	558		593	533	548		573			804	787	555	253	altove			1a - (1	3	ıa - st	639	209	869	370							614		497		542	614	5		853		574	618 3 and 4
	longest trains	H	퀴	13	H	+	+-	Н		+	-		Н	-	+		· I I	T		ction	+	Borir	-	-	-	+	H	2	13	t	t		Н				13	+	+	T	Н	\vdash	+	
AضB	Tracks for	<u> </u> = ,	ollovo	2 and 3		2 and 3	2 and 3	2 and 3		2 and 3			2 and 3	2 and 3	2 and 3	1 an	I I		0000	2 and 3	7	Donja	5 and 6	2 and 3	2 and 3	1	П	0	2 and 3				1 and 2		2 and 3		2 and 3	2 and 3	1		2 and 3		2 and 3	3 and 4
Direction	Maximum permitted train length	12	nction Sa	558		593	533	\vdash		573	+		804	787	555	253	SAG MAKSHALLING TAKU			210 Orlovat - Open line junction 1a - (Lukreevo)	000	- Open line junction Donja Borina - state border	639	607	869	200			467				614		497		542	614	170		853		574	819
pəəds	Left track		ine ju				100	(g					(0)			DOT	HSH.			ovat -		line			(0)							100	3U.)							(0)				
Maximum permitted	Right track	01	Dben	40			9	00 (80)					(08) 09			8 3	10 MZ	10	1	5 0	30	Oper			70 (80)				•	S		7 02	/0 (80)							(08) 09	2			
, A	Railway line categor		Sad)	3	ឡ	A	4	A	٧ <	4	A	A	A	A	A			8		- 5	A	Šabac		D3	50 50	E E E	D3	D3	D3	A L	D3	D3	D3	A	A	Ą	∀ •	∢ ⊲	D3	2 2	A	A	٠ A	D3
	Class of railway line	00	No.	R	\vdash	~	4	M M	24 12	4 2	2	R	R	R	M	2 S	\ <u></u>	2	+	-	~		-	_	지 a	+	Н	+	+	× 2	+			R	R	24	24 15	4 A	+	4 24	~	R	24	4 24
əui	Single/double-track	1	208 (Novi		ď	v.	+	H	#	2 02	1	H	S	S	Ω			02	-	1	S	2		+	20 0	+	Н	+	+	20 0		+	Н	S		+	+	20	+	2 02	+	\vdash	+	2 02
120	Type of service poin	Н	_	_	9	-	10	1	10	n -	3	3	1	1	_	7	-		4		9	21	1	- 0	× -	3 +	9	9	_	9	9	3	2	3	1	3	- ,	s -	3 -	9 60	Н	3	+	2 -
																																											T	
	Name of service point	ક	ONOHVS	RIMSKI ŠANČEVI		OPEN LINE JUNCTION 2 (UKINUTO) KAĆ		ŠAIKAŠ		TITEL		KNIĆANIN	PERLEZ	FARKAŽDIN	ORLOVAT	ORLOVAT STOP	1+141 NOVI SAD MARSHALLING YARD	NOVI SAD LOKOTERETNA	SALOVO	75+015 ORI OVAT	OPEN LINE JUNCTION ORLOVAT				NIKINCI PI ATIČEVO	KLENAK	OPEN LINE JUNCTION 1	OPEN LINE JUNCTION 2		SABAC (end km) OPEN LINE HINCHON 2				DUBLjE MAČVANSKO		RIBARI	PRNJAVOR MACVANSKI	PODKINSKO NOVO SELO I FŠNICA	JADARSKA STRAŽA				KOVILJAČA	65+354 BRASINA
	Chainage	4	4+004	10+148	14+608	15+751		32+224	38+394			53+845	8+175	65+522	75+381	76+256	[+141	1+595	2+185	1-015	76+545				21+344	28+900	31+373			33+695		1+000		14+300		25+800	28+713	35+000	38+900	45+400			56+183	65+354
	one area of)	7				100			TING		10000								Ш	7.5														16										
	Distance in km	3		5.242	*2,984	1.143	4.649	7.006	6.170	5.587	1.700	2.713	4.3.	7.347	9.859	0.8		0.454	*2,048		0.630			10.827	3.331	7.556	2.473	0.5	0.763	0860	0.682	2.606	3.725	6.575	7.731	3.769	2.913	1 700	3.900	6.500	5.996	2.004	2.783	3.654
public transport	Left track	2	31.05	1964.		02.07.	1889.		02.07.	1889.	15.07.	1927.	9	15.09.	1925.						11.09.1935.			.11.	1901.			03.06.	34.								15.05.	1950.	1000000	98000				
Date of handover to	Right track	-	2	19		02	18		02	18	15	19		15	15						11.09			0.5	19		L	03	15								15	19						



		30	6.9	7.7	П	79.3	Τ			T	144	144	Į,	147.4	153.4		167.5	П	169.5	174.8		186.8		105.7	7:0	202.4	G	0 1 1 0	212.4		7.8.7	7	228.4	7.3		250.3	291.6		298.2	Τ		П
	Altitude	Н		137	┦					7.0 P			+	-			-	Н	+	+	L	Н		-		Н		0 50	Н		228.		+	237.	-			-	+	1		Ц
	Loading gauge	29	ŽS-I	ŻS-I ŻS-I		78-1	7.07		ŽS-I	ZS-I	ŻS-I	ŽS-I	Żs-I	1-S2	ŢSŽ	ŻS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I	ŻS-I	7s-1	-52-I	ŽS-I	ŻS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ŻS-I	7. 1. 2. 1. 2. 1. 2. 1. 2. 1. 2. 1. 2. 2. 1. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2.	1-62-1 7S-1	ŻS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	ŽS-I	ŽS-I
resistance of the line [daN]	←	28		. 9				L			10	2		7	5	,	7		S	2		9			7	7	0	λ .	9		00		4	5		7	6		5	1		5
Ruling	→	6 27		0 4	}	'		_		-	10	1 2	-	1	v.		2 7	Н	+	3		5 6		-	+	4 7	7	0	2 6		3	+	4	ς.	-	7	6		3	+	\perp	3
Ruling gradient	Incline	25 26	-	0 4	1 1	0	Η	+	H	+	7 5	2 1	+	9	5	-	7 2	Н	+	4	H	9	+	-	+	9	,	-	6 2	\dashv	7	+	4	5	┰	-	8 2		4	+	H	5 1
[0%] u	Gradient of the statio				11	Ī				İ	3.4	0		4.4	5.3	2	8.0		6.2	5.3		4.55		4 0	0.73		d		7		4.6	,	9.0	6.17		5.7	3.9		3.3	Ť	Ħ	
sn	Minimum curve radio	23	700	300		300	200				200	250		250	700		200		200	200		500		003	onc	300	000	200	600		009	000	900	500								
	Open for the acceptan dispatching of passen operations	22	Ъ	Ъ				P/F	P	Д 0	P/F	P/F	Ъ	A D	Ъ	Ь	Ъ	Ъ	P/F	Д Д	ч	Ь	Ы	۲ D	거 더	P/F	Ę	P/F P	Ъ	Ъ	Ъ	Д	ч р	P/F	P	P/F	P	P	P/F	<u>م</u> م		P/F
taioq a	Occupancy of service	21		Ъ			1	Ь			Þ	Ы		>	Þ		D		Ы	Þ	I	n		E	>	Ъ	F	-	n		Þ	;	>	۵		D	Ω		ы			Ъ
шоди	side-/end-loading pla	20						S		_	Ø	ß		ν.	ď	2	S	Ц	Ω	ω	L	Ø		ō	2	S/E	Ç	2	ß		Ø		'n	ν2 (/2		Ω			ď	1	L	S
	Freight car scales	Н			-	+	4					0.025				L		20	_						6 02		\perp		22		1		120 00	Yes					+	+	H	Yes
nıc	Service point code - 1	18	16315	16319				13352	12219	12201	12203	12204	12218	12205	12207	12220	12208	12209	12210	12211	12216	12213	12217	12214	13220	13251	10001	13002	13003	13004	13005	13014	13006	13060	13010	13007	13008	13013	13009	13015	17001	15150
he service point	Manner of securing t	17		3			7	-			00	4	_	7	2		2		7	7		2		c	7	4	,	0	3		3	,	7	3	,	3	3		3	I	1	П
noitelu	Manner of traffic reg	16	station distance	station distance	- (Štitar)	station distance	Station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the longest trains	.5			tion 3	T		1		t	2	4	Τ,	7	8		3		3	6		3	1	,	0	4	١,	2	3		3		2 and 3	2		3	2		3		T	
Direction B→A	train length Tracks for			+	ne junc	+	603			+	2		4			L			4	_			+				-		Н	-	4	\neg							4	+	╁	
	Maximum permitted	14			Open li		- Pož	_			412	714	-	286	625		602		693	089		647		239	00	738	300	9	909		905	+	709	877		615	627		618	1	¥	
A→B	Tracks for acceptance of the longest trains	13			tion 1 -		Stalać - Krali ego - Požega	4			2	4		7	6	,	3		3	က	200-2	3		,	2	4	۲	2	3		3		2 and 3	2		3	2		3		236-8	
Direction	Maximum permitted Train length	12			ine junc		Stalać -	582			412	714	, .	286	625		602		693	089		647		657	/00/	738	200	500	909		605	000	7.09	87.7		615	627		618			
Maximum permiffed speed	Right track Left track			50	(Platičevo) - Open line junction 1 - Open line junction 3	50	213			30 (50)										25 (40)										80	3			- 10					100			
	Railway line category	Н	23	A 53	latičev	5	3)	ප	8 8	3 8	ខ	B2	B2	7 Z	B2	B2	B2		B2	B2	B2	B2	92 93	B2	B2	D4	1 A	D4	D4	D4	D4	4 5	4 5	7	D4	D4	D4	D4	D4 D	7 7	D4
100	Class of railway line	8		2 2	1	-	1	F		24 0		Н	+	<u>م</u> م	+	Н		Н	+	2 0		R	-	+	4 4		2 2			R I	$^{+}$	+	٦ a		+		R J		+	~ ~		
əui	Single/double-track l	7	S	ω w	1	V	1	-		02 0	2 02	Н	20	20 0	+	N N		ď	+	02 0	+		02 0	20 0	2 02	H	S S	+	Н	S	+	S S	+	2 02	S	\vdash	S		+	v2 v2		
1	Type of service point	9	3	6 113		9 9		1	3	e е	, H	П	3	- "	7	3	1	3	-	"	, w	-	c, α	5 -	3 -	1	12	3 -	1	3	11	ε,	- r	n -		1	2	3		n r	12	1
nogari	Distance in km Chainage Name of service point	3		0.885 68+685 OPEN LINE JUNCTION DONJA BORINA *0.800 0+800 STATE BORDER		0+000 OPEN LINE JUNCTION 1	0.00	0+374 STALAĆ	1+400	2.487 3+887 MRZENICA 5.083 8+070 MAYDEŠANE		14+559		1.984 21+384 KOSEVI		33+700		3.402 38+949 TRSTENIČKI ODŽACI		6.745 49+200 VRNjACKA BANjA 4 038 53+238 I TBOWA	2.400 55+638 TOMINAC		59+938	2.287 62+225 VRBA		3 71+621	0.917 72+538 JUNCTION POINT 73 KRALJEVO		84+441	88+610	92+260	94+500	1.803 96+303 ZABLACE		110+200	112+994	120+494		128+366	1.534 129+900 GUGALj 3.800 133+700 BORAČKO		0.073 136+107 POŽEGA
public transport	Leff track	7	15.05.	1950.						15.05.									01.12.	1958.						42.73				29.09.	1955.					1076			Ţ	28.11.	;	
Date of handover to	Right track	1	15	19						15	1								01.	19										29.	19				8	87	T		ę	70	1	



	sbutitlA.	30			П		0.05	۲۵,		85,1		83.0					83.0		ĺ		76,2	1,001	1,53,1	175,3	129,2	1	105,3		127.0		153.0	154,1		T	210.0			289,2
	Loading gauge	29		ŽS-I	*	3	, ýc	ŽŠ-I	ŽS-I	ZS-I	ZS-1 ZS-1	ŽS-I	f			İ	1	78.1	ZS-I	ŽS-I	ŽS-I	7.5.1	1.52	ŽS-I	ŽS-I	ŽS-I	ŽS-I	1.57	ŽS-1	ŽŠ-I	ŽS-I	ZS-I	ZS-I	ZS-I	ŽS-I	ŽS-I	ŽS-I	ŽS-I
the line [daN]	←	28	П		П		T		Н	8		4		H		ł		r		1	10	+	7	1	10		10		2	+	2	-	+	7		Ħ		
Ruling resistance of	\rightarrow	27								14		7				Ī		-	-	œ		Ç	Π	11	2	S=8	7		6		11	3	-	×	6			6
gradient	Slope	3.3	Ц		Ш				Н	<u>_</u>		4			Ш			v	>	0	∞	_	7	0	10	$\overline{}$	10		2		2	-	-	0	-	Ц	\rightarrow	0
Ruling	Incline	25	H	4	-				Н	12		9 /	L		Ш	ļ	N	-	1	7	0		OT C	01 0	0 2	2 30	2		8	_	8 10	3		8	L 0	Н		7
[0%] u	Gradient of the statio	24	Ц				0		Ц			0.7		L			0.7	26		ш	0.0	_	0.0	4.0	0.0		8.5		0.0	L		8.0		1.5	0.0			0.0
sn	Minimum curve radii	23					- 1	T		250		450						350			300	900	900				400		450		400	300			300			300
nce and	Open for the acceptan dispatching of passer operations		1				Đ, C	T/L	Ъ	P/F	Ъ	P/F	127	1621			P/F	P/R	Ъ	Ь	<u>_</u>	Y E	P/F	Ь	Ь	Ь	P/F	4 0	4	, 4	P/F	Ь	Д ,	<u>а</u>	P/F	Ь	Ь	P/F
atnioq a	Occupancy of service	21 \$FFT(Ш		۴	4 10	Ц	Ы		Ь	D				Ы	ρ	4	Ц	Þ	F)	Þ	Þ	Þ	Ы		Þ	_	Н	Þ	1		Þ	Ш		Ь
motte	Side-/end-loading pl	20 ×						1	Ш			Ω			Щ	ļ	Ω			Н	4	1	-							L	S		1		ď	Ц	Ц	Ω
	Freight car scales	119		=	H		4	+	Н	_			1	H		ŀ			-		_				L	_	_		_	-				_	_	H		
	Servi ce point code -	TOSEI	CECOE	(0,10)			13670	17001	13602	13603	13604	13551					13551	14551	14606	14502	14503	14504	14506	14507	14508		14510	14511	14512	_	14514	14515	_	14523	14519	-	_	14401
he service point	Manner of securing t	17 INE (ragač		4	۰		Н	- 1	1	1	-	L		ŀ	П	۲	,	9	∞	٥	×	7	4	10	∞	1	4	10	7	7	_ ;	2	-	Н	10	-
noitslu	Manner of traffic reg	16 19 20 21 No 73 - (Adrani) LINE CLOSED FOR TRAFFIC	station distance	station distance station distance innerion point No 53 - innerion point No 54 - Orasasčero)	a) Look mod m	Krsna	complete an idea	station distance	station distance	station distance	station distance station distance	station distance				iac)		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	longest trains			-luctio	\vdash	Mala	Т	+	H	+	+	Н.	Ka Ka	Т	Н	žogrī	Т	+	t	Н	+	+	+	-	Н	+	+	\dagger	+	t	+	+	+	+	+	Н	+	4
B→A	scceptance of the Tracks for	15 tion t	Tion I	1.1		nac -	۲	٦		3		4	ovo lu			· (Vra	4	C	1	Ш		,	7	7	2		Э		2	1	2	7			6			3 and 4
Direction	train length	- inno		- N		- Radi	027	000		743		633	edere			1,2,"	633	5/13	2	П	1	9	240	533	929		604		520		989	700	Ť	t	562	П		681
	longest trains Maximum permitted	1072	7	- i	-	zava	-	1	Н	7		9	<u>-</u> -	H	Н	nction	9	v	,	Н	+	4	0	S	9		9		3	+	9	7	+	+	η,	Н	_	-
g∠₩	acceptance of the	13	T TITO	othor		on Je	c	٥		3		4	ezava			ne ju	4	C	1	Ш		5	4	2	2		С		2		2	7			6			3 and 4
Direction A→B	train length Tracks for	12 13 14 15 - imction point No 72 - inaction point	d nom	ا. ا	+	- juncti	450	0	Н	711	+	679	rction.	H		- Bor - open line junction "2" - (Vražogrnac)	629	573	2	Н	+	9	240	533	929		604		520	+	989	700	+	+	562	Н	\dashv	681 3
annon vo	Maximum permitted			a. (IIzi		oen lin		†		7.		9	line ju			Bor.	9	Ŷ	,		_	4	ñ				9		3	+	.9	7			Š			9
Maximum permitted speed	Right track Left track	9 10 11 Mataruška Bania	im or pag	C3	50	Smederevo - Open line junction Jezava - Radinac - Mala Krsna		50			30		217 Open line junction Jezava - Smederevo luka	1		218 Mala Krsna	5	40						(08) 09										50				
Á	Railway line categor	9 atamis	_	C3	7	mede	2	D 7	D4	D4	88		7	D4	D4	8 Ma		4 5	B2	B2	B2	52	D3	D3	D3	D3	D3	D3	3 2	A	A	Ą	¥.	4 <	4	A	A	A
	Class of railway line		T			- 9	_	1	Н		+	R (- W		21		지 a		Н		+	4 M	H	Н		+	Ψ p	+	+	R	W I	24 1	2 4	4 4	W.	R	M M
10000000	Single/double-track l	7 raliev	- A	S			ŭ		H	\dashv	\pm	S		ζ2	H	ł		20 0	1	Н	\pm	+	2 02	H	Н	+	\dashv	מ מ	+	t	Н	#	\pm	\pm	2 02	H	+	S
	Type of service point	6 j	12	12 ectino	2 2	4	٦.	+	Н	4	3	1	9	_	Н	ł	-	5 -	3 .	Н	+	+	3 -		Ш		+	2 6	+	3	1	+	+	∞ ,	+	H	3	_
		track of the stat	Hack of the state	215 Connecting track of												•																	202					
	Name of service point	5 6 7 8 214 Connecting track of the station Kralievo	0+444 JUNCTION POINT 72 KRALjEVO	0+000 JUNCTION POINT 73 KRALJEVO	0+000 JUNCTION POINT 54 POŽEGA		-0+870 BEGINNING OF THE LINE	OPEN LINE JUNCTION JEZAVA	3+250 GODOMIN	RADINAC	9+124 JUNCTION POINT 64 RADINAC 9+466 VRANOVO	10+872 MALA KRSNA	0+000 OPEN LINE JUNCTION JEZAVA	2+484 OPEN LINE JUNCTION JUGOPETROL	4+011 SMEDEREVO LUKA		71+272 MALA KRSNA	82+200 LjUBICEVSKI MOST 87+763 POŽAREVAC	89+100 JUGOVIĆEVO	SOPOT POŽAREVAČKI	95+632 BUBUŠINAC/BRATINAC	BARE/KASIDOL	MAIILOVAC	SIRAKOVO	Ljubinje	ČEŠLjEVA BARA	RABROVO/KLENjE	133+600 MIŠTAPIC	ZVIŽD	140+650 KUČEVSKA TURIJA	KAONA	148+582 KUČEVO	NERESNICA	156+492 NERESNICA	153+750 VOLUM 163+582 BRODICA	BOSILjKOVAC	170+740 BLAGOJEV KAMEN	178+852 MAJDANPEK
		2	44 JU.	00	00 JU.	2	70 BE	49 OP	50 GC	11 RA	24 JU 66 VR	72 M.	00 OP	84 OP	11 SN	H	72 M	100 E	2 P	90 SO	32 Bt							00 M	2 29	50 KL	46 KA	82 KI	10 NE	92 NE	28 88 88	00 BC	40 BI	52 M
	Chainage	4	0+4			<u>-</u>						1.00	9+0										106+350															
	Distance in km	3		*0,444	0.752	1	0.613	*1,832	*1,475	3.461	2.413	1.406		2.484	1.527			5 563	1.337	0.990	5.542	3.168	3.623	2.705	7.359	5.858	3.766	2100	2.167	4.583	3.896	4.036	5.034	2.876	3.882	3.218	3.940	8.112
Date of handover to transport	Right track Left track	1 2			25.09. 2001.				10.11.	1888.							01.12.	1920.							12.03.	1939.								15.05.		29.09	1958.	



	Altitude	30		376,9	I	474 5	ì		518,3		426,1		364,6	356,4	278,7	201,6	152,1	I				286,6	T	443)	374,7		T		245.7		216,2			188,5			148	7	128
	Loading gauge	29	Żs-I	ŻS-I	ŽS-I	78.1	ŽS-I	ŽS-I	ZS-I	7.5.1	ŽS-I	ŽS-I	ŽS-I	ŢS-I	ŢS-I	ZS-I	I-SZ	ZS-I	1-67		ŽS-I	ŽS-I	ZS-I	7.5.1	ŽS-I	ŽS-I	ŢS-I	ZS-I	1-S7	ŽS-1	ŽS-I	ŽS-I	ŻS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	Į.SZ	ŽS-I
the line [daV]	←	28						\vdash	01		15		15	_	_	-	- 12		0							13		+		13	\vdash	6			9			1	+	7
Ruling resistance of	\rightarrow	27		15		16	21		1.5				•	3								13		13	1	5			Ī						3			v	,	2
gradient	Slope	-		0		c	_	-	10	1	14	L	13	Ξ	\rightarrow	+	+	+	0			0	_	C	+	11		1		10		6			9		Ц	-	1	9
gniluA	Indine	H		2.0 14		3.0 13			14	-	2.0 0		0.0			_	1.0	0	0	-		0.0	+	2.0 11		0.0		+	+	0.0	_	0.0		H	0.0	-	4	0.0		0.0
[0%] U	Gradient of the statio	24		Ш		┸	┸	Ц	4	1		L	Ш	_			_					Ц	4		Ш	Ц	4	4	1		上		Ц			4	4		\perp	
sn	operations Minimum curve radio			350		300	Š		1		350		350	250	250	250	300					250	1	240	í	250				250		250			400		_	2.40	_	300
nte anu ngers/freight	Open for the acceptar dispatching of passer	22	Ь	Ь	Д г	P/F	P	Ъ	4	4 4	Ь	Ь	Ь	P/F	Ы	P/F	P/F			P/F	Ь	P/F	ы	4 4	Ь	P/F		ы	4 6	д	Ь	Ь	Ъ	Ь	P/F	Ы	М	P F	T d	P/F
	Occupancy of service	+	F	D	+	Д	,	H		t	n	F	U	Ъ	n	n	Ы			Ъ		Н	+	11		Ь		-;		11	F	n			Ь		Ħ	-	+	Ъ
	side-\end-loading pla			Ω	T	V.	2	П	T	T	Ø	Ī		S		22	ď	Ť	Ī	ω		Ω	T	v.	2	ß	T	T		v.		Ω	П		Ω		T	v.	2	ω
	Freight car scales	-				Ī	T		1		Ī	T			Ī	1	Ī	Ť					T		Г		1	1	t	Ī	Ī						Ī	I	I	
nıc	Service point code - 1	18	14410	14402	14403	14411	14408	14412	14405	14409	14407	14413	14350	14305	14304	14303	14302			12550	14003	14001	14002	14004	14006	14007		14008	14009	14011	14012	14013	14014	14015	14016	14017	14018	14019	14021	14060
he service point	Manner of securing t	17		日		-			-		1		-	4	-	н,	ц,	н,	7	-		œ		œ	,	8		-	×	9		-			8		,	∞ v	,	4
noñslu	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	stanon distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
B→A	longest trains	15		2 and 3		2 and 3			Ì		-		2 and 3	2 and 3	2	2 and 3	2 and 3		n Port	3		2 and 3		3	5	and 2			2 and 3	2		2 and 3			2 and 3		Ī	2. and 3.	one .	1 and 2
Direction	train length Tracks for	4		631 2		538	+		t	t	999		652 2		\neg		560 2		rahor	662		494 2	Ť	470		497 1	1			583		617 2	Н		650 2	1	t	656	_	828 1
	acceptance of the longest trains Maximum permitted	ı		2 and 3 62		2 and 3 50	+	- 9)9		2 and 3 65	d3	+	+	2 and 3 56		219 (Niš) - Crveni krst - Zaječar - Prahovo Port	3 66		and3 49		3 47		and 2 49		-	and 3 511	55	_	and 3 61	Н		and 3 6.5			2 and 3 64	+	1 and 2 82
Direction A→B	train length Tracks for	-		Н		-	+		+	+	50		Н	+	+	$^{+}$	+		krst - 7			7	+			H		+	71		L	2	Н		7	-	4	+	+	_
	Maximum permitted			631		538					999		652	582	442	260	260		Trveni	989		494		475		497		_	511	628		617			650			959	3	828
permitted speed	Left track	Ξ								40									Nië) -		65				65				09		;	65			30	2			20 (30)	,
mumizsM	Right track	101	L				_		_		_	_		_	_	_	_		210	L				_	_	_		_		_	L		L	_		_	_	\perp	-8	ŝ
λ	Railway line categor	6	ខ	ප	3 3	3 8	8	ខ	8	3 8	8	\mathfrak{S}	\mathfrak{S}	ខ	8	8	8	8	3		B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2	B 2	3 Z	B2
	Class of railway line	00	~	~	<u>در</u> د	4 2	4 24	~	4	4 2	×	ĸ	ĸ	4	~	<u>ا</u> ا	2	4	4		A	M	24	4 2	4	R	4	<u>د</u> ا	4 F	4 2	2	~	В	R	ĸ	ĸ	24	~ ~	4 4	×
əui	Single/double-track l	7	Ω	Ω	σ2 c	Q V.	2 02	Ω	S S	2 0	Ω.	Ø	ß	S	S	02	σ ₂	02 0	Ω		ď	Ω	so c	2 0	Ω.	ß	Ω	Ω į	o o	2 02	Ω	Ω	Ø	S	ß	Ω	S C	oz oz	2 02	Ω
1	Type of service point	9	3	2	e c	- ر	3	3	7 (n (r	1	3	1	-	7	-	1	9	٥	1	3	-	3	2	3 1	1	6	9	7 6	2 2	3	-	3	3	1	3	3	∞ -	3	1
	Chainage Name of service point		181+800 DEBELILUG	187+674 LESKOVO	191+800 JASIKOVO	1947/00 VLAOLE SELO 1974187 VLAOLE			203+673 CEROVO	20/+600 KRIVELSKI POTOK	215+200 MALI KRIVEL;	217+500 BREZONIK	221+401 BOR	224+350 BOR TERETNA	231+092 BORSKA SLATINA		244+699 RGOTINA	249+032 OPEN LINE JUNCTION 3	2304043 OPEN LINE JUNCTION 2	0+957 CRVENI KRST	7+493 PANTELEJ	12+382 MATEJEVAC	20+645 GORNJA VREZINA	2/+455 JASENOVIK 30+257 (RAMADA		40+018 SVRLjig	45+916 KM 045+916 SC	46+010 NISEVAC	49+332 PALLULA	60+878 PODVIS	62+741 RGOŠTE	68+365 KNJAŽEVAC			81+907 MINIĆEVO		88+206 MALI IZVOR	96+074 VRATARNICA 103+046 CRT:4N	7+300 TTMOK	111+606 ZAJEČAR
	Social description		2.948 181				ㅗ		_	\perp		2.300 217	Ш		_				1.013 230	_				2.804 30					3.322 49										_	4.306 111
Name -	Disfance in km	3	2.5	5.8	4.1	2 487	3.0	2.1	6	4 000	3.4	2.3	3.901	2.5	6.7	6.5	9.9	4.	1.1		6.5	*4,977	8.2	2.8	23	7.4	5.8	0.0	3.2	0.0	1.8	5.624	3.7	2.5	6.8	2.552	*3,831	*7.052	4.2	43
Date of handover to public transport	Right track Left track	H					10.00	1972.						29.11.1967.	03.10.	1963.	25.06.	1960.								15.12.	1777							101	1714					



	əbutitlA	30	116,1	T	;	CII		84,4	N.	9,99		0 93	567	,,		39.1	40,3	55,4					T	T	353.3	T			194				212,3		ĺ	Ī		241		255	0 07 0	240,0	290
	Loading gauge	56	Ţs-ī	ŢS-I	ŽS-I	ZS-1	ŽS-I	ŽS-I	ŽS-I	ŽS-I	ZS-I	ZS-I	ŽS-1	78-1	ŽS-I	ŽS-I	ŽS-I	I-SZ	ŽS-I	ŽS-I		, vc 1	1-04		Н	ZS-I	1.5%	1		ŽS-I	ŽS-I	ZS-I	7.S-1	1-87	ZS-1	1-82	ŽS-I	ŻS-I	ŽS-I	I-SZ	ZS-I	78.1	ŽS-I
resistance of the line [daV]	←	87	Н	7	-	7 7 7		6	7	9	7	+	,	+		4		1 2	18	7		ų					- 21			~~	7.4	+	× 1	7				3	. 4	7	+		114
Ruling To constant	\rightarrow	27	6		,	10		7		•				1		-	∞	S	-				1		6		"					•	×					∞			4	א	
gradient	slope	26	œ		,	2		8		4		,) c	>		4	∞	П	17			ŗ	0		0		-	2		7	0	0	0	0	-	4	0	0	0	0	0	0	0
Ruling	ənibal	52				10		1		0		4 100	2			1	7	5	-			c	>		∞		,	4		8	3		۰ ا	0 4	8	8	, 00	∞	6	9		0 4	N
[0%] u	Gradient of the statio	24	2.0			3.0		1.0		0.0			0.0				0.0												0.71				5.8					9.1		0.0		0.0	2.0
sn	Minimum curve radio	23	250		3.5	720		250		250		050	2.50	2		250	250	250	250											325	009	300	009	300	450	300	1000	300	300	1000	300	000	350
	Open for the acceptar dispatching of passer operations	22	P/F		4	۲ م	, д	Ь	Ь	P/F	Ы	م م	4 0	٦,		Ы	P/F	P/F	P/F							l			Ь	P	Ь	Д ,	ч ,	д, <u>Б</u>	, д	۵,	, _A	P/F	Ь	P/F	ᅀ	P/F	ь
	Occupancy of service	21	Ъ	1	E	4	t	n		Ы	7	Ť	F		t		Ъ	Ъ	Ъ		İ	Ħ	1	Ω	Þ	1	D I	0	Ъ	Ħ	1	1	5	t	T	t	T	Н	П	n	;	5	n
	Side-/end-loading pla		∞	1	T		t			Ω	7	ū	2 0	2	t	V2	σ2	Ω	22		ŀ		1		Ω	1	Ω	1	Ω	Ħ	\top		2	t	T	t	T	22	П	S		Ω	S
	Freight car scales			┪	+	+	╁	H			+	\pm	100		╁	1000		Н			ŀ	+	1	H	H	┨		+		Н	\dashv	+	+	t	╁	t	╁		Н		Ŧ	+	-
	Talent non televiral	1		┪			1_	-		, <u> </u>		<u></u>	+		-	_	_				ŀ	+	1	H		┨	_	1				-	_	_	+	+	+	150		_	~ ·	+	+
OIC	Service point code - 1	18	14301		7	14101	14103	14104	14105	14106	14107	14108	14110	14111	14112	14113	14114	14115	14170						11113		11113		11001	111101	11121	11102	11103	67111	11119	11105	11124	11106	11130	11107	11108	111128	11110
he service point	Manner of securing t	17	8	-	-	œ	∞ ∞	8		∞		٥	> ∞	•		8	S	æ	3			9	0	9	9		9 9		1			(×					4		10	c	0	10
notistu	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	- (Tmavac)	define distance	Stauton distance		station distance		station distance	station distance		station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance
	acceptance of the longest trains	15	2 and 3	1	5	7 and 3		1 and 2		2 and 3	1	C paid	2 and 3			2 and 3	and 3	2 and 3	1 and 2				Šimilija	p	2	1	2	٠,	3				1 and 2			ŀ		3	Н	2 and 3	5	z and z	3
Direction B→A	train length Tracks for	4	819 2 8	1	\neg	249 28	+		Н	\neg	+	+	10	1			2	2			e juncti		- L		8	_	. 8	vo Polje)1		+	\neg	564 1 8	+		H		51	Н		_	_	583
	longest trains Maximum permitted	1	\vdash	-	+		-	2 364	Н	3 721	+	113	+	+		3 329		Н	2 429	-	pen lin	-	Hion 1	T"	618	Vactor	618	- Kosov	601	_	_	-	+		+	-		661	Н	3 585	+	2 480	58
Direction A→B	Tracks for acceptance of the	13	2 and 3		,	7 and 3		1 and 2		2 and 3		1 and 3	2 and 3			2 and 3	2 and 3	2 and 3	1 and 2		 Open line junction "3" - Open line junction "1" 		(Barlows) - Caroline imedian 1" - Fursumlii		2	222 Viuršimlija - Vastrat	2	Doljevac - Kastrat - Kosovo Polje	4			,	1 and 2					3		2 and 3		C DIE 7	3
Dieseline	Maximum permitted train length	12	819		5	549		364		721		1.5	547			329	583	613	429		unction		- onen 1	n lado -	618	22 Vurè	618	jevac -	009			;	564					199		585	9	400	583
bermitted speed	Left track	11		65									40								en line	40	ordoro)	11000	20	c	7 07	223 Do						30	3								
Maximum	Right track	10		-																	ç					1		2															
6	Railway line categor	6	ප	ខ	8	3 8	පි	ខ	\mathfrak{S}	ව	8	3 3	3 8	3 8	8	ප	\mathfrak{S}	\mathfrak{S}	ខ	ខ	gotina)	3	331	77	A	A	A	¢		B1	B1	B1	B1	B1	B1	H 1	B1	B1	A	А	A .	4 4	; A
	Class of railway line	8	씸	~	24	× ×	2	R	В	ĸ	~	<u>م</u> ا	4 2	4 2	4	æ	R	~	R	R	220 (R	þ	4		R	~	2	4		ĸ	ĸ	<u>ط</u> ا	× ,	× 0	4 24	4	4	24	ĸ	R	24	4 0	4 24
ıne	Single/double-track l		σ2	22	\neg	2 0	+	-		22	\neg	20 0		+	+	1		Н	202	S	22	ō	2	r	Ω	1	V.	2		22	22		1	20	+	+			22		\neg	+	2 02
				+	4		1				-	_		1	-			Н								4	-	-				+	+			₽	-	\vdash	Н				
	Type of service point	9	-	9	9 .	٦ ٣	ν ε	1	3	-	0	<u>د</u> ا	4-	4 60	3	10	1	П	1		ļ	9 4	2	9		4	1 9		1	3	3	e ,	- '	n (, w	, "	, 60	-	3	∞	e -	7 6	000
	rvice point																		A								X ASTRAT	TOTTOW												A			
	Name of service point			000 OPEN LINE JUNCTION 2	_	631 TKNAVAC 533 ČOKONIAR		196 TABAKOVAC	764 TABAKOVAČKA REKA	656 BRUSNIK	148+460 TAMNIČ	151+330 CRNOMASNICA		192 VELIKOVO		167+850 KOBIŠNICA	128 NEGOTIN		578 PRAHOVO PRISTANIŠTE	185+079 END OF LINE		0+000 OPEN LINE JUNCTION 3	439 OFEN EINE JOINCILON	334 OPEN LINE JUNCTION 1	55+894 KURŠUMLIJA	56+363 END OF LINE	0+000 KURŠUMLIJA 2+320 OPEN I INF ITINCTION KASTRAT	STORES CHARLES	0+247 DOLjEVAC	3+300 ŠAJINOVAC		6+597 JASENICA	_	11+000 ZITORAĐA CENTAR	14+700 LUKOMIR	225 PODINA		327 PROKUPLE	25+014 GORNJA DRAGANJA		500 BRESNIČIČI	3/+844 BELULJIN 40+700 TOPI ICA MIT AN	42+718 PLOČNIK
	Distance in km Chainage					3 902 128+533	_				_	2.870 151+330						ш		0.501 185+0		0+0		53+5		0.469 56+3	3300 0+6		7+0	3.053 3+3			\perp	1.700 12+700									2.018 42+7
transport			1	7	0	7 6	, 12	4	7	9	7	7 5	1 6	, (4	9	7	2	0		c)	F	2	9	-	4		3			2	2 -	2		12	_د	7	9	7 7	.) .	7
public	Left track	2							1914.											-													28.02.	25.					04.12	1929		04.12.	29.
Date of handover to	Right track	1							19														I										28.	1925.					2	5 2	1	04.	19



	əbutitle	30	313.6		Ī				381.4	430.4		500.9						84.2	84.9	84.5	85	7./8	89.5	88.2							113.2	109.2	110.3		75.9					9	23.1	70.5	5.67	81	1
	Loading gauge	59	ŽS-I	ZS-1	ŽS-I	I-S	ŽS-I	ŽS-I	ŽS-I	ZS-I ŽS-I	+	ŽS-I	ŽS-I	7c.1	1-0				ŽS-I	ŽS-I	ZS-I	1-87 ŽS-I	ŽS-I	ŽS-I							0.00		1-87			ŽS-I		-	ŽS-I	ŀ	ļ	1-87	7c.1	Į-SŽ	
the line [daV]	←	28	NN PI	N PLN	A PLN	- 2	Σ	Ž	Z	N PL	IPIN	- Ž	PLZ PL	7 20	1				2	+	9	7 12	╀	1 2							-	ر ا	1		F	, N		-	3 2	ŀ	7	7 100		+	1
Ruling resistance of	\rightarrow	27	П	T		7			1	10		15	,	15	1				2	7	00	_	-	1							,	7	1			S.			╗	Ī		v	0 =	-	1
gradient	Slope	26	0	0 0	0	0	0	0	0	0 0	0	0	_	0 0					2	2	9	۲	'n	1							,	ç]			0			3			c	0	0	1
RulinA	hadine	25		s v	9	5	7	7	4	∞ ∞	100	7 15	16	14	3			0	0 2		2	~		3 1	8							7	4			4		L	0		5		4 6		-
[0%] u	Gradient of the statio		2.0			0	0	0		1.4		1.						0.0			0.5	1 8		0.3								7.7						-	Ц	-	2.0	70	3.0		J
sn	Minimum curve radi	23	500	300	250	300	300	300	300	300	300	400	300	300	200					200	500	200	450	700			F.				-	300									-	300	300	009	-
	Open for the accepta dispatching of passer operations	22	Ь	Д	4		Ь	Ь	Ы	ᆈ	. 4	Ь	Ы	۱										P/F			E V				P/F				ш		ပ				A G	P/4	I/I		
	Occupancy of service	21	n	t	n	U	H		n	Þ	+	Ω	+	t	1			T	U	D	Þ	11		Ъ			IOI	3		8	d ;)			T	H	TRAFFIC	F		1	4	+)	o p	1
	Side-\end-loading pl			ı	ı				Ω	v.	+		1	1	1		l	Ω					T	S/E			FVD				S/E							T		H	22	_	2 0	_	Н
	Freight car scales	19		ı	İ					t				1			l					İ	t	Yes			TOT	3									2	L		İ		1	İ	I	
DIC	Service point code -	18	11111	111126	71117		11122	111125	111115	111127	11123	11117	11120	11118				23306	24202	24203	24204	24205	24207	25550			PAIT MAY TIME OUT OF EXPLOYED	00 71			23450	24313				100	CLOSED FOR				23001	23002	23004	23005	
he service point	Manner of securing t	17	8	t	9	9		Н	8	000	+	8	T	\dagger				1	7	7	7	,	+	_			100	i			_	10	-010		10	91	LINE	7	7	H	-	2 2	_		4
noitslu	Manner of traffic reg	16	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	station distance	Station distance	ica)**)	SERVICE		station distance	station distance	station distance	station distance	station distance	station distance			DAILE	N TIPOT				station distance	Station distance	- (Kać)		station distance	S L C3 - Onto Ine inction 1" - One line inction 3" - (Porthara)	(Tamoma 1) - C	station distance		4.6	station distance	station distance	station distance	
	acceptance of the longest trains	15	2	t					7	2 and 3		2		t		- (Drer	TRAIN	3 and 4	2 and 3	2 and 3	2 and 3	2 and 3	2	2 and 3							and 3	1 and 2			1 and 2	П	ction .		П		2 and 3	C P	1 and 2	2 and 3	
Direction B→A	Llacks for			1						_	+	53255		1	**,	ion 1	EDI	7.1			_	_	1	-		ķ				ca		- T	- E	innet	1 a	$\overline{}$	ne inn	1	Ш			_	_		7
.,,,,,,,,	Maximum permitted train length		410						557	565		493			19 - D	iunct	ENDED	938	464	452	738	509	424	403		fabril				bolni	594	37/	INT	n line	445		nen lii			Zabali	228	263	203	278	
	longest trains	10000		Ť	Ī		П		1	d3			T	Ť	Probi	n line	SUSE	d4	d3	and3	d3	7	3	d3	NES	otica				ootica	and 3	7 D	Since	- obe	d2				Π.	evi -	63	c	707	3 5	1
A→B	scceptance of the Tracks for	13	7						7	2 and 3		2			. A.	obe -	ILY	3 and 4	2 and 3	2 an	2 and 3	2 and 3	7	2 and 3	AL LJ	- Sut				- Sut	2 an	I and 2	Ložić	1,33	1 and 2		.u		3	šanč	2 and 3	-	2 and 2	2 and 3	١
Direction	Maximum permitted train length		410				П		557	565		493		T	o Dol	eretna	ORAE	943	464	492	738	309	424	403	LOCAL LINES	Subotica - Subotica fabrika				Subotica - Subotica bolnica	594	27/	Novi Sad Ožonica LINE CLOSED	inctio	445		innet			306 Rimski šančevi - Zabal	558	243	303	278	
pəəds	Left track				<u> </u>										22.4 Kosovo Polie - Metohiia - Deć	Polie T	TEMP									301 Su				302 St			- (2	n line i			Den lin			306					1
Maximum permitted	Right track	10							•						224	Kosovo Polje Teretna - open line iunction 1 - (Drenica)***	rbas - Sombor TEMPORARILY				1						3)						0.1+042)			8	- evi) - o	9	₽			•		r	
Á	Railway line categor	6	A.	4	4	A	A	A	Ą	Y Y	A	Ą	Y.	∢ <	4	222. K	S-Sec		C	S	A	4 A	; V	A		Ī	3	3 8				Y .	Sad dem 1	304 Podbara		8	S		8	İ		4	₹ <	t 4	1
	Class of railway line	8	24	24 24	4 24	R	Я	R	씸	24 22	2	2	2	<u>م</u> ا	4	225	>		Я	M	24 6	۲ p	4 24	R		1	F	1 11			,	٦,	1.5	3041	Г	ij,	L imsk		IJ	İ	H	٦,	٦ ۲	111	1
əui	Single/double-track l	7	Ω.	ω v	2 02	S	Ω	S	S	w w	+	Ω	\pm	20 0	2		226		_	ß	_	20	+	+		1	ō	2 02				20 0	303 Ng	CO		SO CO	2050		SΩ	Ī	Ţ	20 0	20	2 02	1
1	Type of service poin	9	∞ (n "	9	9	3	3	10	e -	, m	∞	е,	2 0	2			1	1	-	- ,	2 -	10	1		-		-				-	1		-	9	9	6	9	-		× -	- -		
	oint					AT																																							
	Name of service point	Ш	46+646 BARLOVO	49+300 NOVOSELSKE LIVADE 42+000 PEPET FVAC	53+334 OPEN LINE JUNCTION 1	OPEN LINE JUNCTION KASTRAT	VISOKA	UŠA	RUDARE	67+325 DESISKA 69+880 KOSANIČKA RAČA	KOSANICA	KOSANČIĆ IVAN	79+000 VASILjEVAC	83+057 MERDARE 84+400 ADMINISTR ATRIE I INE	MINISTRATIVE LINE			UBAS	ЛДА	CRVENKA	VAC	05+700 NOVI SIVAC	79+695 CONOPLIA	89+710 SOMBOR			0+000 SUBOTICA	SOBOTICA PARAMA	³⁾ up to km 002+330 maximum permissible speed is 20 km/h		1+255 SUBOTICA	BOILCA BOLNICA	4+000 END OF LINE		4+413 IIOJEAPA	6+582 OPEN LINE JUNCTION 3	EN LINE JUNCTION 2	PEN LINE JUNCTION 1	0+910 OPEN LINE JUNCTION 3	>	10+270 RIMSKI SANCEVI	BACKLJAKAK	19+734 LEMEKUN	ABALj	
	1	Н	546 B.	00 N	34 5		IV 00	60+800 LjUŠA	310 RI	825 DI	1 1 1 1 1 1 1 1	395 KC	200	00 AT	200			37+137 VRBAS			62+676 SIVAC	3 5	2 S	710 SC		ŀ	15 SO	30 6	ssible sp		355 ST	3 8	JON EL		13 IIC	10 28	0 60	10 OO	10 OI		20 K	<u>a</u> ₽	7 3	34+016 ŽABAL	
	Chainage	4	46+6	49+300	53+3							75+895	79+0					37+1	47+6	54+971	62+6			2000					um permis		1+2				4+4			9+0							
	Distance in km	3	3.928	2.654	1.334	1.521	4.245	1.700	2.010	4.515	3.820	2.195	3.105	1 343	1.040				10.516	7.318	7.705	3.024	4.255	10.015		13	3 700	2.431	30 maxim			2.345	0.400			2.169	1.077		0.910		0	2 068	7.621	170.7	1
public transport	Left track	2		.90.90	1930.				_1	O5.	1949.	Ц							!		21.12.	1900.	_	1		-	08.01.	1885.	km 002+3								1	-	01.03.1969.	-		02.07.	1899.		1
Date of handover to	Right track	-		90	19					15.05.	19									- 19	21	ET I					08	18	3) up to										01.03			02.	18		



a	obutitlA ;	30	137.7	140.1	147.7	П	t	1/2	77	77	82.5	83.1		I	101.7		167	193.4	245.9		271.5	T	Ì	101	101	107	73	72	89,5	89,5	I	,	101		80	T	Ī	Ī		П
ම සිනාසි සි	Loading	+			7.S-I	ł I		ŽS-1	ŽS-I	ZS-I	-	ŽS-I		_	1-SZ ŽS-1	ŽS-I			ZS-I	ŽS-I	ŽS-I	1-0			ZS-I	1-0	ŽS-I	ŻS-I	ŽS-I	ŽS-I		,	I-SZ		j.	ZS-I				ZS-I ŽS-I
the line [daN]		28	Н	+	3 3	1	-	T	5 Ž	Z	-	13 Ž		-	4	Z	×Z×	Z ×	7 2	Ž	. N	7		H	+	2 %	4 7 7	H	4 Ž	Z		P	Z		31<	7			_	9 Ž
Fuling resistance of		27	H		v v	11			7			10	6 3	_	4	F	∞	_	11		18	1		Ħ	+	•	9	T	9										\vdash	
Ruling gradient		25 26	П	-	4 4		ļ		1			10 10			3		0 8	+	10 0		16 0				+	5	3	+	5 4							0 0			\vdash	» 0
n of the station [%]		24 2	0.0		0.0	1	3 0	0.2	2.0	8.0	0.0		8 (3		1.9		0.0				0.0			2,5		C1,2	2.48		2,0	1,5		,	2.5							
ım curve radius	uminiM ;	23		700	700			300	300	250		300	95		338	500	009	009	400	400	230	7007		280	300	870	300	464	300	300					900	800				
or the acceptance and ning of passengers/freight ans	Open to dispatch operatio	22		į	P/F		Đ.	P/F	Ь					P/F	Ľų			Н						P/F								į	P/F F		P/F				H	저
ncy of service point	10.10	21	P	,	4		۴	٦,	Ъ				6 3	Ы	ы		Þ	H	þ		Þ			Ы	İ	ľ	E		n				D U	l	Ъ				Ъ	
mrottslq gnibsol-br	:Side-/er	20					C	2						Ω	S			Ω	Ø		Ø			S/E					S		1	F	S/E		S				ω	
cst scales	Freight	119	П				L		Ш												Ц]		Yes					Ц		1		Yes		Д	1				П
point code - UIC	Service	18		16316	16317		10010	16014	21101					13404	13901	13903		13905	13906	13908	13909			21009	10010	21302	21303	21304	21305			00000	21009		22850				16203	16205
ot securing the service point	Manner	17	3		4 4				4];	1	1		-	9			9	9		9]		7			6		6				7		,	10			-15	10
. of fraffic regulation	і уувине.	9 10 11 12 13 14 15 16 16 16 18 19 16 19 19 19 19 19 19		station distance	station distance			station distance	station distance	station distance		station distance			station distance	station distance		station distance	station distance	station distance	station distance	stanon distance			station distance	station distance	station distance	station distance	station distance	station distance				3)	1 - 1 - 1 - 1 - 1	station distance	THU CHILD		4 1	station distance
nce of the		15 Ina - Zvo			2 and 3		TCa	2 and 3	3 and 4				- (Resavica)	5	6			3	7		4			4 and 5			1 and 2		2 and 3				4 and 5	 Metanolsko sirćetni kompleks (km 6+413) 	2 and 3	an A Stati	404 Paradin - Stari Ponovac I INF CT OSED FOR TRAFFIC		3	П
HODA HOT	Maximu train len Tracks f	14 In Bor			398	170110	309 Pancevo Varos - Pancevo vojiovica	200 2 and 3	174 3 and 4	- ding	100		ovac - (I	812	299			790	764		206	**	cva	3			753 1	+	681	١,	2	Vasariste	643	mpleks (842 2	OSED	SED F	čmen	733	Ħ
nce of the trains	longest	13 TON D			2 and 3	-	Fancev	2 and 3	3 and 4	Conto: (Color) innotion point	Jamer		Svilajnac - Despotovac	4	3			3	2		4	312 Metohiia - Prizren **)	313 Vršac - Bela Crkva	4 and 5			1 and 2.		2 and 3		SHUNTING LINES	જ્ર⊢	4 and 5	ćetni ko	2 and 3	INF. C	3 1 4 7	405 Surčin - Jakovo Bečmen	3	T
Direction	train len Tracks t	2 JUNCT	Н	+	398	× 70 m 0 %	varos -	2000	174 33	(Čolra)	- Cond		ilajnac -	855	299			790	764		506	etohiia	Vršac - J	643 4 8	+	+	753 1	+		-	NILVO ,		643 4 2	olsko sir	842 2 :	- ohala I	Oxiac I.D	čin - Ja	733	\mathbb{H}
ck speed		II N		- 1	ř	- 3	ancevo	ñ	1	- Conto	_	L		86	ŏ	-		27	76		Š	312 M	313	9			1		681	-		401 Vr	ő	Metano	8	mayska	ari Pon	405 Su	7.	
bermitted	20038	10 1 - OPE		20	4	000	309 F		20	the etation	orange at	40	Markovac -			20				1							30						20	Kikinda -	40	ievn - D	aćin - Si			07
Vine category	Railway	9 Fasina		₹.	V V		F	D2.	D2	D2		A	311	i	B2 A	A	Ą	¥.	4 4	Ą	¥ .	¥.			۷,	∢ <	(⊲	A	A	A		ŀ	C	402 K		A	4 Par		_	A A
frailway line			s I	J,	1 1		-	-	1			L	8 0		7 2	ī	ı	ı	11	r	1.	1		3	7,	1 -	1 -	r	r	n		t	man		H	man 403	A			man
double-track line		303	\vdash	\pm	N N	11	-	V.	ſΩ	S		W	8 3	1	v v	S	Ω	S	N N	ß	02 0	2			S S	20	2 0	S	S	S	1	-	S			S				N N
service point	3 7 3	9	9	ε,		H		- "	H	310 Compositing	12			1		3	1	1	1 3	3	-	1		-	9 0	0 0	+	+	1		1	-	1 2		1	-			-	_
			320		t	11	-	T	Ħ	210					100		H	1			Ť	1		Ħ				1000	H			F		lt	Ħ	1				Ħ
	Name of service point	\$5	68+685 OPEN LINE JUNCTION DONJA BORINA	70+600 RADALj	73+454 ZVORNIK 75+300 ZVORNIK GRAD	nissible speed is 10 km/h	South transmission	U+308 PANCEVO VAROS 1+300 PANČEVO STRELIŠTE	4 PANČEVO VOILOVICA	3+475 END OF LINE	7 JUNCTION POINT 22 SENTA	39+164 JUNCTION POINT 23 SENTA		0+500 MARKOVAC	SVILAINAC	23+200 RESAVSKO JASENOVO	0 RESAVA	0 DESPOTOVAC	0 VOJNIK 44 DVORIŠTE		53+360 RESAVICA	O END OF LINE		6 VRŠAC	44 OPEN LINE JUNCTION B JASENOVO	9/+203 POTPOKAN)			7 BELA CRKVA	121+500 END OF LINE		\(\frac{1}{2}\)	0+558 VRSAC 3+415 VRŠAC VAŠARIŠTE		0+000 KKKNDA	S MSK (INDUSTRIAL TRACK)			12+100 SURČIN	15+500 JAKOVO-BECMEN 16+500 END OF LINE
		4	89+89		1.846 75+300	xim	9310	0.732 1+30		0.561 3+47	38+40	0.757 39+16			7 568 17+500		8-9		1.580 36+400 6.164 42+564		7.560 53+36			87+546		8+399 9/+/03			4+418 119+067	2+433 121+50			2.857 3+41			6.285 6+28				3.400 15+50 1.000 16+50
110qsma11	Distanc					74+000 th		C	Ĭ	0		0.3		-	9,1	5.	4	7.	1.9	3.	1, 0				+	+ o	4	7+	Ш	2+			2.8			0.				, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,
or isolonish	Fight tra	1 2		15.05.1950.		4) up to km 07.		=	1935.					01.09.	1951.	29.11.	1951.			1967.					20.07.	1858.			01.11.1856.											



	annuu z												
	əbutitlA							u			8 - 10 11 - 13		Q
[.mn] avvv avv	Loading gauge							24					
resistance of the line [daN]	←	28						13		3	S-01		
RulinA	\rightarrow	27						9		-	_		
gradient	Slope	26									91 - 50		
Ruling	Incline	25						9					
[0%] u	Gradient of the statio	24						3			8 6	2-0	
st	Minimum curve radio	23											
	Open for the acceptar dispatching of passer operations	22							Ь	Ь	P		
	Occupancy of service	21						3	T	n	T		
	Side-\end-loading pla	20									10.00	-	
turogge	Freight car scales	19 2						1			yr 20	_	
	seleon ren tdnieri	1						ä	_	_	-		
	Service point code -	8.58						12					2
he service point	Manner of securing t	17						u			8 - S		2
noñslu	Manner of traffic reg	16	mska Rača Nova - state border - (Bijeljina) LINE CLOSED FOR TRAFFIC	TIC	FIC	VEFIC		rad)		station distance	station distance	station distance	
	longest trains		SOSI	RAI	RAI	TR.		/išeg					
B→A	acceptance of the	15	ECL)R T)R T	₹OR	RE	2					
Direction	train length Tracks for	H	Ę) FO	FC	D.F	Y LI	rder			-	-	
	Maximum permitted	14	na) I	SEL	SEL	OSE	WA	e Bo					
	longest trains	H	jeljii	CLO	CLO	CL	AE,	State			-		
or v	acceptance of the	13	Bi	NE	NE (Ž	TR	ra -					
Direction A→B	Tracks for		der.	a LD	a LD	raI	RIS	8					
,u	Maximum permitted train length	12	ate bor	a Skela	Fabrika	Gajdob	MUSEUM-TOURIST RAILWAY LINE	Mokra					
permitted speed	Left track	11	ova - st	Padinsk	Apatin	lanka -	USEUN	Vitasi -		30	Ö	20	
mumixsM	Right track	10	Sača No	407 Ovča - Padinska Skela LINE CLOSED FOR TRAFFIC	408 Sonta - Apatin Fabrika LINE CLOSED FOR TRAFFIC	109 Bačka Palanka - Gajdobra LINE CLOSED FOR TRAFFIC	MI	501 Šargan Vitasi - Mokra Gora - State Border - (Višegrad)		3		2	
A	Railway line categor	6	ska I	407	408	9 Ba		501		8 6	H (8)		
	Class of railway line	8	Srem	7	7	40							
aui	Single/double-track l	7	406 Šid - Sre					23		S	S	S	
	Type of service point	9	406					1	1	2	1	13	
	, e, e e e e e e e e e e e e e e e e e							13				_	
	Name of service point	s						133	2554+706 ŠARGAN VITASI	262+262 JATARE	270+146 MOKRA GORA	276+951 STATE BORDER	*) Distance in km between the service points is not equal to the difference of their line km positions
	Chainage	4							254+706	-3	0.0		the service po
	Distance in km	3								7.556	7.884	6.805	n between
public transport	Left track	2						3			. 41	<i>2</i> 30,	ce in kr
Date of handover to	Right track	1) Distan.
y - 1- U				\perp	_			_	ш				*

**) The lines on the territory of Kosovo and Metchija are temporarily under the supervision of UNMIK, according to the Temporary Agreement between ZTP Belgrade and UNMIK railways, dated May 31, 2002 (records No 300/2002 - 153 dated May 31, 2002). State border
 Track transition

Speed thange
 Dispatching point and stop
 Traffic and transport dispatching point
 Loading point

Train recording point and stop 3. Stop
4. Open line junction and train recording point
7. Open-line junction of train recording point
8. Loading point and stop
Column 10 and 11- damm referred to in brackets indicate maximum permitted speed for DMU

Col.17- Manner of Securing the service point

This contract of the service point

This contract of the service point

This contract of the service point

This contract of the service point

150

1. Electroctelay signaling-safety devices for comprehensive centralisation od tumouts, signals and routes. There is technical dependance between tumouts and signals.

2. Electro-ctay signaling-safety devices for partial centralisation od tumouts, signals and routes. There is technical dependance between tumouts and signals.

3. Electro-ctay signaling-safety devices - key dependance between tumouts, signals and routes. There is technical dependance between tumouts and signals.

4. Electro-ctay signaling-safety devices with dependance between tumouts and semaphore signals.

5. Electromentanical block device. There is technical dependance between tumouts and semaphore signals.

7. Mechanical signal pour machine. There is technical dependance between tumouts and semaphore signals.

8. Electromentanical permissive block device. There is no technical dependance between tumouts and semaphore signals.

Ordinary signal point for sem aphore signals.
 Electrical diffusers. There is no technical dependance between turnouts and diffusers.

11. Access signals. Turnouts are secured by locking devices without signal.

Col.20- S for the service point with side-loading platform, E for the service point with end-loading platform and S/E for the service point with side and end-loading platform

P for permanently manned, U for permanently unmanned and T for temporarily manned service points

Col.22.P for service points open for the acceptance and dispatching of passengers. T for service points open for the glat operations (loading, unloading and translationent of freight), and PT for service points open for the acceptance and dispatching of passengers. T for service points open for the acceptance and dispatching of passengers. T



Appendix 7. Overview of primary train delay causes

	Primary train delay causes (IŽS)
No	Name
1.	Waiting for dispatch
2.	Waiting at the automatic block signal or protective signal
3.	Dispatcher's order
4.	Delay caused by the fault of an infrastructure manager's employee
5.	Entrance/exit to a turn
6.	Traffic on the left track
7.	Speed decrease requested by the infrastructure manager
8.	Delivery of order to the train driver
9.	Unplanned line closure by the infrastructure manager
10.	Level-crossing failure
11.	Failure on the overhead contact line
12.	Extended stay of railway vehicles
13.	Delay caused by restricted-speed running
14.	Rail crack
15.	Deformed track
17.	Technically defective switch
18.	Collision, bumping, derailment, avoided collision of railway vehicles
19.	Failure of signalling-interlocking and telecommunication devices
20.	Extension of the foreseen closure (more than 30 min)

	Primary train delay causes (railway undertaking)
No	Name
1.	Increased passenger frequency
2.	Waiting for railway undertaking staff
3.	Waiting for locomotive or multiple-unit set
4.	Delay caused by the fault of an railway undertaking's employee
5.	Cleaning of wagon or multiple-unit set requested by the railway undertaking
6.	Brake test
7.	Failure of wagon, traction unit or multiple-unit set
8.	Wagon repair without de-coupling
9.	Decreased train speed due to failure of wagon/multiple-unit set/traction unit
10.	Change of composition requested by the railway undertaking

151



11.	Intervention of police officers, requested by train staff
13.	Waiting for shunting locomotive
15.	Shift change of railway undertaking's employees
16.	Waiting for train forming
17.	Weighing
18.	Special consignment transport
20.	Stopping for cooling of brake shoes
21.	Delay caused by turnover of the multiple-unit set/traction unit of the same composition
22.	Accident on industrial siding of the transport client
23.	Breakdown of brake system air duct
24.	Train passing by the signal which indicates that the further running is forbidden
25.	Unallowed train passing through the service point where it had to stop

	Primary train delay causes (external influences)
No	Name
1.	State needs
2.	Train accepted with delay by another railway management
3.	Train rejected by another railway management
4.	Waiting for train staff of another railway management
5.	Train incorrectly formed by another railway management
6.	Taking a defective wagon of another railway management out of service
7.	Taking an incorrectly sent wagon of another railway management out of service
8.	Another railway management's employee being late
9.	Natural disasters (landslide, flood, current, snow-drift, avalanche, fire, fog)
10.	Falling out of train
11.	Jumping in or out of train
12.	Holding of the train by police officers
13.	Holding of the train by custom-inspection officers
14.	Emergency brake abuse
15.	Emergency service intervention
16.	Level-crossing device breaking
17.	Train rocking
18.	Theft of equipment or devices owned by the infrastructure



	Secondary train delay causes
No	Name
1.	Waiting for crossing
2.	Waiting for overtaking of a train
3.	Waiting for annunciation
4.	Waiting with the train which is in delay
5.	Extended stay in the station due to waiting for regular passing
6.	Waiting for locomotive or multiple-unit set from turnover
7.	Waiting for railway undertaking's staff from turnover
8.	Delay caused by failure of another train's traction unit
9.	Waiting for train connection (passenger or goods) of another railway management
10.	Abuse of emergency brake on another train
11.	Announced strike of IŽS or RU
12.	Another train accident



Appendix 8 Overview of platforms and arranged surfaces in service points

		km position of the		Ī	Dimensions	
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
-		MAIN LINES	7		Ü	
	101 Belgrade Center- Stara		r (Tovornik)			
	next to 3rd track	0+120-0+00-0+300	platform	420.00	0.55	10.00
			I	420,00	0,55	10,00
DEL CD A DE CENTEED	between the 4th and 5th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
BELGRADE CENTER	between the 6th and 7th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
	between the 8th and 9th track	0+120-0+00-0+300	platform	420,00	0,55	10,00
	next to 10th track	0+120-0+00-0+300	platform	420,00	0,55	7,00
	next to 1st track	3+204,17 - 3+679,48	platform	475,00	0,55	5,60
	between the 1st and 2nd	3+204,17 - 3+679,48	platform	475,00	0,55	3,86
	track*	2 201 17 2 17 10	•	1== 00		10.11
NOVI BEOGRAD	between the 2nd and 3rd track	3+204,17 - 3+679,48	platform	475,00	0,55	10,46
	between the 3rd and 4th	3+204,17 - 3+679,48	platform	475,00	0,55	3,86
	track*		•			
	between the 4th and 5th track	3+204,17 - 3+679,48	platform	475,00	0,55	10,46
	next to 5th track	3+204,17 - 3+679,48	platform	475,00	0,55	5,60
Tošin bunar	next to right track	5+104,79 - 5+274,76	platform	110,00	0,55	4,00
1 OSIII Oullaf	next to left track	5+104,79 - 5+274,76	platform	110,00	0,55	4,00
	between the 1st and 2nd track	8+276 - 8+676	platform	400,00	0,55	6,16
	between the 3rd and 4th track	8+276 - 8+676	platform	400,00	0,55	6,16
ZEMUN	between the 6th and 7th track	8+321 - 8+676	platform	355,00	0,55	6,16
	between the 8th and 9 th track	8+321 - 8+676	platform	355,00	0,55	6,16
Altina	next to left track	11+256 – 11+366	platform	110,00	0,55	4,00
7 Hillia	next to right track	10+997 – 11+107	platform	110,00	0,55	4,00
	between the 1st and 2nd track	12+264 -12+374	platform	110,00	0,55	4,00
ZEMUNSKO POLJE	between the 2nd and 3rd track	12+154 -12+374	platform	220,00	0,55	6,16
	between the 3rd and 4th track	12+134 -12+374	platform	110,00	0,55	4,00
	next to left track	13+955 – 14+065	platform	110,00	0,55	4,00
Kamendin	next to right track	13+744 – 13+854	platform	110,00	0,55	4,00
	next to 1st track	18+884 – 19+104	platform	220,00	0,55	4,00
BATAJNICA	between the 2nd and 3rd track	18+884 – 19+104	platform	220,00	0,55	6,16
DATAJNICA			•			
NOVA DAZOVA	next to 6th track	18+884 – 19+104	platform	220,00	0,55	7,41
NOVA PAZOVA	between the 4th and 5th track	26+993-27+243 l.n.	platform	250,00	055	7,91
STARA PAZOVA	next to 1st track	35+015-35+235 l.n.	platform	220,00	0,55	3,00
	between the 5th and 6th track	35+015-35+265 l.n.	platform	250,00	0,55	6,16
GOLUBINCI	between the 2nd and 3rd track	45+767-45+914	platform	147,00	0,35	1,60
	between the 3rd and 4th track	45+767-45+914	platform	147,00	0,35	1,60
PUTINCI	between the 2nd and 3rd track	53+611,93-53+691,91	platform	79,98	0,35	1,60
	between the 3rd and 4th track	53+611,93-53+691,91	platform	79,98	0,35	1,60
Kraljevci	next to right track	59+982,18-60+062,18	platform	80,00	0,55	4,00
Tituljo (e)	next to left track	59+985,29-60+065,29	platform	80,00	0,55	4,00
	between the 2nd and 3rd track	64+733-64+973	platform	240,00	0,35	1,60
RUMA	between the 3rd and 4th track	64+733-64+973	platform	240,00	0,35	1,60
	between the 4th and 5th track	65+821-64+937	platform	116,00	0,35	1,60
VOGANJ	between the 2nd and 3rd track	73+368-73+518	arranged surface	150,00	0,00	2,00
VOGANJ	between the 3rd and 4th track	73+368-73+518	arranged surface	150,00	0,00	2,00
SREMSKA MITROVICA	between the 2nd and 3rd track	81+563-81+763	platform	200,00	0,35	1,60
SKLIVISKA IVII I KUVICA	between the 3rd and 4th track	81+563-81+763	platform	200,00	0,35	1,60
Laćarak	between the right and left track	86+109,30-86+159,30	platform	50,00	0,35	1,60
MADTING	between the 2nd and 3rd track	94+059-94+159	platform	100,00	0,35	1,60
MARTINCI	between the 3rd and 4th track	94+131-94+141	platform	10,00	0,35	1,60
Kuzmin		NONE	_			
	between the 2nd and 3rd track	104+935-104+985	platform	50,00	0,45	1,60
KUKUJEVCI-ERDEVIK	between the 3rd and 4th track	104+990-105+040	platform	50,00	0,45	1,60
Bačinci	next to right track	109+070-109+097	platform	27,00	0,35	1,60
Gibarac		NONE		· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·
	between the 1st and 2nd track	116+300-116+490	arranged surface	190,00	0,10	2,50
ŠID	between the 2nd and 3rd track	116+300-116+665	platform.	365,00	0,45	1,60
			r	,00	-,	-,50



Sarviga naint	Logotion	km position of the	Platform/arranged		Dimensions	Widtl
Service point	Location	beginning and the end of platform	surface	Length (m)	Height (m)	(m)
1	2.	3	4	5	6	7
1	between the 3rd and 4th track	116+300-116+677	platform	377,00	0,45	1.60
102 Relorade Cent	er– Junction "G" – Rakovica - M				,	1,00
102 Beigitude Celle	next to 3rd track	0+120-0+00-0+300	platform	420,00	0,55	10,00
	between the 4th and 5th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
BELGRADE CENTER	between the 6th and 7th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
BELGIU BE CENTER	between the 8th and 9th track	0+120-0+00-0+300	platform	420,00	0,55	10,00
	next to 10th track	0+120-0+00-0+300	platform	420,00	0,55	7,00
	next to 2nd track - right	8+460-8+786	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00	0,55	6,10
id into vieri	between the 5th and 6th track	8+545-8+865	platform	320,00	0,55	6,20
	next to right track	10+645-10+758	platform	113,00	0,55	1,55
Kneževac	next to left track	10+645-10+758	platform	113,00	0,55	1,55
	next to right track	11+626-11+731	platform	105,00	0,55	1,55
Kijevo	next to left track	11+713-11+819	platform	106,00	0,55	1,55
	next to 1st track	14+080-14+240	arranged surface	160,00	0,55	4,00
RESNIK	between the 1st and 2nd track	14+080-14+240	platform	160,00	0,35	1,55
RESIVIK	between the 3rd and 4th track	13+943-14+238	platform	295,00	0,55	6,20
PINOSAVA	between the 3rd and 4th track	NONE	platioilii	273,00	0,55	0,20
Ripanj Kolonija	next to railway line - left	20+080-20+180	platform	100,00	0,35	1,00
rapanj rominja	between the 1st and 2nd track	21+324,00-21+356,40	platform	32,40	0,35	1,00
RIPANJ	between the 1st and 2nd track	21+265,70-21+361,20	platform	95,50	0,35	1,55
KII ANJ	between the 3rd and 4th track	21+265,70-21+361,20	platform	95,50	0,35	1,55
	between the 1st and 2nd track	24+743,40-24+804,00	platform	60,60	0,35	1,00
KLENJE	between the 2nd and 3rd track	24+743,40-24+804,00	platform	60,60	0,35	1,00
RIPANJ TUNEL	between the 1st and 2nd track	29+565-29+615	platform	50,00	0,33	1,60
RII ANJ TONEL	between the 1st and 2nd track	34+695-34+774	platform	79,00	0,40	1,60
RALJA	between the 2nd and 3rd track	34+695-34+774	platform	79,00	0,40	1,60
SOPOT KOSMAJSKI	between the 2nd and 3rd track	41+454-41+544	platform	90,00	0,40	1,60
VLAŠKO POLJE	between the 2nd and 3rd track	47+684-47+784	platform	100,00	0,40	1,60
MLADENOVAC	between the 2nd and 3rd track	53+089-53+190	platform	101,00	0,40	1,60
WILADENOVAC	between the 3rd and 4th track	53+039-53+190	platform	160,00	0,40	1,60
	between the 1st and 2nd track	59+954-60+109	platform	155,00	0,40	1,60
KOVAČEVAC	between the 1st and 2nd track	59+907-60+056	platform	149,00	0,40	1,60
Rabrovac	next to railway line - left			136,00		
Rabiovac	•	62+909-63+045	platform		0,40 0,40	1,60
KUSADAK	between the 1st and 2nd track	67+497-67+650	platform	153,00		1,60
D 4	between the 2nd and 3rd track	67+453-67+600	platform	147,00	0,40	1,60
Ratare	next to railway line - left	70+821-70+931	platform	110,00	0,40	1,60
GLIBOVAC	between the 1st and 2nd track	73+941-74+041	platform	100,00	0,50	1,50
	between the 2nd and 3rd track	73+978-74+078	platform	100,00	0,50	1,50
DAI ANIIZA	between the 1st and 2nd track	78+476-78+586	platform	110,00	0,50	1,50
PALANKA	between the 2nd and 3rd track	78+476-78+586	platform	110,00	0,50	1,50
MATA DI ARTA	between the 3rd and 4th track	78+476-78+586	platform	110,00	0,50	1,50
MALA PLANA	between the 2nd and 3rd track	85+505-85+605	platform	100,00	0,50	1,50
	between the 1st and 2nd track	90+350-90+400	platform	50,00	0,40	1,60
VELIKA PLANA	between the 2nd and 3rd track	90+289-90+430	platform	141,00	0,40	1,60
	between the 3rd and 4th track	90+370-90+510	platform	140,00	0,40	1,60
	between the 4th and 5th track	90+360-90+464	platform	104,00	0,40	1,60
Staro Selo	next to right track	94+008-94+055	platform	47,00	0,40	1,60
	next to left track	94+008-94+055	platform	47,00	0,40	1,60
Novo Selo	next to right track	97+660-97+706	platform	46,00	0,40	1,60
	next to left track	97+660-97+706	platform	46,00	0,40	1,60
MADIZOTA C	between the 2nd and 3rd track	100+400-100+450	platform	50,00	0,40	1,60
MARKOVAC	between the 3rd and 4th track	100+350-100+452	platform	102,00	0,40	1,60
	between the 4th and 5th track	100+350-100+448	platform	98,00	0,40	1,60
Lapovo Varoš	next to right track	106+250-106+310	platform	60,00	0,35	1,60
1	next to left track	106+250-106+310	platform	60,00	0,35	1,60
Lapovo Marshalling Yard	next to right track	108+350-108+400	platform	50,00	0,35	1,60
I uid	next to left track	108+340-108+390	platform	50,00	0,35	1,60
	next to 1st track	109+460-109+510	platform	50,00	0,35	1,60
LAPOVO	between the 2nd and 3rd track	109+560-109+680	platform	120,00	0,35	1,60
	between the 3rd and 4th track	109+560-109+680	platform	120,00	0,35	1,60
Brzan	next to right track	114+140-114+190	platform	50,00	0,35	1,60



Service point	Location	km position of the beginning and the end	Platform/arranged	Length	Dimensions Height	Widt
Service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
1	next to left track	114+140-114+190	platform	50,00	-	1,60
			platform	50,00	0,35 0,35	1,60
Miloševo	next to right track	116+940-116+990	1			1,60
	next to left track	116+940-116+990	platform	50,00	0,35	
BAGRDAN	between the 2nd and 3rd track	120+229-120+330	platform	101,00	0,35	1,60
	between 3 rd and 4th track	120+268-120+390	platform	122,00	0,35	1,60
Lanište	next to right track	126+920-126+970	platform	50,00	0,35	1,60
Lambe	next to left track	126+920-126+970	platform	50,00	0,35	1,60
Bukovče	next to right track	131+229-131+279	platform	50,00	0,35	1,60
Burovee	next to left track	131+229-131+279	platform	50,00	0,35	1,6
	between the 1st and 2nd track	135+192-135+342	platform	150,00	0,20	1,9
JAGODINA	between the 2nd and 3rd track	135+122-135+364	platform	242,00	0,20	1,9
	between the 3rd and 4th track	135+182-135+416	platform	234,00	0,20	1,9
~!!!	next to right track	140+550-140+670	platform	120,00	0,55	3,0
Gilje	next to left track	140+550-140+670	platform	120,00	0,55	3,0
,	between the 3rd and 4th track	155+081-155+184	platform	103,00	0,35	1,60
PARAĆIN	between the 4th and 5th track	155+065-155+166	platform	101,00	0,20	1,9
	next to right track	163+560-163+610	platform	50,00	0,20	1,6
Sikirica- Ratari						
	next to left track	163+565-163+615	platform	50,00	0,35	1,6
Drenovac	next to right track	166+605-166+655	platform	50,00	0,35	1,6
	next to left track	166+605-166+655	platform	50,00	0,35	1,6
ĆIĆEVAC	between the 2nd and 3rd track	171+550-171+640	platform	90,00	0,35	1,6
CICEVIIC	between 3 rd and 4 th track	171+550-171+640	platform	90,00	0,35	1,6
Lučina	next to right track	173+625-173+674	platform	49,00	0,35	1,6
Lucina	next to left track	173+625-173+674	platform	49,00	0,35	1,6
	between the 2nd and 3rd track	176+222-176+425	platform	203,00	0,28	6,4
STALAĆ	between the 4th and 5th track	176+222-176+425	platform	203,00	0,28	1,6
	between the 6th and 7th track	176+270-176+378	platform	108,00	0,28	5,3
STEVANAC		NONE			-, -	- ,-
	between the 2nd and 3rd track	186+443-186+563	platform	120,00	0,35	1,60
BRALJINA	between the 3rd and 4th track	186+443-186+563	platform	120,00	0,35	1,6
Cerovo-Ražanj	next to railway line - left	190+320-190+370	platform	50,00	0,35	1,6
STARO TRUBAREVO	between the 1st and 2nd track	192+150-192+220	platform	70,00	0,35	1,6
STARO TRUBAREVO	between the 1st and 2nd track	194+882-195+003	platform	121,00	0,35	1,6
ĐUNIS			•			
	between the 3rd and 4th track	194+882-195+003	platform	121,00	0,35	1,6
Vitkovac	next to right track	199+160-199+210	platform	50,00	0,35	1,6
	next to left track	199+160-199+210	platform	50,00	0,35	1,6
Donji Ljubeš	next to right track	201+175-201+225	platform	50,00	0,35	1,6
Bonji Ljuoes	next to left track	201+175-201+225	platform	50,00	0,35	1,6
C	next to right track	203+560-203+610	platform	50,00	0,35	1,6
Gornji Ljubeš	next to left track	203+560-203+610	platform	50,00	0,35	1,6
110737137	between the 2nd and 3rd track	205+565-205+675	platform	110,00	0,35	1,6
KORMAN	between 3 rd and 4 th track	205+545-205+665	platform	120,00	0,35	1,6
	next to right track	208+087-208+186	platform	99,00	0,35	1,6
Trnjani	next to left track	208+087-208+186	platform	99,00	0,35	1,6
	next to 1st track	210+445-210+530	platform	85,00	0,33	5,0
ADDOUAC						
ADROVAC	between the 1st and 2nd track	210+432-210+521	platform	89,00	0,35	1,6
	between the 2nd and 3rd track	210+440-210+562	platform	122,00	0,35	1,6
ALEKSINAC	between the 2nd and 3rd track	214+067-214+277	platform	210,00	0,35	1,6
	between the 3rd and 4th track	214+067-214+277	platform	210,00	0,35	1,6
Nozrina	next to right track	217+400-217+500	platform	100,00	0,35	1,6
1 (OZIIIIa	next to left track	217+400-217+500	platform	100,00	0,35	1,6
I nžana	next to right track	218+705-218+790	platform	85,00	0,35	1,6
Lužane	next to left track	218+708-218+785	platform	77,00	0,35	1,6
m ×'	next to right track	222+062-222+164	platform	102,00	0,35	1,6
Tešica	next to left track	222+062-222+164	platform	102,00	0,35	1,6
· · · · · · · · · · · · · · · · · · ·	between the 2nd and 3rd track	224+656-224+758	platform	102,00	0,35	1,6
GREJAČ	between the 3rd and 4th track	224+656-224+708	platform	52,00	0,35	1,6
			platform	68,00	0,35	1,6
Supovački Most	next to right track	228+087-228+155	•			
-	next to left track	228+091-228+159	platform	68,00	0,35	1,60
Mezgraja	next to right track	229+306-229+416	platform	110,00	0,35	1,60
	next to left track	229+306-229+416	platform	110,00	0,35	1,60
	novt to right trook	232+544-232+631	platform	87,00	0,35	1,60
Vrtište	next to right track next to left track	232+544-232+631	platform	87,00	0,35	1,60



		km position of the		I	Dimension	<u> </u>
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width
		of platform		(m)	(m)	(m)
1	2	3	4	5	6	7
TRUPALE	between the 2nd and 3rd track	234+893-234+994	platform	101,00	0,40	1,60
CDVENI VDCT	between the 4th and 5th track	234+893-234+994	platform	101,00	0,40	1,60
CRVENI KRST	between the 2nd and 3rd track next to 1st track	240+842-240+994	platform	152,00 353,00	0,40 0,40	1,60 5,80
	between the 2nd and 3rd track	243+410-243+763 243+410-243+813	platform platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
1415	between 1b. and 1. track	243+643-243+763	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
MEĐUROVO		NONE	F	,	-,	
BELOTINCE	between the 1st and 2nd track	253+906-253+987	platform	81,00	0,40	1,60
Čapljinac	next to railway line - left	255+443-255+493	platform	50,00	0,40	1,60
Malošište	next to railway line - left	257+890-257+940	platform	50,00	0,40	1,60
DOLJEVAC	between the 1st and 2nd track	261+419-261+527	platform	108,00	0,40	1,60
DOLILVAC	between the 2nd and 3rd track	261+419-261+526	platform	107,00	0,40	1,60
Kočane	next to railway line - right	263+218-263+263	platform	45,00	0,40	1,10
Trocure	next to railway line - right	263+274-263+287	platform	13,00	0,40	1,10
Pukovac	next to railway line - right	265+833-265+862	platform	29,00	0,40	1,60
	next to railway line - right	265+870-265+897	platform	27,00	0,40	1,60
BRESTOVAC	between the 2nd and 3rd track	267+906-267+971	platform	65,00	0,40	1,60
Lipovica	next to railway line - left	270+819-270+844	platform	25,00	0,40	1,10
PEČENJEVCE	next to railway line - left between the 2nd and 3rd track	270+850-270+887 275+522-275+596	platform platform	37,00 74,00	0,40 0,40	1,10 1,60
Živkovo	next to railway line - right	278+820-278+865	platform	45,00	0,40	1,10
Priboj Leskovački	next to railway line - right	280+440-280+480	platform	40,00	0,40	1,10
VINARCI	next to fairway fine - fight	NONE	piationii	40,00	0,40	1,50
	between the 1st and 2nd track	287+460-287+679	platform	219,00	0,40	1,60
LESKOVAC	between the 2nd and 3rd track	287+507-287+630	platform	123,00	0,40	1,60
ĐORĐEVO		NONE	F	,	-,	
	between the 2nd and 3rd track	301+841-301+886	platform	45,00	0,40	1,60
GRDELICA	between the 3rd and 4th track	301+841-301+886	platform	45,00	0,40	1,60
Palojska Rosulja	next to railway line - left	308+614-308+629	platform	15,00	0,40	1,60
PREDEJANE	between the 1st and 2nd track	312+675-312+750	platform	75,00	0,40	1,60
DŽEP	between the 2nd and 3rd track	319+629-319+710	platform	81,00	0,40	1,60
MOMIN KAMEN	next to railway line - left	322+900-322+930	platform	30,00	0,40	1,60
Šelince		NONE	T			
VLADIČIN HAN	between the 1st and 2nd track	329+472-329+676	platform	204,00	0,40	1,60
SUVA MORAVA	next to 1st track	334+043-334+095	platform	52,00	0,40	1,60
Lepenički most Stubal		NONE				
PRIBOJ VRANJSKI		NONE NONE				
VRANJSKA BANJA	between the 1st and 2nd track	347+958-348+080	platform	122,00	0,40	1,60
	between the 1st and 2nd track	354+080-354+260	platform	180,00	0,40	1,60
VRANJE	between the 1st and 2nd track	354+125-354+242	platform	117,00	0,40	1,60
Neradovac	2000 Con the End and Sid tidek	NONE	Pantolini	117,00	5,10	1,00
	between the 1st and 2nd track	365+666-365+768	platform	102,00	0,40	1,60
RISTOVAC	between the 2nd and 3rd track	365+666-365+768	platform	102,00	0,40	1,60
BUJANOVAC	between the 1st and 2nd track	373+665-373+720	platform	55,00	0,40	1,60
Letovica		NONE		·		
BUKAREVAC		NONE				
PREŠEVO	between the 1st and 2nd track	392+256-392+357	platform	101,00	0,40	1,60
	103 (Belgrade Center) - Rako				, -	
	next to 2nd track - right	8+460-8+786	platform	326,00	0,55	6,10
RAKOVICA	between the 3rd and 4th track	8+637-8+868	platform	231,00	0,55	6,10
- · ·	between the 5th and 6th track	8+545-8+865	platform	320,00	0,55	6,20
JAJINCI		NONE	1 1 2	0= 0=	6 15	
BELO POTOK	between the 2nd and 3rd track	16+240-16+337	platform	97,00	0,40	1,60
	between the 3rd and 4th track	16+240-16+351	platform	111,00	0,40	1,60
Zuce staj.	next to railway line - right	20+305-20+363	platform	58,00	0,40	1,60
ZUCE	between the 1st and 2nd track	21+180-21+287	platform	107,00	0,40	1,60
VRČIN	between the 1st and 2nd track between the 2nd and 3rd track	24+824-24+932 24+824-24+934	platform platform	108,00	0,40 0,40	1,60 1,60
Kasapovac	next to railway line - left	27+840-27+938	platform	98,00	0,40	1,60
Kasapovac	neat to failway fille - left	∠1±0 1 U-∠1±330	piatioiiii	70,00	0,40	1,00



		km position of the		Т	Dimension	S
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
1		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
LIPE	between the 1st and 2nd track	31+208-31+316	platform	108,00	0,40	1,60
MALA IVANČA	next to 1st track	36+858-36+925	platform	67,00	0,40	1,60
	between the 1st and 2nd track	36+863-36+925	platform	62,00	0,40	1,60
Brestovi	next to railway line - left	39+208-39+305	platform	97,00	0,40	1,60
MALI POŽAREVAC	between the 1st and 2nd track	41+250-41+356	platform	106,00	0,40	1,60
D , . G ,.	between the 2nd and 3rd track	41+250-41+358	platform	108,00	0,40	1,60
Dražanj-Šepšin	next to railway line - right	43+114-43+219	platform	105,00 109,00	0,40	1,60 1,60
UMČARI	between the 1st and 2nd track between the 2nd and 3rd track	47+730-47+839	platform platform		0,40	1,60
Živkovac	next to railway line - left	47+730-47+837 52+290-52+340	platform	107,00 50,00	0,40 0,40	1,60
VODANJ	between the 2nd and 3rd track	55+130-55+229	platform	99,00	0,40	1,60
KOLARI	between the 1st and 2nd track	60+558-60+656	platform	98,00	0,40	1,60
Ralja Smederevska	next to railway line - left	66+573-66+605	platform	32,00	0,40	1,60
Tranja Sinedere visita	between the 1st and 2nd track	69+030-69+175	platform	145,00	0,40	1,90
NAME AND COME	between the 2nd and 3rd track	69+030-69+175	platform	145,00	0,40	1,90
MALA KRSNA	between the 3rd and 4th track	69+042-69+184	platform	142,00	0,40	1,90
	between the 4th and 5th track	69+080-69+230	platform	150,00	0,40	1,90
Skobalj	next to railway line - left	71+981-72+015	platform	34,00	0,40	1,60
Osipaonica staj.	next to railway line - left	74+749-74+784	platform	35,00	0,40	1,60
OSIPAONICA	between the 1st and 2nd track	76+168-76+231	platform	63,00	0,40	1,60
OSII AONICA	between the 2nd and 3rd track	76+177-76+229	platform	52,00	0,40	1,60
Lugavčina	next to railway line - right	77+867-77+904	platform	37,00	0,40	1,30
Saraorci		NONE	T		1	1
LOZOVIK-SARAORCI	between the 2nd and 3rd track	82+710-82+812	platform	102,00	0,40	1,60
Miloševac	next to railway line - left	85+500-85+602	platform	102,00	0,40	1,60
KRNJEVO-TRNOVČE	between the 2nd and 3rd track	90+248-90+348	platform	100,00	0,40	1,60
	between the plateau in front of the station building and 2 nd	04 + 626 50 04 + 659 50	mlatfarma	22.00	0.40	1.6
VELIKO ORAŠJE	the station building and 2 track	94+626,50-94+658,50	platform	32,00	0,40	1,6
	between the 2nd and 3rd track	94+586,50-94+689,50	platform	103,00	0,40	1,6
	between the 1st and 2nd track	90+350-90+400	platform	50,00	0,40	1,60
	between the 2nd and 3rd track	90+289-90+430	platform	141,00	0,40	1,60
VELIKA PLANA	between the 3rd and 4th track	90+370-90+510	platform	140,00	0,40	1,60
	between the 4th and 5th track	90+360-90+464	platform	104,00	0,40	1,60
	104 (Jagodina) – Open Lin	e Junction Ćuprija – Ćup		,		
ĆUPRIJA	between the 1st and 2nd track	0+516-0+641	platform	125,00	0,20	1,60
CUFRIJA	between the 2nd and 3rd track	0+516-0+641	platform	125,00	0,30	1,60
PARAĆIN	between the 3rd and 4th track	155+081-155+184	platform	103,00	0,35	1,60
	between the 4th and 5th track	155+065-155+166	platform	101,00	0,20	1,90
103	5 (Belgrade Center) - Stara Pazov		1		1	
STARA PAZOVA	next to 1st track	34+015-35+235 л.н.	platform	220,00	0,55	3,00
	between the 5th and 6th track	35+015-35+265 л.н.	platform	250,00	0,55	6,16
INĐIJA	next to 1st track	42+577 - 42+977	platform	400,00	0,55	4,10
BEŠKA	between the 4th and 5th track	42+577 - 42+977	platform	400,00	0,55	7,55
BESKA	next to 1st track next to 4 th track	53+922 - 54+142 53+922 - 54+142	platform platform	220,00	0,55	4,00 4,00
	between the 1st and 2nd track	53+922 - 54+142 65+759 - 65+979	platform	220,00	0,55 0,55	4,00
SREMSKI KARLOVCI	between the 1st and 2nd track	65+759 - 65+979	platform	220,00	0,55	4,00
	between the 1st and 2nd track	70+603 – 70+823	platform	220,00	0,55	6,10
PETROVARADIN	between the 5 th and 6 th track	70+708 - 70+928	platform	220,00	0,55	6,10
	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00
	between the 11th and 10th track	77+822-77+950	platform	128,00	0,40	3,72
	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20
NOVI SAD	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90
	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75
	between the 12th and 1st track	78+104-78+250	platform	146,00	0,40	8,90
	between the 14 th and 13 th track	78+104-78+249	platform	145,00	0,40	6,46
		110115				
SAJLOVO		NONE				
KISAČ	between the 1st and 2nd track	91+349-91+414	platform	65,00	0,33	1,40
KISAČ Stepanovićevo	between the 1st and 2nd track next to railway line - right	91+349-91+414 98+040-98+080	platform	40,00	0,35	1,60
KISAČ	between the 1st and 2nd track	91+349-91+414				



		km position of the		Т	Dimensions	
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
1		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the 3rd and 4th track	116+702-116+770,30	platform	68,00	0,35	1,40
LOVĆENAC	between the 2nd and 3rd track	128+098-128+158	platform	60,00	0,19	1,90
Mali Iđoš		NONE				
MALI IĐOŠ POLJE		NONE	, ,			
BAČKA TOPOLA	between the 1st and 2nd track	144+096-144+248	platform		0,15/0,40	1,60
	between the 2nd and 3rd track	144+093-144+241	platform	148,00	0,25	1,60
Mali Beograd		NONE	1			
ŽEDNIK	between the 2nd and 3rd track	157+792-157+862	platform	70,00	0,20	1,90
Verušić	next to railway line - left	162+950-162+985	platform	35,00	0,30	1,60
NAUMOVIĆEVO	between the 1st and 2nd track	166+144-166+214	platform	70,00	0,30	1,60
Aleksandrovo predgrađe	next to railway line - right	171+938-171+983	arranged surface	45,00	0,05	0,60
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
GLIDOTIC A	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
		GRAD - state border -(Dr		252.00	0.40	<i>5</i> 00
	next to 1st track	243+410-243+763	platform	353,00	0,40	5,80
NHČ	between the 2nd and 3rd track	243+410-243+813	platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
	between 1b and 1st track	243+643-243+763	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
Palilulska rampa	next to railway line - left	1+669-1+769	platform	100,00	0,40	1,60
	next to railway line - left	1+809-1+875	platform	66,00	0,40	1,60
Vojna Bolnica		NONE 5 . 422 5 . 522	1.6	00.00	I 0.40 I	1.60
ĆELE KULA	between the 2nd and 3rd track	5+422-5+502	platform	80,00	0,40	1,60
EI NIŠ		NONE	1.6	100.00	0.40	1.60
NIŠKA BANJA	between the 2nd and 3rd track	10+450-10+558	platform	108,00	0,40	1,60
Prosek	next to railway line - right	14+712-14+731	platform	19,00	0,40	1,60
CIÓTNO	next to railway line - right	14+740-14+770	platform	30,00	0,40	1,60
SIĆEVO OSTROVICA	h-t	NONE	1_4£	£4.00	0.40	1.00
	between the 1st and 2nd track	22+475-22+529	platform	54,00	0,40	1,60
Majdan Ostrovica Radov Dol	next to railway line - left	NONE 29+494-29+520	platform	26,00	0,40	1,60
DOLAC	between the 2nd and 3rd track	31+640-31+739	platform	79,00	0,40	1,60
Crveni Breg	next to railway line - left	34+262-34+292	platform	30,00	0,40	1,60
CRVENA REKA	between the 2nd and 3rd track	36+393-36+451	platform	58,00	0,40	1,60
Belanovac	next to railway line - left	39+691-39+761	platform	70,00	0,40	1,60
BELA PALANKA	between the 2nd and 3rd track	44+907-44+977	platform	70,00	0,40	1,60
Crkvica	between the 2nd and 3rd track	NONE	piationii	70,00	0,40	1,00
ČIFLIK	1	NONE				
Sinjac		NONE				
Đurđevo polje	1	NONE				
Crvenčevo		NONE				
STANIČENJE		NONE				
Sopot		NONE				
-	between the 1st and 2nd track	72+901-72+989	platform	87,00	0,40	1,60
PIROT	between the 2nd and 3rd track	72+868-73+021	platform	153,00	0,40	1,60
Božurat	Serveen the 2nd and 3rd track	NONE	pianoini	133,00	0,70	1,00
Veliki Jovanovac		NONE				
SUKOVO		NONE				
	next to railway line - left	90+465-90+471	platform	6,00	0,40	1,60
Činiglavci	next to railway line - left	90+485-90+491	platform	6,00	0,40	1,60
Srećkovac		NONE	F-440-1111	5,00	٥,.٠	
	next to 14th track	97+126-97+267	platform	141,00	0,40	2,50
DIMITROVGRAD	between the 1st and 2nd track	97+316-97+717	platform	401,00	0,40	3,20
107	Belgrade Center– Pančevo Main		1		, , -	
23.	next to 3rd track	0+120-0+00-0+300	platform	420,00	0,55	10,00
	between the 4th and 5th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
BELGRADE CENTER	between the 6th and 7th track	0+155-0+00-0+300	platform	455,00	0,55	10,00
	between the 8th and 9th track	0+120-0+00-0+300	platform	420,00	0,55	10,00
	next to 10th track	0+120-0+00-0+300	platform	420,00	0,55	7,00
	·		· •			



Service point 1 Karađorđev park	Location 2 between the tracks (next to left Banat track) between the tracks (next to right Banat track)	km position of the beginning and the end of platform 3 1+123-1+215	Platform/arranged surface 4 platform	Length (m) 5	Height (m)	Width (m)
	between the tracks (next to left Banat track) between the tracks	3	4	5	6	. ,
	between the tracks (next to left Banat track) between the tracks					7
Karađorđev park	(next to left Banat track) between the tracks	1+123-1+215	platform	02.00		
Karađorđev park	between the tracks		piatioiiii	92,00	0,55	7,00
		-	_	· 	 	
	THE AT TO FIGURE DANIAL HEACK I	1+222-1+314	platform	92,00	0,55	7,00
	(next to right Bundt track)	2+754,13-2+829,13				
	h - 4 4h - 4 1	(chainage along the left)	11	75.00	0.05	10.70
	between the tracks	2+850,52-2+925,52	central platform	75,00	0,95	18,60
-		(chainage along the right)				
	between the tracks	2.705.52.2.050.52	lateral platform	65.00	0.07	2.50
	(next to right Banat track)	2+785,52-2+850,52	towards the Center	65,00	0,95	3,50
<u> </u>			lateral platform			
Vukov spomenik	between the tracks	2+925,52-3+010,52	towards the	85,00	0.95	3,50
	(next to right Banat track)		bridge		,,,,	-,
	between the tracks		lateral platform			
	(next to left Banat track)	2+689,13-2+754,13	towards the	65,00	0,95	3,50
_	(next to left Bullat track)		Center			
	between the tracks	2 . 020 12 2 . 014 12	lateral platform	05.00	0.07	2.50
	(next to left Banat track)	2+829,13-2+914,13	towards the	85,00	0,95	3,50
	next to 1st track	4+590-4+741	bridge platform	151,00	0,90	4,94
, , , , , , , , , , , , , , , , , , ,	next to 1st track	4+694-4+845	platform	151,00	0,90	4,94
PANČEVAČKI MOST			Danube	,		
	next to railway line - right	10+500-10+600	platform	100,00	0,35	1,60
Krnjača most	Between the left and right	7+003,50-7+223,50	platform	220,00	0,60	7,00
Kinjaca most	track	, , , , , , , , , , , , , , , , , , ,	•		· ·	
KRNJAČA	next to 4th track	8+165,06-8+385,06	platform	220,00	0,55	3,00
	next to 1st track	8+182,24-8+402,24	platform	220,00	0,55	3,00
Sebeš	next to left Banat track	9+975,05-10+085,05	platform	110,00	0,60	3,10
×.	next to right Banat track next to 1st track	9+975,05-10+085,05 12+537,60-12+757,60	platform platform	110,00 220,00	0,60 0,55	3,10 4,00
OVČA	between the 4th and 5th track	12+537,60-12+757,60	platform	220,00	0,55	6,10
	between the 1st and 2nd track	15+913-16+033	platform	120,00	0,40	1,60
PANČEVO MAIN	between the 1st and 2nd track	16+090-16+210	platform	120,00	0,40	1,60
STATION	between the 2nd and 3rd track	15+913-16+210	platform	297,00	0,40	1,60
	between the 3rd and 4th track	15+987-16+137	platform	150,00	0,40	1,60
	next to 1st track	18+131-18+223	station plateau	92,00	0,40	1,60
PANČEVO VAROŠ	between the 1st and 2nd track	18+105-18+345	platform	240,00	0,40	1,60
	between the 2nd and 3rd track	18+100-18+364	platform	264,00	0,40	1,60
BANATSKO NOVO SELO	between the 2nd and 3rd track	33+981-34+035	arranged surface	54,00	0,30	0,50
VLADIMIROVAC	between the 1st and 2nd track	45+806-45+906	arranged surface	100,00	0,00	1,30
	between the 2nd and 3rd track between the 1st and 2nd track	45+806-45+906	arranged surface	100,00	0,00	1,30
ALIBUNAR	between the 1st and 2nd track	53+503-53+603 53+503-53+603	arranged surface	100,00	0,00	1,30 1,30
BANATSKI KARLOVAC	between the 2nd and 3rd track	331303-331003	arranged surface	100,00	0,00	1,50
Nikolinci	and ord track	NONE	<u>. </u>			
ULJMA	between the 2nd and 3rd track	1.01(2				
Vlajkovac		NONE				
VRŠAC -	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
VINDAC	between the 2nd and 3rd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
10	08 (Belgrade Center) - Resnik -	Požega - Vrbnica - state bo	order - (Bijelo Polje	e)		
	next to 1st track	14+080-14+240	arranged surface	160,00	0,55	4,00
RESNIK	between the 1st and 2nd track	14+080-14+240	platform	160,00	0,35	1,55
	between the 3rd and 4th track	13+943-14+238	platform	295,00	0,55	6,20
BELA REKA	between the 1st and 2nd track	7+538-7+648	platform	110,00	0,35	1,60
Nenadovac	next to railway line - left	12+077-12+127	platform	50,00	0,35	1,60
BARAJEVO	between the 2nd and 3rd track	15+654-15+764	platform	110,00	0,35	1,60
Baralevo L'entar	next to railway line - left between the 1st and 2nd track	17+895-18+003	platform	108,00	0,35	1,60
Barajevo Centar	DELWEED THE 1ST AND AND TROOK	23+039-23+151	platform	112,00	0,35	1,60
VELIKI BORAK			platform	50.00	0.25	1.60
VELIKI BORAK Leskovac Kolubarski	next to railway line - right	27+720-27+770	platform platform	50,00	0,35	1,60
VELIKI BORAK			platform platform platform	50,00 110,00 150,00	0,35 0,35 0,35	1,60 1,60 1,60



		km position of the		Т	Dimensions	<u> </u>
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
r		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
LAZAREVAC	between the 1st and 2nd track	45+311-45+462	platform	151,00	0,35	1,60
LAZAREVAC	between the 2nd and 3rd track	45+311-45+462	platform	151,00	0,35	1,60
LAJKOVAC	between the 1st and 2nd track	52+547-52+697	platform	150,00	0,40	1,60
	between the 2nd and 3rd track	52+527-52+697	platform	170,00	0,35	1,60
SLOVAC	between the 1st and 2nd track	58+899-59+052	platform	153,00	0,35	1,60
Mlađevo	between the 2nd and 3rd track	58+899-59+052 63+958-64+035	platform platform	153,00 77,00	0,35 0,35	1,60 1,60
Miadevo	next to railway line - right between the 1st and 2nd track	67+043-67+213	platform	170,00	0,35	1,60
DIVCI	between the 1st and 2nd track	67+043-67+213	platform	170,00	0,35	1,60
Lukavac Kolubarski	next to railway line - right	69+165-69+265	platform	100,00	0,35	1,60
Iverak	next to railway line - right	72+725-72+825	platform	100,00	0,35	1,60
	next to 1st track	77+550-77+851	platform	301,00	0,35	5,4
VALJEVO	between the 2nd and 3rd track	77+562-77+863	platform	301,00	0,35	7,55
VALJEVSKI GRADAC	next to railway line - right	84+560-84+610	platform	50,00	0,35	1,60
Leskovice	next to railway line - left	91+605-91+655	platform	50,00	0,35	1,60
LASTRA	between the 2nd and 3rd track	93+985-94+131	platform	146,00	0,35	1,60
SAMARI	between the 2nd and 3rd track	103+118-103+168	platform	50,00	0,40	1,60
Drenovački Kik	next to railway line - right	107+700-107+750	platform	50,00	0,40	1,60
RAŽANA	between the 3rd and 4th track	111+284-111+430	platform	146,00	0,35	1,60
KOSJERIĆ	between the 3rd and 4th track	118+748-118+948	platform	200,00	0,40	1,60
Tubići	between the 4th and 5th track next to railway line - left	118+748-118+948 123+446-123+496	platform platform	200,00 50,00	0,40 0,35	1,60 1,60
KALENIĆI	between the 3rd and 4th track	129+772-129+918	platform	146,00	0,35	1,60
Otanj	next to railway line - right	133+600-133+710	platform	110,00	0,33	1,50
Glumač	next to railway line - right	135+807-135+863	platform	56,00	0,40	1,60
	next to 1st track	140+720-140+975	platform	255,00	0,45	10,00
POŽEGA	between the 2nd and 3rd track	146+675-140+984	platform	309,00	0,45	6,20
Rasna	next to railway line - right	145+618-145+650	platform	32,00	0,40	1,00
UZIĆI	between the 1st and 2nd track	149+125-149+255	platform	129,00	0,40	1,60
UZICI	between the 2nd and 3rd track	149+255-149+389	platform	134,00	0,40	1,60
Zlakusa	next to railway line - right	151+536-151+566	platform	30,00	0,40	1,60
Bukovička Rampa	next to railway line - right	154+141-154+161	platform	20,00	0,40	1,60
SEVOJNO	between the 1st and 2nd track	156+882-157+082	platform	200,00	0,40	1,60
UŽICE FREIGHT STATION	between the 2nd and 3rd track	161+795-161+995	platform	200,00	0,40	1,60
	between the 1st and 2nd track	161+813-161+953	platform	140,00	0,40	1,60
UŽICE	next to 1st track between the 2nd and 3rd track	163+645-163+900 163+626-163+881	platform platform	255,00 255,00	0,40 0,60	3,00 5,10
STAPARI	between the 1st and 2nd track	170+590-170+710	platform	120,00	0,40	1,60
	next to railway line - left	173+412-173+425	platform	13	0,40	1,60
Ristanovića Polje	next to railway line - right	173+426-173+464	platform	38	0,40	1,60
Tripkova	next to railway line - right	176+045-176+095	platform	50	0,40	1,60
SÚŠICA	between the 2nd and 3rd track	178+251-178+371	platform	120,00	0,40	1,60
	next to 1st track	185+181-185+291	platform	110,00	0,40	5,50
BRANEŠCI	between the 1st and 2nd track	185+181-185+291	platform	110,00	0,40	1,60
	between the 2nd and 3rd track	185+181-185+291	platform	110,00	0,40	1,60
ZLATIBOR	between the 2nd and 3rd track	193+234-193+404	platform	170,00	0,40	1,60
Ribnica Zlatiborska	next to railway line - left	200+350-200+400	platform	50,00	0,40	1,60
JABLANICA C-1-*	between the 3rd and 4th track	204-405-204+550	platform	145,00	0,40	1,60
Goleš ŠTRPCI	next to railway line - right	211+590-211+616	platform	26,00	0,40	1,00
Rača	between the 2nd and 3rd track next to railway line - right	214-755-214-900 219+515-219+536	platform platform	145,00 21,00	0,40 0,40	1,60 1,00
	between the 2nd and 3rd track	225+227-225+490	platform	263,00	0,40	5,10
PRIBOJ	between the 2nd and 3rd track	225+137-225+237	platform	100,00	0,50	3,00
Poljice	next to railway line - right	228+110-228+190	platform	80,00	0,40	1,60
Pribojska Banja	next to railway line - right	232+867-232+899	platform	32,00	0,40	1,00
BISTRICA NA LIMU	between the 2nd and 3rd track	241+208-241+352	platform	144,00	0,40	1,60
Džurovo	next to railway line - right	246+300-246+328	platform	28,00	0,40	1,00
PRIJEPOLJE	next to 1st track	252+396-252+705	platform	309,00	0,40	4,60
	between the 2nd and 3rd track	252+396-252+705	platform	309,00	0,40	7,00
PRIJEPOLJE FREIGHT	between the 2nd and 3rd track	255+789-255+982	platform	187,00	0,35	1,60
STATION	between the 3rd and 4th track	255+789-255+982	platform	187,00	0,35	1,60
Velika Župa	next to railway line - right	259+605-259+624	platform	19,00	0,40	1,00



	Ī	km position of the	<u> </u>	т	Dimensions	,
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
Service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
LUČICE	between the 2nd and 3rd track	264+581-264+714	platform	133,00	0,35	1,60
BRODAREVO	between the 2nd and 3rd track	273+255-273+404	platform	149,00	0,30	1,60
	between the 1st and 2nd track	285+205-285+255	platform	50,00	0,30	1,60
VRBNICA	between the 2nd and 3rd track	285+112-285+256	platform	144,00	0,30	1,60
109 La	povo - Kraljevo - Lešak - Kosovo	Polje – Đeneral Janković	- state border - (V	olkovo)		
	between the 2nd and 3rd track	109+560-109+680	platform	120,00	0,35	1,60
LAPOVO	between the 3rd and 4th track	109+560-109+680	platform	120,00	0,35	1,60
	next to 1st track	109+460-109+510	platform	50,00	0,35	1,60
BATOČINA	between the 1st and 2nd track	3+374,70-3+421,90	platform	47,20	0,12	1,30
Gradac	left side	8+243,40-8+292,90	platform	49,50	0,30	1,05
BADNJEVAC	between the 2nd and 3rd track	12+264,50-12+311,50	platform	47,00	0,14	1,80
Resnik Kragujevački		NONE				
Milatovac	right side	18+206,90-18+253,70	platform	46,80	0,33	1,10
Cvetojevac	right side	20+381-422,20	platform	41,20	0,25	1,20
JOVANOVAC	between the 2nd and 3rd track	22+308-22+352	platform	44,00	0,22	1,75
KRAGUJEVAC	between the 1st and 2nd track	28+726-28+918,70	platform	192,70	0,24	1,20
7 1	between the 2nd and 3rd track	28+752-28+907	platform	155,00	0,24	1,80
Zavod GROŠNICA	right side between the 1st and 2nd track	31+280,50-31+288,25 34+062,80-34+104,30	platform platform	7,75 41,50	0,10 0,22	0,50 1,50
DRAGOBRAĆA	between the 1st and 2nd track	39+529-39+565	platform	36,00	0,22	1,20
Vučkovica	right side	39+529-59+505 44+513-44+538	platform	25,00	0,20	1,20
KNIĆ	between the 1st and 2nd track	47+560-47+607	platform	47,00	0,30	1,40
GRUŽA	between the 1st and 2nd track	53+458-53+505,5	platform	47,50	0,30	1,40
GUBEREVAC	between the 1st and 2nd track	60+567-60+614	platform	47,00	0,20	1,55
Tomića Brdo	right side	64+795-64+822,50	platform	27,50	0,35	1,00
VITKOVAC	between the 1st and 2nd track	66+309-66+353	platform	44,00	0,25	1,25
Milavčići	left side	70+141,80-70+172,80	platform	31,00	0,35	1,40
VITANOVAC	between the 1st and 2nd track	73+904,30-73+948,70	platform	44,40	0,22	1,40
Šumarice	left side	79+111-79+128,4	platform	17,40	0,25	0,50
Sirča	right side	82+006-82+069	platform	63,00	0,35	1,90
VD AT IEVO	between the 1st and 2nd track	84+649-84+733	platform	84,00	0,33	1,60
KRALJEVO	between the 2nd and 3rd track	84+649-84+748	platform	99,00	0,33	1,60
MATARUŠKA BANJA	between the 2nd and 3rd track	93+895-93+940	platform	45,00	0.20	1,80
Progorelica	left side	97+352-97+386	platform	34,00	0,25	1,40
BOGUTOVAČKA BANJA	between the 1st and 2nd track	100+868-100+919	platform	51,00	0,22	1,80
DOBRE STRANE		NONE	T			
POLUMIR	between the 1st and 2nd track	118+291-118+344	platform	53,00	0,26	1,50
Pusto Polje	left side	123+555-123+589	platform	34,00	0,25	1,00
UŠĆE	between the 1st and 2nd track	127+223-127+281	platform	58,00	0,34	1,50
Lozno	right side	132+832-132+866	platform	34,00	0,22	0,50
JOŠANIČKA BANJA	between the 1st and 2nd track	136+102-136+152	platform	50,00	0,25	1,45
Piskanja	left side	138+842-138+884	platform	42,00	0,21	1,00
BRVENIK	between the 1st and 2nd track left side	143+481-143+528 148+258-148+304	platform	47,00	0,32	1,50
Rvati RAŠKA	between the 1st and 2nd track	152+236-152+353	platform platform	46,00 117,00	0,22	1,00 1,80
KASKA Kaznovići	left side	152+230-152+353	platform	40,00	0,32	1,00
RUDNICA	between the 1st and 2nd track	161+970-162+022	platform	48,00	0,25	1,55
Donje Jarinje	between the 1st and 2nd track	NONE	pianoilli	70,00	0,43	1,33
Jerina Jerina	next to railway line - left	168+865-168+935	arranged surface	70,00	0,20	1,60
	between the 1st and 2nd track	172+294-172+394	platform	100,00	0,35	1,60
LEŠAK	between the 2nd and 3rd track	172+294-172+394	platform	100,00	0,35	1,60
Dren	and and and and and and	NONE	r-moonii	- 50,50	3,00	1,00
LEPOSAVIĆ	between the 1st and 2nd track	182+675-182+775	platform	100,00	0,35	1,60
Pridvorica		NONE	<u>r</u>	9	- ,	,
Sočanica	next to railway line - left	190+000-190+040	platform	40,00	0,35	1,00
IBARSKA SLATINA	,	NONE				
Plandište		NONE				
BANJSKA		NONE				
Valač	between the 1st and 2nd track	208+170-208+230	arranged surface	60,00	0,35	1,00
ZVEČAN	next to 1st track	210+900-211+000	platform	100,00	0,35	1,60
Kosovska Mitrovica Sever	next to railway line - left	213+390-213+440	platform	50,00	0,35	1,60
	110 Subotica - Bo	gojevo - state border - (Er	dut)			
BOGOJEVO		NONE				



		km position of the	DI (C / I	I	Dimensions	S
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Widtl
		of platform		(m)	(m)	(m)
1	2	3	4	5	6	7
SONTA		NONE	1		T T	
PRIGREVICA	between the 1st and 2nd track	58+619-58+649	platform	30,00	0,30	1,55
BUKOVAČKI SALAŠI	between the 2nd and 3rd track	58+619-58+649	platform	30,00	0,30	1,57
BUKUVACKI SALASI	between the 1st and 2nd track	NONE 73+417-73+477	platform	60,00	0,31	1,61
	between the 1st and 2nd track	73+584-73+612	•	28,00	0,05	1,50
	between the 1st and 2nd track	73+673-73+823	arranged surface	150,00	0,05	1,50
SOMBOR	between the 1st and 2nd track	73+417-73+477	platform	60,00	0,38	1,61
	between the 2nd and 3rd track	73+584-73+612	arranged surface	28,00	0,05	1,50
	between the 2nd and 3rd track	73+584-73+701	arranged surface	117,00	0,05	1,50
SVETOZAR MILETIĆ	between the 3rd and 4rd track	83+340-83+397	platform	56,70	0,30	1,68
ALEKSA ŠANTIĆ	between the 2nd and 3rd track	97+500-97-556	platform	55,61	0,30	1,90
BAJMOK	between the 2nd and 3rd track	105+138-105+193	platform	55,00	0,24	1,90
Skenderevo	between the 2nd and 51d track	NONE		33,00	0,23	1,70
TAVANKUT	between the 2nd and 3rd track	115+350-115+400	platform	50,00	0,30	1,80
Ljutovo	between the 2nd and 3rd track	NONE		30,00	0,50	1,00
ŠEBEŠIĆ		NONE				
Subotica predgrađe	next to railway line - left	128+229-128+270	platform	41,00	0,25	1,60
Subotica preugraue	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,23	1,70
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,05	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,25	1,70
SUBOTICA	between the 1st and 2nd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
	111 Belgrade Marshallin			230,00	0,03	1,70
BELGRADE	111 Beigiaue Maishanin					
MARSHALLING YARD A		NONE				
OSTRUŽNICA		NONE				
SURČIN	†	NONE				
Bellent	between the 1st and 2nd track	20+510 - 20+768	platform	258,00	0,35	1,90
BATAJNICA	between the 2nd and 3rd track	20+543 - 20+722	platform	179,00	0,35	1,90
	between the 2nd and 3rd track	20+598 - 20+722	platform	124,00	0,35	1,60
	between the 4th and 5th track	20+598 - 20+722	platform	124,00	0,35	1,60
		shalling Yard "B" - Ostru	1	12.,00	0,00	1,00
BELGRADE	liz beigitud Muis					
MARSHALLING YARD B		NONE				
OSTRUŽNICA		NONE				
	de Marshalling Yard,,A" - Open	line iunction "B" - Open	line junctionK/K	1" - Resnil	ζ.	
BELGRADE						
MARSHALLING YARD A		NONE				
	1					
	next to 1st track	14+080-14+240		160,00	0,55	4,00
RESNIK	next to 1st track between the 1st and 2nd track		arranged surface	160,00 160,00		
RESNIK	between the 1st and 2nd track	14+080-14+240	arranged surface platform	160,00	0,35	4,00 1,55 6,20
RESNIK	between the 1st and 2nd track between the 3rd and 4th track	14+080-14+240 13+943-14+238	arranged surface platform platform			
RESNIK OSTRUŽNICA	between the 1st and 2nd track	14+080-14+240 13+943-14+238	arranged surface platform platform unction "K/K1")	160,00	0,35	1,55
OSTRUŽNICA	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE	arranged surface platform platform unction "K/K1")	160,00 295,00	0,35	1,55
OSTRUŽNICA	between the 1st and 2nd track between the 3rd and 4th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope	arranged surface platform platform unction "K/K1") n line junction "A"	160,00 295,00	0,35	1,55
OSTRUŽNICA 115 Belgr	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE	arranged surface platform platform unction "K/K1") n line junction "A"	160,00 295,00	0,35	1,55
OSTRUŽNICA 115 Belgr BELGRADE	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope	arranged surface platform platform unction "K/K1") n line junction "A"	160,00 295,00	0,35	1,55
OSTRUŽNICA 115 Belgr BELGRADE	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope	arranged surface platform platform unction "K/K1") n line junction "A"	160,00 295,00	0,35	1,55 6,20
OSTRUŽNICA 115 Belgr BELGRADE	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE rd"B") - Open line junction	arranged surface platform platform unction "K/K1") n line junction "A"	160,00 295,00 - (Resnik)	0,35 0,55	1,55 6,20 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE 'd"B") - Open line junction 8+460-8+786	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform	160,00 295,00 - (Resnik)	0,35 0,55	1,55 6,20 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE *d"B") - Open line junction 8+460-8+786 8+637-8+868 8+545-8+865	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform	160,00 295,00 - (Resnik) 326,00 231,00	0,35 0,55 0,55 0,55	1,55 6,20 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Open NONE **Cd.,B") - Open line junction 8+460-8+786 8+637-8+868 8+545-8+865 **Cd.,A" - Open line junction	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform on "T" - Rakovica	160,00 295,00 - (Resnik) 326,00 231,00	0,35 0,55 0,55 0,55	1,55 6,20 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE *d"B") - Open line junction 8+460-8+786 8+637-8+868 8+545-8+865	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform on "T" - Rakovica	160,00 295,00 - (Resnik) 326,00 231,00	0,35 0,55 0,55 0,55	1,55
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Open NONE **Cd.,B") - Open line junction 8+460-8+786 8+637-8+868 8+545-8+865 **Cd.,A" - Open line junction	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform on "T" - Rakovica	160,00 295,00 - (Resnik) 326,00 231,00	0,35 0,55 0,55 0,55	1,55 6,20 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track 117 Belgrade Marshalling Yar	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE 8+460-8+786 8+545-8+865 rd"A" - Open line junction NONE	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform on "T" - Rakovica	160,00 295,00 - (Resnik) 326,00 231,00 320,00	0,35 0,55 0,55 0,55 0,55 0,55	6,10 6,20 6,10 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE MARSHALLING YARD A	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track 117 Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE 4,B") - Open line junction 8+460-8+786 8+545-8+865 d"A" - Open line junction NONE 8+460-8+786 8+637-8+868	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform on "T" - Rakovica platform	160,00 295,00 - (Resnik) 326,00 231,00 320,00	0,35 0,55 0,55 0,55 0,55 0,55	6,10 6,20 6,10 6,10 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE MARSHALLING YARD A	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track 117 Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 3rd and 4th track between the 3rd and 4th track between the 5th and 6th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE 8+460-8+786 8+545-8+865 rd"A" - Open line junction NONE 8+460-8+786 8+637-8+868 8+545-8+865 8+637-8+868 8+545-8+868	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform on "T" - Rakovica platform platform platform platform platform platform platform platform platform	160,00 295,00 - (Resnik) 326,00 231,00 320,00	0,35 0,55 0,55 0,55 0,55 0,55	6,10 6,20 6,10 6,10 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE MARSHALLING YARD A RAKOVICA	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track 117 Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Open NONE *d"B") - Open line junction 8+460-8+786 8+637-8+868 8+545-8+865 *d"A" - Open line junction NONE 8+460-8+786 8+637-8+868 8+545-8+865 d,"B" - Open line junction	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform platform platform platform platform platform platform platform platform platform	160,00 295,00 - (Resnik) 326,00 231,00 320,00	0,35 0,55 0,55 0,55 0,55 0,55	6,10 6,20
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE MARSHALLING YARD A RAKOVICA BELGRADE	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track 117 Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 3rd and 4th track between the 3rd and 4th track between the 5th and 6th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Ope NONE 8+460-8+786 8+545-8+865 rd"A" - Open line junction NONE 8+460-8+786 8+637-8+868 8+545-8+865 8+637-8+868 8+545-8+868	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform platform platform platform platform platform platform platform platform platform	160,00 295,00 - (Resnik) 326,00 231,00 320,00	0,35 0,55 0,55 0,55 0,55 0,55	6,10 6,20 6,10 6,10 6,10 6,10
OSTRUŽNICA 115 Belgr BELGRADE MARSHALLING YARD B RAKOVICA BELGRADE MARSHALLING YARD A RAKOVICA BELGRADE MARSHALLING YARD B	between the 1st and 2nd track between the 3rd and 4th track 114 Ostružnica - Open line ju ade Marshalling Yard,,B" - Open 116 (Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 5th and 6th track 117 Belgrade Marshalling Yar next to 2nd track - right between the 3rd and 4th track between the 3rd and 4th track between the 3rd and 4th track between the 5th and 6th track	14+080-14+240 13+943-14+238 nction "B" - (Open line j NONE n line junction "R" - Open NONE 8+460-8+786 8+545-8+865 d"A" - Open line junction NONE 8+460-8+786 8+637-8+868 8+545-8+865 d,A" - Open line junction NONE NONE	arranged surface platform platform unction "K/K1") n line junction "A" on "R" - Rakovica platform platform platform platform platform platform platform platform platform platform platform platform platform platform platform platform platform platform	326,00 231,00 326,00 231,00 320,00 320,00	0,35 0,55 0,55 0,55 0,55 0,55 0,55	6,10 6,10 6,10 6,20



	I	km position of the		Т	Dimension	20
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
Service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the tracks					
17 4 4 1	(next to left Banat track)	1+123-1+215	platform	92,00	0,55	7,00
Karađorđev park	between the tracks	1.000.1.014	1.46	02.00	0.55	7.00
	(next to right Banat track)	1+222-1+314	platform	92,00	0,55	7,00
		Inđija - Golubinci				
INĐIJA	between the 1st and 2nd track	42+840-42+970	platform	130,00	0,40	1,60
INDIJA	between the 2nd and 3rd track	42+783-42+928	platform	145,00	0,40	1,60
GOLUBINCI	between the 2nd and 3rd track	45+767,00-45+914,00	platform	147,00	0,35	1,60
GOLOBIIVEI	between the 3rd and 4th track	45+767,00-45+914,00	platform	147,00	0,35	1,60
	122 Novi Sad- Novi Sad Mars					
	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00
	between the 11th and 10th track	77+822-77+950	platform	128,00	0,40	3,72
	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20
NOVI SAD	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90
	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75
	between the 12thand 1st track	78+104-78+250	platform	146,00	0,40	8,90
	between the 14 th and 13 th track	78+104-78+249	platform	145,00	0,40	6,46
NOVI SAD		NONE				
MARSHALLING YARD						
123 by-pass track	of Mala Krsna station: (Kolari)			lo28 - (Osij	paonica)	
	124 Open line junction Lapovo			40.00		1.00
Lapovo Varoš	next to right track	106+250-106+310	platform	60,00	0,35	1,60
*	next to left track	106+250-106+310	platform	60,00	0,35	1,60
LAPOVO MARSHALLING		NONE				
YARD	1 2 1 12 1	100 . 700 100 . 600	1.6	120.00	0.25	1.60
LARONO	between the 2nd and 3rd track between the 3 rd and 4 th track	109+560-109+680	platform	120,00	0,35	1,60
LAPOVO		109+560-109+680	platform	120,00	0,35	1,60
	next to 1st track	109+460-109+510	platform	50,00	0,35	1,60
		Marshalling Yard - Među		101.00	0.40	1.00
TRUPALE	between the 2nd and 3rd track	234+893-234+994 234+893-234+994	platform	101,00	0,40	1,60
NIŠ MARSHALLING	between the 4th and 5th track next to 1a. track	238+216-238+289	platform platform	101,00 73,00	0,40	1,60 2,20
YARD	next to 1a. track	238+210-238+289	piationii	73,00	0,40	2,20
MEĐUROVO		NONE				
WEDUKOVO	126 Cryeni K	rst - Niš Marshalling yard				
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00	1,60	0,40
NIŠ MARSHALLING	next to 1a. track	238+216-238+289	platform	73,00	0,40	2,20
YARD	next to run truck	2301210 230120	patronn	73,00	0,10	2,20
11112	127 Niš - Open line june	ction Most - (Niš Marshal	ling Yard)			1
	next to 1st track	243+410-243+763	platform	353,00	0,40	5,80
	between the 2nd and 3rd track	243+410-243+813	platform	403,00	0,40	8,00
NIŠ	between the 4th and 5th track	243+410-243+771	platform	361,00	0,40	8,00
	between the 1b. and 1st track	243+643-243+763	platform	120,00	0,40	5,80
	next to 1a. track	243+660-243+763	platform	103,00	0,40	1,60
128 Connecting to	rack of Niš station: (Crveni Krst					
9		AL RAILWAY LINES		`		
		orgoš - state border - (Rös	zke)			
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
JAVNA SKLADIŠTA	next to railway line - left	2+275-2+385	platform	110,00	0,55	3,00
PALIĆ	next to 2 nd track (right)	7+575-7+685	platform	110,00	0,55	3,00
	next to 4th track	7+575-7+685	platform	110,00	0,55	8,00
Hajdukovo	next to railway line - right	12+002-12+112	platform	110,00	0,55	3,00
BAČKI VINOGRADI	next to 2 nd track (right)	15+360-15+470	platform	110,00	0,55	3,00
	next to 2 nd track (right)	23+995-24+105	platform	110,00	0,55	4,00
HORGOŠ	next to 5th track	23+995-24+105	platform	110,00	0,55	4,00
	202 Pančevo Main St Zren			· · · · · · · · · · · · · · · · · · ·		
PANČEVO MAIN	between the 1st and 2nd track	15+913-16+033	platform	120	0,40	1,60
STATION	between the 1st and 2nd track	16+090-16+210	platform	120	0,40	1,60
					•	*



		km position of the	[I	Dimension	ıs	
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width	
r		of platform	surface	(m)	(m)	(m)	
1	2	3	4	5	6	7	
	between the 2nd and 3rd track	15+913-16+210	platform	297	0,40	1,60	
	between the 3rd and 4th track	15+987-16+137	platform	150	0,40	1.60	
JABUKA		NONE		100	0,.0	1,00	
KAČAREVO	between the 1st and 2nd track	26+784-26+834	platform	50	1,6	0,35	
CREPAJA	between the 1st that 2nd track	NONE		30	1,0	0,55	
DEBELJAČA		NONE					
KOVAČICA	between the 1st and 2nd track	NONE	NONE				
UZDIN	between the 1st and 2nd track	NONE					
	between the 1st and 2nd track	61+920-61+970	platform	50	1,6	0,35	
TOMAŠEVAC	between the 1st and 2nd track		platform		- 1		
ODI OVAT CTALALIĞTE		61+920-61+970	•	50	1,6	0,35	
ORLOVAT STAJALIŠTE	between the 1st and 2nd track	64+025-64+075	platform	50	1,6	0,35	
LUKIĆEVO		NONE					
ZRENJANIN FABRIKA		NONE			1.0	0.55	
	next to 1st track	88+705-88+776	platform	71	1,3	0,55	
ZRENJANIN	between the 1st and 2nd track		NONE				
	between the 2nd and 3rd track		NONE				
ELEMIR		NONE					
MELENCI	between the 2nd and 3rd track		NONE				
KUMANE		NONE					
NOVI BEČEJ		NONE					
BANATSKO MILOŠEVO		NONE					
POLJE		NONE					
	next to 1st track		NONE				
BANATSKO MILOŠEVO	between the 1st and 2nd track		NONE				
	between the 2nd and 3rd track		NONE				
Derić		NONE					
	next to 1st track	160+030-160+166	platform	136,00	0,19	3,30-4,4	
KIKINDA	between the 1st and 2nd track	160+064-160+190	arranged surface	126,00	0.00	1,50	
BANATSKO VELIKO	between the 1st that 2nd track			120,00	0,00	1,50	
SELO		NONE					
	rad (km 7+041) – Belgrade Duna	v - Open line junction Pa	nčevački most – TR	AFFIC SI	ISPENDI	ZD	
200 Beigrade Beigr	204 Topčider Putnička (km 4+				001 21 (2)		
		Miloševo - Senta - Subotio					
	next to 1st track	Those to Benta Bubble	NONE				
BANATSKO MILOŠEVO	between the 1st and 2nd track		NONE				
BIL WITSHE WILLOSE VO	between the 2nd and 3rd track		NONE				
Bočar	between the 1st and 2nd track		NONE				
Ester	between the 1st and 2nd track	NONE					
Estei	between the 1st and 2nd track	NONE	NONE				
PADEJ	between the 2nd and 3rd track		NONE				
Ostojićevo	between the 1st and 2nd track		NONE				
Osiojicevo	between the 1st and 2nd track						
ČOKA			NONE				
COKA	between the 2nd and 3rd track		NONE				
GEN ITT A	between the 3rd and 4th track	102 005 102 050	NONE	45.00	0.15	1.00	
SENTA	between the 1st and 2nd track	102+905-102+950	platform	45,00	0,17	1,90	
Gornji Breg		NONE					
Bogaraš		NONE					
Doline		NONE					
OROM		NONE					
Gabrić		NONE					
Bikovo		NONE					
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70	
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60	
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70	
		176+322-176+838	arranged surface	516,00	0,05	1,70	
	between the 2nd and 3rd track	1/0+322-1/0+636	arranged surrace	310,00	0,05	1,70	
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70	

206 Pančevo Varoš - Open line junction 2a - (Јабука)									
PANČEVO VAROŠ	next to 1st track	18+131-18+223	station plateau	92,00	0,40	1,60			
	between the 1st and 2nd track	18+105-18+345	platform	240,00	0,40	1,60			
	between the 2nd and 3rd track	18+100-18+364	platform	264,00	0,40	1,60			
	207 Novi S	Sad- Odžaci - Bogojevo							
NOVI SAD	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00			



		Т	Dimension	ıç		
Service point	Location	km position of the beginning and the end	Platform/arranged	Length	Height	Width
Service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the 11th and 10th track	77+822-77+950	platform	128,00	0,40	3,72
	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20
	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90
	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75
	between the 2 th and 1 st track	78+104-78+250	platform	146,00	0,40	8,90
	Between 14 th and 13 th track	78+104-78+249	platform	145,00	0,40	6,46
Veternik	Between 14 and 13 track	NONE	plationii	143,00	0,40	0,40
FUTOG		NONE				
PETROVAC - GLOŽAN		NONE				
Bački Maglić		NONE				
GAJDOBRA		NONE				
Parage		NONE				
RATKOVO		NONE				
ODŽACI		NONE				
Odžaci - Kalvarija						
v		NONE				
KARAVUKOVO		NONE NONE				
Bogojevo Selo						
BOGOJEVO	(NOVI CAD) O "	NONE	-Y 0.1. (C)	1:44		
	(NOVI SAD) - Open line junction		icevi- Orlovat Staja	lliste		
RIMSKI ŠANČEVI KAĆ		NONE				
		NONE				
Budisava		NONE				
ŠAJKAŠ		NONE				
Vilovo-Gardinovci		NONE				
Lok		NONE				
TITEL		NONE				
Donji Titel		NONE				
Knićanin		NONE				
PERLEZ		NONE				
FARKAŽDIN		NONE				
ORLOVAT		NONE				
ORLOVAT STAJALIŠTE	between the 1st and 2nd track	64+025-64+075	platform	50,00	1,6	0,35
	arshalling yard separation switch	n No7 - Novi Sad Lokotere	etna - Open line jun	ction SAJ	LOVO	
NOVI						
SADMARSHALLING		NONE				
YARD						
		n line junction 1a - (Luki	ćevo)			
ORLOVAT		NONE				
211	Ruma - Šabac - Open line junct					1.10
	between the 2nd and 3rd track	64+733-64+973	platform	240,00	0,35	1,60
RUMA	between the 3rd and 4th track	64+733-64+973	platform	240,00	0,35	1,60
	between the 4th and 5th track	65+821-64+937	platform	116,00	0,35	1,60
BUĐANOVCI	between the 1st and 2nd track	11+324,00-11+355,00	platform	31,00	0,35	1,60
Nikinci	next to railway line - left	16+657,70-16+688,70	platform	31,00	0,35	1,60
PLATIČEVO	between the 1st and 2nd track	21+293,00-21+323,00	platform	30,00	0,35	1,60
Klenak	next to railway line - right	28+873,15-28+904,15	platform	31,00	0,35	1,60
ŠABAC	between the 1st and 2nd track	32+684,00-32+738,00	platform	54,00	0,40	1,00
Majur	next to railway line - left	3+975-4+025	platform	50,00	0,35	
ŠTITAR	between the 1st and 2nd track	7+713,70-7+735,70	platform	22,00	0,35	1,60
Dublje Mačvansko		NONE				
PETLOVAČA		NONE				
Ribari		NONE				
PRNJAVOR MAČVANSKI		NONE				
Podrinsko Novo Selo		NONE				
LEŠNICA	between the 1st and 2nd track	34+900,00-35+025,00	platform	125,00	2,40	0,55
Jadarska Straža	next to railway line - right	38+860,00-38+940,00	platform	80,00	0,35	1,60
Lipnica		NONE	_			
LOŽNICA		NONE				
Loznica Fabrika		NONE				
KOVILJAČA	between the 1st and 2nd track	56+170,00-56+213,00	platform	43,00	0,35	1,60
Gornja Koviljača	2 22 22 22 22 22 22 22 22 22 22 22 22 2	NONE	1 1	- , - =		,
	between the 2 nd and 3 rd track		platform	142.00	0.35	3.20
BRASINA Donja Borina	between the 2 nd and 3 rd track next to railway line - right	65+212-65+354 68+650-68+750	platform platform	142,00 100,00	0,35 0,35	3,20 1,60



		km position of the		I	Dimensions	<u> </u>
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width
•		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	212 (Platičevo) - Open line j		ction 3 - (Štitar)			
		nć - Kraljevo - Požega	1.6	202.00	0.20	6.40
CTALAĆ	between the 2nd and 3rd track	176+222-176+425	platform	203,00	0,28	6,40
STALAĆ	between the 4th and 5th track	176+222-176+425	platform	203,00	0,28	6,40
	between the 6th and 7th track	176+270-176+378	platform	108,00	0,28	5,30
Mrzenica Makrešane	right side	3+868-3+910 NONE	platform	42,00	0,35	2,00
DEDINA		NONE				
	between the 2nd and 3rd track	14+451-14+626	platform	175,00	0,35	2,84
KRUŠEVAC	between the 3 rd and 4 th track	14+490,3-14+610,3	platform	120,00	0,35	1,60
Čitluk		NONE		120,00	0,00	1,00
KOŠEVI		NONE				
Globoder		NONE				
STOPANJA		NONE				
Donja Počekovina		NONE	i. •			
POČEKOVINA		NONE				
Trstenički Odžaci		NONE				
TRŞTENIK	between the 2nd and 3rd track	42+400-42+500	platform	102,00	0,35	1,80
VRNJAČKA BANJA	between the 2nd and 3rd track	49+136-49+241	platform	105,00	0,35	1,60
Lipova		NONE				
Tominac		NONE				
PODUNAVCI		NONE				
Vraneši		NONE				
Vrba RATINA		NONE NONE				
Sirča	left side	68+880,70-68+940,40	platform	59,70	0,35	1,60
Silca	between the 1st and 2nd track	84+641,9-84+774,9	platform	133	0,30	1,60
KRALJEVO	between the 2nd and 3rd track	84+644,4-84+773	platform	128,6	0,30	1,60
ADRANI	between the 2nd and 3rd track	78+622,20-78+657,20	platform	35,00	0,35	1,60
Mrsać	left side	81+513-81+553	platform	40,00	0,33	0,50
SAMAILA	Total place	NONE		.0,00	0,00	0,00
Goričani	left side	88+610-88+658	platform	48.00	0.37	1,00
MRŠINCI	between the 2nd and 3rd track	92+241-92+279	platform	38.00	0.35	1,00
Kukići		NONE				
ZABLAĆE		NONE				
Baluga		NONE				
V V	left from 1st track	105+500-105+590	platform	90,00	0,44	6,50
ČAČAK	between the 1st and 2nd track	105+494-105+628	platform	134,00	0,37	1,60
T1 × :	between the 2nd and 3rd track	105+494-105+615	platform	121,00	0,38	1,60
Trbušani	next to railway line - left	110+240-110+263	platform	23,00	0,40	1,60
PRIJEVOR	between the 2nd and 3rd track	112+820-113+070	platform	250,00	0,40	1,60
OVČAR BANJA	next to railway line - right	120+450-120+550	platform	100,00	0,40	1,60
Jelen Do	between the 1st and 2nd track next to railway line - right	120+450-120+652 127+180-127+230	platform platform	202,00 50,00	0,35 0,40	1,60 1,60
DRAGAČEVO	between the 2nd and 3rd track	128+295-128+405	platform	110,00	0,40	1,60
Gugali	octween the 2nd and 3nd track	NONE		110,00	0,40	1,00
Boračko		NONE				
	next to 1st track	140+720-140+975	platform	255,00	0,45	10,00
POŽEGA	between the 2nd and 3rd track	140+675-140+984	platform	309,00	0,45	6,20
214 connecting track	of Kraljevo station: (Mataruška I		1		,	
	track of Požega station: (Uzićo) - s					•
	216 Smederevo – Open line					
SMEDEREVO	between the 1st and 2nd track	0+000-0+103	platform	103,00	0,40	1,60
	between the 2nd and 3rd track	0+000-0+105	platform	105,00	0,40	1,60
Godomin	next to railway line - left	3+303-3+350	platform	47,00	0,40	1,60
RADINAC	next to 1st track	6+650-6+800	platform	150,00	0,50	2,20
	between the 2nd and 3rd track	6+650-6+800	platform	150,00	0,60	6,20
Vranovo	next to railway line - left	9+475-9+537	platform	62,00	0,40	1,90
	between the 1st and 2nd track	69+030-69+175	platform	145,00	0,40	1,90
MALA KRSNA	between the 2nd and 3rd track	69+030-69+175	platform	145,00	0,40	1,9
	between the 3rd and 4th track	69+042-69+184	platform	142,00	0,40	1,90
	between the 4th and 5th track	69+080-69+230	platform	150,00	0,40	1,90
	217 Open line junc	ction Jezava – Smederevo	Luka			



	T	km position of the	<u> </u>	ī	Dimensions	,			
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width			
Service point	Location	of platform	surface	(m)	(m)	(m)			
1	2	3	4	5	6	7			
	218 Mala Krsna - Bor -	Open line junction "2" - (\	/ražogrnac)						
	between the 1st and 2nd track	69+030-69+175	platform	145,00	0,40	1,90			
MALA KRSNA	between the 2nd and 3rd track	69+030-69+175	platform	145,00	0,40	1,90			
MALA KRSNA	between the 3rd and 4th track	69+042-69+184	platform	142,00	0,40	1,90			
	between the 4th and 5th track	69+080-69+230	platform	150,00	0,40	1,90			
Ljubičevski most		NONE							
POŽAREVAC	between the 1st and 2nd track	87+703-87+826	platform	123,00	0,40	1,80			
	between the 2nd and 3rd track	87+712-87+816	platform	104,00	0,40	1,60			
Jugovićevo Sopot Požarevački	next to track - left	89+078-89+094 90+082-90+107	platform platform	16,00 24,00	0,50 0,40	1,00 1,60			
BUBUŠINAC-BRATINAC	next to track -right	90+082-90+107 NONE	piationii	24,00	0,40	1,00			
Bare - Kasidol		NONE							
STIG	between the 1st and 2nd track	102+693-102+764	platform	71,00	0,40	1.60			
Majilovac	Secured the 1st and 2nd that	NONE	pianomi	, 1,00	0,.0	1,00			
SIRAKOVO	between the 1st and 2nd track	109+026-109+079	platform	53,00	0,40	1,60			
LJUBINJE	between the 1st and 2nd track	116+381-116+444	platform	63,00	0,40	1,60			
Češljeva Bara	next to railway line - left	122+138-122+200	platform	62,00	0,40	1,60			
RABROVO-KLENJE	between the 1st and 2nd track	126+007-126+067	platform	60,00	0,40	1,60			
Mustapić		NONE							
Mišljenovac		NONE							
ZVIŽD		NONE							
Kučevska Turija		NONE							
KAONA KUČEVO		NONE NONE							
Neresnica		NONE							
Neresnica (tov.)	NONE								
Voluja		NONE							
BRODICA	between the 2nd and 3rd track	164+515-164+576	platform	61,00	0,40	1,60			
Bosiljkovac		NONE		,					
Blagojev Kamen		NONE							
MAJDANPEK	between the 2nd and 3rd track	178+769-178+920	platform	151,00	0,35	1,60			
Debeli Lug	next to railway line - left	181+300-181+318	platform	18,00	0,35	1,60			
LESKOVO	between the 2nd and 3rd track	187+660-187+722	platform	62,00	0,35	1,60			
Jasikovo	next to railway line - left	191+810-191+890	arranged surface	80,00	0,09	1,60			
Vlaole Selo	next to railway line - right	194+740-194+780	arranged surface	40,00	0,20	1,60			
VLAOLE	between the 2nd and 3rd track	197+163-197+224	platform	61,00	0,35	1,60			
Gornjane	next to railway line - right	200+288-200+386	arranged surface	98,00	0,35	1,60			
CEROVO Kriveljski most	next to railway line - right	NONE 207+905-207+995	arranged surface	90.00	0,35	1,60			
Kriveljski potok	next to railway line - left	211+873-211+913	arranged surface	40,00	0,35	1,60			
MALI KRIVELJ	between the 1st and 2nd track	215+171-215+206	platform	35,00	0,35	1,60			
Brezonik	next to railway line - left	217+490-217+540	platform	50,00	0,35	1,60			
	next to 1st track	221+369-221+452	platform	83,00	0,35	8,00			
BOR	between the 2nd and 3rd track	221+352-221+452	platform	100,00	0,35	1,60			
BOR FREIGHT STATION	between the 2nd and 3rd track	224+320-224+375	platform	55,00	0,35	1,60			
BORSKA SLATINA		NONE							
ZAGRAĐE		NONE							
RGOTINA	between the 1st and 2nd track	244+658-244+738	platform	80,00	0,35	1,60			
CD1/ED1/1/1/2		rst - Zaječar – Prahovo Pr		150.00	0.40	1			
CRVENI KRST	between the 2nd and 3rd track	240+842-240+994	platform	152,00	0,40	1,60			
Pantelej	next to railway line - left	7+455-7+507	platform	52,00	0,35	1,60			
MATEJEVAC Gornja Vrežina	between the 1st and 2nd track	12+370-12+395 NONE	platform	25,00	0,35	1,50			
Jasenovik		NONE							
GRAMADA	between the 1st and 2nd track	30+232-30+282	platform	50,00	0,35	1,60			
Hadžićevo	octwood the 1st and 2nd track	NONE	pianomi	50,00	0,55	1,00			
SVRLJIG	between the 1st and 2nd track	39+925-40+075	platform	150,00	0,35	1,60			
Niševac	next to railway line - right	46+002-46+018	platform	16,00	0,35	1,60			
PALILULA	between the 1st and 2nd track	49+320-49+355	platform	35,00	0,35	1,60			
Svrljiški Miljkovac		NONE	· • • • • • • • • • • • • • • • • • • •		· · · · · · · · · · · · · · · · · · ·				
PODVIS	between the 1st and 2nd track	60+853-60+903	platform	50,00	0,35	1,60			
Rgošte		NONE							
KNJAŽEVAC	between the 1st and 2nd track	68+338-68+392	platform	54,00	0,35	1,60			



		km position of the		T	Dimension	3			
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width			
_		of platform	surface	(m)	(m)	(m)			
1	2	3	4	5	6	7			
Gornje Zuniče	next to railway line - right	72+080-72+142	platform	62,00	0,35	1,60			
Donje Zuniče	next to railway line - right	74+988-75+076	platform	88,00	0,35	1,60			
MINIĆEVO	between the 1st and 2nd track between the 2nd and 3rd track	81+830-81+930 81+930-81+975	platform platform	100,00 45,00	0,35 0,35	1,60 1,60			
Selačka Reka	next to railway line - right	84+450-84+500	arranged surface	50,00	0,35	1,60			
Mali Izvor	next to railway line - right	88+180-88+230	platform	50,00	0,35	1,60			
Vratarnica	between the 1st and 2nd track	96+048-96+098	platform	50,00	0,35	1,60			
GRLJAN	between the 1st and 2nd track	102+955-103+105	platform	150,00	0,35	1,60			
Timok	next to railway line - left	107+320-107+380	arranged surface	60,00	0,35	1,60			
	between the 1st and 2nd track	111+622-111+820	platform	198,00	0,35	1,60			
ZAJEČAR	between the 2nd and 3rd track	111+662-111+815	platform	153,00	0,35	1,60			
V	between the 3rd and 4th track	111+651-111+803	platform	152,00	0,35	1,60			
VRAŽOGRNAC	between the 1st and 2nd track	118+760-118+910	platform	150,00	0,35	1,60			
TRNAVAC	between the 1st and 2nd track	124+593-124+668	platform	75,00	0,35	1,60			
Čokonjar Sokolovica	next to railway line - left next to railway line - right	128+500-128+550 131+100-131+125	platform platform	50,00 25,00	0,35 0,35	1,60 1,60			
TABAKOVAC	between the 1st and 2nd track	136+170-136+223	platform	53,00	0,35	1,60			
Tabakovačka reka	next to railway line - right	138+740-138+790	platform	50,00	0,35	1,60			
BRUSNIK	between the 1st and 2nd track	145+616-145+696	platform	80,00	0,35	1,60			
Tamnič	next to railway line - right	148+420-148+480	platform	60,00	0,35	1,60			
Crnomasnica	next to railway line - right	151+323-151+364	platform	41,00	0,35	1,60			
Rajac	next to railway line - right	154+430-154+505	platform	75,00	0,35	1,60			
ROGLJEVO	between the 1st and 2nd track	156+795-156+875	platform	80,00	0,35	1,60			
Veljkovo		NONE							
Mokranja		NONE							
Kobišnica	NONE between the 2nd and 3rd track 174+049-174+199 platform 150,00 0,35								
NEGOTIN PRAHOVO	between the 2nd and 3rd track	181+974-182+054	platform	150,00 80,00	0,35	1,60 1,60			
PRAHOVO PRISTANIŠTE	between the 2nd and 3rd track	NONE	piationii	80,00	0,35	1,00			
TRANSFERRE	220 (Rgotina) - Open line juncti		on "1" - (Trnavac)						
V		n line junction "1" - Kurš							
KURŠUMLIJA	222 1/2	NONE							
KURŠUMLIJA	222 KI	uršumlija - Kastrat NONE							
KOKSCIVILIST	223 Doljevac - Kas	strat – Merdare - Kosovo	Polje						
DOLIEVAC	between the 1st and 2nd track	261+419-261+527	platform	108	0,40	1,60			
DOLJEVAC	between the 2nd and 3rd track	261+419-261+526	platform	107	0,40	1,60			
Šajinovac		NONE							
Toplički Badnjevac	NONE								
Jasenica		NONE							
ŽITORAĐA		NONE		72 00	0.40	4 40			
Žitorađa Centar	next to railway line - left	10+925-10+977	platform	52,00	0,40	1,60			
Rečica Lukomir		NONE NONE							
Podina		NONE							
Babin Potok	next to railway line - right	18+726-18+774	platform	48,00	0,40	1,60			
PROKUPLJE	between the 1st and 2nd track	22+257-22+370	platform	113,00	0,40	1,60			
Gornja Draganja	next to railway line - left	24+990-25+027	platform	37,00	0,40	1,60			
Toplička Mala Plana		NONE				·			
Bresničići		NONE							
BELOLJIN		NONE							
Toplica Milan		NONE							
Pločnik		NONE							
Barlovo		NONE							
Novoselske Livade NONE Pepeljevac NONE									
Pepeljevac NONE Rasputnica Kastrat NONE									
Visoka		NONE							
Ljuša		NONE							
Rudare		NONE							
Dešiška		NONE							
KOSANIČKA RAČA		NONE							
Kosanica		NONE							
1100411104									



		km position of the		ī	Dimension	10
Service point	Location	beginning and the end	Platform/arranged	Length	Height	Width
Service point	Location	of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
Kosančić Ivan	NONE					,
Vasiljevac		NONE				
Merdare		NONE				
	224 Kosovo	Polje - Metohija – Peć**				
		t - Open line junction 1 - ((Drenica) **			
		Vrbas - Sombor	· · · · · · · · · · · · · · · · · · ·			
	between the 2nd and 3rd track	116+702-116+770,3	platform	68,00	0,35	1,40
VRBAS	between the 3rd and 4th track	116+702-116+770,3	platform	68,00	0,35	1,40
KULA	between the 2nd and 3rd track	47+626-47+667	platform	41,00	0,25	1,52
CRVENKA	between the 1st and 2nd track	54+956-54+986	platform	30,00	0,15	1,56
SIVAC		NONE	•		1	
Novi Sivac		NONE				
KLJAJIĆEVO	between the 1st and 2nd track	75+417-75+456	platform	39,00	0,15	1,38
Čonoplja	between the 1st and 2nd track	79+692-79+722	platform	30,00	0,15	1,31
	between the 1st and 2nd track	73+417-73+477	platform	60,00	0,31	1,61
	between the 1st and 2nd track	73+584-73+612	arranged surface	28,00	0,05	1,50
COMPOR	between the 1st and 2nd track	73+673-73+823	arranged surface	150,00	0,05	1,50
SOMBOR	between the 2nd and 3rd track	73+417-73+477	platform	60,00	0,38	1,61
	between the 2nd and 3rd track	73+584-73+612	arranged surface	28,00	0,05	1,50
	between the 3rd and 4th track	73+584-73+701	arranged surface	117,00	0,05	1,50
			<u> </u>			
	LOCAI	RAILWAY LINES				
	301 Subotica - Subotica Fabrika		OUT OF SERVICE			
		ica - Subotica Bolnica	701 01 521(102			
	between the 1st and 2nd track	176+360-176+414	arranged surface	54,00	0,05	1,70
	between the 1st and 2nd track	176+414-176+487	platform	73,00	0,25	1,60
SUBOTICA	between the 1st and 2nd track	176+487-176+838	arranged surface	351,00	0,05	1,70
	between the 2nd and 3rd track	176+322-176+838	arranged surface	516,00	0,05	1,70
	between the 3rd and 4th track	176+335-176+573	arranged surface	238,00	0,05	1,70
	303 Novi Sad(km	1+042) - Novi Sad Ložior		·		
	next to 11th track	77+836-77+950	platform	114,00	0,40	3,00
	between the 11th and 10th	77+822-77+950	mlatform.	129.00	0.40	2.72
	track	11+822-11+930	platform	128,00	0,40	3,72
NOVI SAD	between the 10th and 1st track	77+835-77+887	platform	52,00	0,40	4,20
NOVISAD	next to 1st track	77+835-78+250	platform	415,00	0,40	4,20-8,90
	between the 2nd and 4th track	77+843-78+181	platform	338,00	0,40	8,75
	између 12. и 1. колосека	78+104-78+250	platform	146,00	0,40	8,90
	између 14. и 13. колосека	78+104-78+249	platform	145,00	0,40	6,46
	304 Podbara - Open line jun					
305	5 (Rimski Šančevi) - Open line ju		nction "3" - (Podba	ra)		
7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	306 Ri	mski Šančevi- Bečej				
RIMSKI ŠANČEVI		NONE				
Bački Jarak		NONE				
TEMERIN		NONE				
GOSPOĐINCI		NONE				
ŽABALJ		NONE				
ČURUG		NONE				
Bačko Gradište		NONE				
Bečej predgrađe		NONE				
BEČEJ	200 /P : > 2 **	NONE				
ZVODNIIZ CD AD	308 (Brasina) - Open line					
ZVORNIK GRAD	200 D ¥	NONE				
	next to 1st track	Varoš - Pančevo Vojlovica 18+131-18+223	station plateau	92,00	0,40	1,60
PANČEVO VAROŠ	between the 1st and 2nd track	18+131-18+223	platform	240,00	0,40	1,60
FANCEVO VAROS	between the 1st and 2nd track		•			
Pančevo Strelište	next to railway line - left	18+100-18+364 1+290-1+400	platform platform	264,00 110,00	0,40	1,60 1,60
	between the 3rd and 4th track	2+632-2+852	platform	220,00	0,40	1,60
PANČEVO VOJLOVICA	next to 4th track	2+645-2+965	platform	220,00	0,40	1,60
310 Connecting	g track of Senta station: (Čoka)					1,00
310 Connecting		ilajnac – Despotovac – (Re		11023 - (UI	JIII)	
MARKOVAC	between the 2nd and 3rd track	100+400-100+450	platform	50	0.4	1.6
MINICOVAC	between the 2nd and 31d track	100 1 400-1007430	pianoiiii	50	0.4	1.0



		km position of the	D1.4C / 1	Ι	Dimensior	ıs
Service point	Location	beginning and the end	Platform/arranged surface	Length	Height	Width
		of platform	surface	(m)	(m)	(m)
1	2	3	4	5	6	7
	between the 3rd and 4th track	100+350-100+452	platform	102	0.4	1.6
	between the 4th and 5th track	100+350-100+448	platform	92	0.4	1.6
	312 M	etohija - Prizren**				
	313 V	ršac – Bela Crkva				
VRŠAC	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
VRSAC	between the 2nd and 3rd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
Potporanj		NONE				
Straža		NONE				
JASENOVO		NONE				
Crvena Crkva		NONE				
	between the 1st and 2nd					4.40
BELA CRKVA	track	119+052-119+082	platform	30,00	0,30	1,60
	SH	UNTING LINES	•	· · · · · · · · · · · · · · · · · · ·		
		ac - Vršac Vašarište				
TYD Ž L G	between the 1st and 2nd track	82+807,5-82+902,5	platform	95,00	0,40	1,60
VRŠAC	between the 2nd and 3rd track	82+807,5-87+902,5	platform	95,00	0,40	1,60
	402 Kikinda – Metano	olsko sirćetni kompleks (k	m 6+413)			
KIKINDA	next to 1st track	160+030-160+166	platform	136,00	0,19	3,30-4,40
KIKINDA	between the 1st and 2nd track	160+064-160+190 arranged surface		126,00	0,00	1,50
	403 Bogojevo – Dunavs	ka Obala – TRAFFIC SU	SPENDED			
	404 Paraćin – Stari P	opovac - TRAFFIC SUSP	ENDED			
	405 Sur	čin – Jakovo-Bečmen				
SURČIN		NONE				
		ča Nova - state border - (E			_	
	between the 1st and 2nd track	116+300-116+490	arranged surface	190,00	0,10	2,50
ŠID	between the 2nd and 3rd track	116+300-116+665	platform.	365,00	0,45	1,60
	between the 3rd and 4th track	116+300-116+677	platform	377,00	0,45	1,60
Adaševci		NONE	_			_
MOROVIĆ	between the 1st and 2nd track	12+360-12+390	platform	30,00	0,35	1,60
VIŠNJIĆEVO	between the 1st and 2nd track	19+633-19+655	platform	22,00	0,35	1,60
Rasputnica Rača		NONE				
SREMSKA RAČA NOVA	between the 1st and 2nd track	24+169-24+205	platform	36,00	0,35	1,60
		Skela - TRAFFIC SUSP	ENDED			
		ta – Apatin Fabrika				
	409 Bačka Palanka – G	Sajdobra - TRAFFIC SUS	PENDED			

Note: In column one halts are marked with small letters and all other service points with capital letters.



^{*} not intended for handling of passengers

** The lines on the territory of Kosovo and Metohija are temporarily under the supervision of UNMIK, according to the Temporary

Agreement between ŽTP Belgrade and UNMIK railways, dated May 31, 2002 (records No 300/2002 - 153 dated May 31, 2002).

Appendix 9 Method for calculation of electricity consumption for train traction

Compensation for calculation of electricity consumption for train traction is determined as follows:

$$Csv/brtkm = \frac{MES.RAČ-TROŠ.INF}{BRTKMter + K*BRTKMput}$$

where:

Csv/brtkm – monthly rate of electric energy spent for train traction, expressed in RSD per grosstonne km.

MES.RAČ – monthly bill amount for high voltage electric energy issued by electric energy supplier.

TROŠ.INF – monthly expenses for electric energy for train traction need used by "Infrastruktura železnice Srbije"

BRTKMter – total (all railway undertakings) monthly freight transport expressed in gross-tonne km.

K – coefficient by means of which is taken into consideration that passenger trains consume more electric energy per gross-tonne km than freight trains.

BRTKMput – total (all railway undertakings) monthly passenger transport expressed in gross-tonne km.

The compensation amount per individual RU is calculated by multiplication of monthly rate of electrical energy for train traction with gross-tonne kilometers realized by the respective RU (BRTKMter for freight service, and K* BRTKMput for passenger service):

Ntern = Csv/btkm * BRTKMtern for freight service, i.e

Nputn = Csv/btkm * K * BRTKMputn for passenger service,

where:

Ntern – compensation paid by x RU in freight service for the consumption of electrical traction, expressed in RSD.

BRTKMtern – gross-tonne kilometres realized by x RU in freight service in the given month.

Nputn - compensation paid by x RU in passenger service for the consumption of electrical traction, expressed in RSD.

BRTKMputn - gross-tonne kilometres realized by x RU in passenger service in the given month.

The compensation is paid to Infrastructure Manager on a monthly basis, based on the issued bill.

K coefficient values are as follows:

month	I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII
K	2	1,8	1,7	1,5	1,35	1,4	1,4	1,4	1,35	1,5	1,7	1,9



Appendix 10 Railway node boundaries

Node	Border station (service point) of the node	Chainage of the station (service point)	Entry signal from the direction	Railway line	Chainage of mandatory signal	Distance [m]
	Batajnica	19+031 ^P / 20+616 ^T	Nova Pazova	101 Belgrade Center - Stara Pazova - Šid - state border - (Tovarnik)	19+960 ^P / 21+396 ^T 13+550 /	929 ^P / 780 ^T
٥	Ovča	12+555 / 12+653	Pančevo Main St.	Main 107 Belgrade Denter - Pančevo Main St Vršac - state border - (Stamora Moravita)		995
BEOGRAD	Jajinci	10+988	Beli Potok (Mala Krsna)	103 (Belgrade Center) - Rakovica - Jajinci - Mala Krsna - Velika Plana	12+045	1057
BEC	Resnik	14+059	Pinosava (Mladenovac)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	14+848	789
	Resnik	0+000	Bela Reka (Valjevo)	108 (Belgrade Center) - Resnik - Požega - Vrbnica - state border - (Bijelo Polje)	0+825	825
	Naumovićevo	167+180	Žednik (Vrbas)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	166+376	804
SUBOTICA	Palić	7+657	Bački Vinogradi (Horgoš)	201 Subotica - Horgoš - state border - (Roszke)	8+614	957
IBOI	Subotica	76+685	Orom (Senta)	205 Banatsko Miloševo - Senta - Subotica	75+016	1669
SI	Subotica Freight St.	75+861	Orom (Senta)	205 Banatsko Miloševo - Senta - Subotica	75+016	845
	Šebešić	123+761	Tavankut (Sombor)	110 Subotica - Bogojevo - state border - (Erdut)	122+915	846
	Sajlovo rasp. i odj.	3+595	Futog (Bogojevo)	207 Novi Sad - Odžaci - Bogojevo	3+890	295
AD	Sajlovo rasp. i odj.	81+635	Kisač (Vrbas)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	82+007	372
NOVI SAD	Sajlovo rasp. i odj.	3+595	Rimski Šančevi (Orlovat)	208 (Novi Sad) - Open line junction Sajlovo - Rimski Šančevi - Orlovat Stajalište	3+959	364
	Petrovaradin	70+870	Sremski Karlovci (Inđija)	105 (Belgrade Center) - Stara Pazova - Novi Sad - Subotica - state border - (Kelebia)	69+870	1000
0.	Lapovo Varoš	106+302	Markovac (Velika Plana)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	105+710	592
LAPOVO	Lapovo	109+597	Bagrdan (Stalać)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	110+540	943
	Batočina	3+405	Badnjevac (Kragujevac)	109 Lapovo - Kraljevo - Lešak - Kosovo Polje - Đeneral Janković - state border - (Volkovo)	4+419	1014
	Trupale	234+939	Grejač (Stalać)	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	233+934	1005
>⊠	Crveni Krst	0+000	Matejevac (Zaječar)	219 (Niš) - Crveni krst - Zaječar - Prahovo Pristanište	(0+957=3+455) 3+736	1238
NIŠ	Međurovo	249+462	Doljevac	102 Belgrade Center - Open line junction "G" - Rakovica - Mladenovac - Lapovo - Niš - Preševo - state border - (Tabanovce)	250+323	861
	Ćele Kula	5+461	Niška Banja (Pirot)	106 Niš - Dimitrovgrad - state border - (Dragoman)	6+320	859
٧٥	Pančevo Main St.	16+069	Ovča (Beograd)	107 Belgrade Center - Pančevo Main St Vršac - state border - (Stamora Moravita)	14+878	1191
PANČEVO	Pančevo varoš	18+206	Banatsko Novo Selo (Vršac)	107 Belgrade Center - Pančevo Main St Vršac - state border - (Stamora Moravita)	19+242	1036
PA	Open line junction 2a	17+659	Jabuka (Zrenjanin)	202 Pančevo Main St Zrenjanin - Kikinda - state border - (Jimbolia)	18+160	501

P – passenger traffic (from the direction of Novi Sad) F- freight traffic (mixed, from the direction of Šid)

